



1.1kw~7.5kw



9.2kw~22kw

Application

- Water supply: filtration and transfer at waterworks, regional water supply and pressure boosting in main pipe
- Industrial pressure boosting: Water system, cleaning system
- Industrial water supply: boiler feeding, cooling system, air conditioning, transportation of light acid and alkali liquid
- Water treatment: distillation systems, separators, swimming pools
- Agricultural irrigation, petrochemical industry, medicine and sanitation, etc.

Operating Conditions

- Thin, clean, non-flammable and explosive, not containing the liquid with solid particles and fibers
- Liquid temperature: -15°C - +80°C
- Flow range: 0.7 - 132 m³/h
- Head range: 9 - 58 m
- Ambient temperature range: -15°C - +40°C
- Max. operation: 10 bar
- Altitude: up to 1000 m
- Liquid PH value: 3 - 9
- Max. ambient temperature: +40°C

Motor

- IE2 Motor (IE3 motor available on request for power ≥ 9.2kw)
- Totally enclosed & fan-cooled
- Protection class: IP55
- Insulation class: F

Identification Codes

XZS 65- 50- 160/40

- Rated Power (x100 W)
- Impeller Nominal Diameter (mm)
- Outlet Diameter (mm)
- Inlet Diameter (mm)
- LEO Stainless Steel Standard Centrifugal Pump

Accessories on Request



AISI304 Threaded flange



Flange gasket



Materials Table

1.1kw~7.5kw

No.	Part	Material	No.	Part	Material
1	Pump body	06Cr19Ni10	11	Fan	PP
2	Impeller	06Cr19Ni10	12	Fan cover	08F
3	O-ring	NBR	13	Rear cover	ZL102
4	Support	HT200	14	Nameplate	06Cr19Ni10
5	Oil seal		15	Stator	
6	Bearing		16	Terminal cover	ZL102
7	Rotor		17	Terminal board	
8	Stand	HT200	18	Cable holder	
9	Bearing		19	Support cover	06Cr19Ni10
10	Oil seal		20	Mechanical seal	

9.2kw~22kw


No.	Part	Material
1	Pump body	06Cr19Ni10
2	Impeller	06Cr19Ni10
3	O-ring	NBR
4	Support cover	06Cr19Ni10
5	Support	HT200
6	Motor	
7	Rotor	06Cr19Ni10/45
8	Nameplate	06Cr19Ni10
9	Guard plate	06Cr19Ni10
10	Mechanical seal	

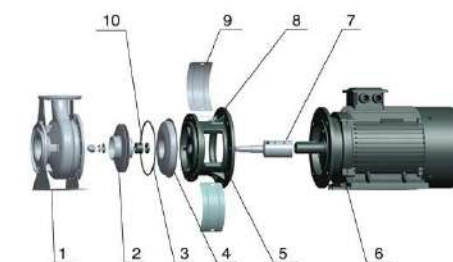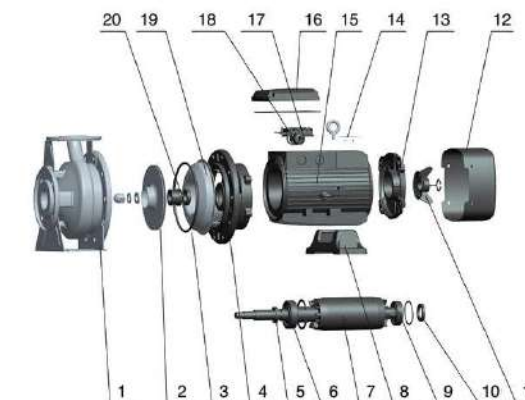

How to Read The Curve Charts

The thin curves indicate the duty range where long-time operation is not allowed


The bold curves indicate the duty range where long-time operation is permitted for best efficiency

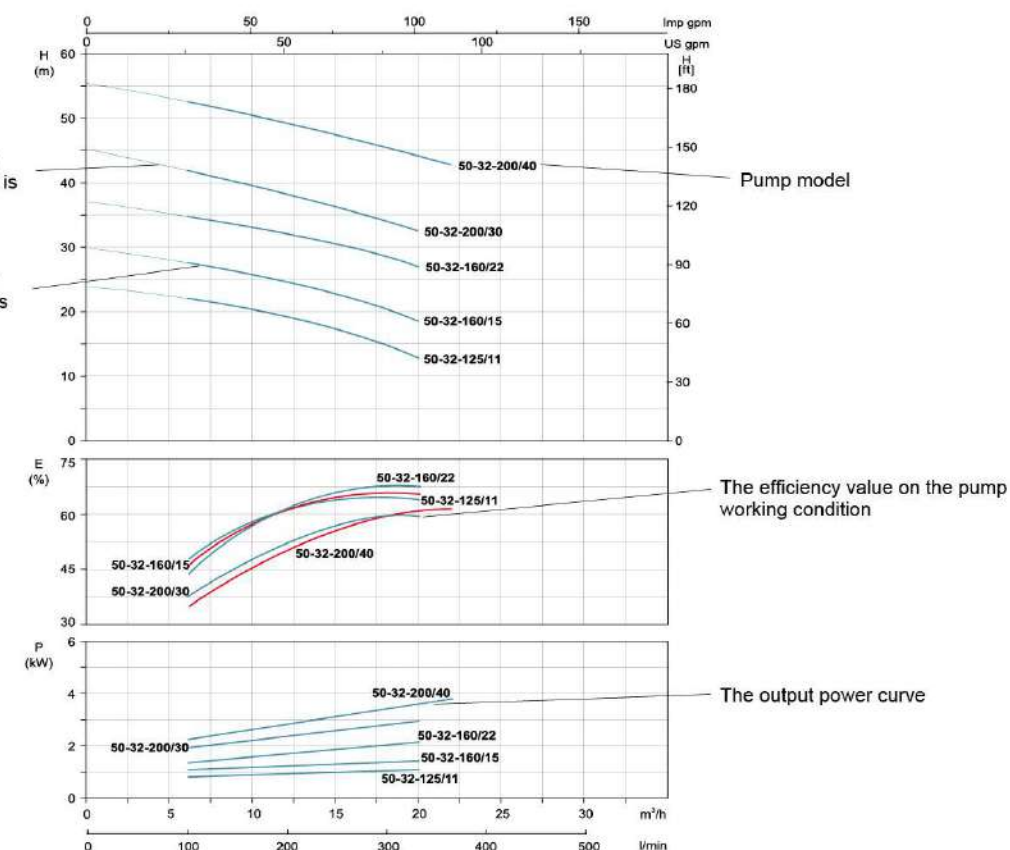

Ambient Temperature

Max. Ambient temperature: +40°C. Ambient temperature above 40°C, or installation at altitude of more than 1000 m above sea level, require the use of an oversize motor. Because of low air density and poor cooling effects, the motor output power P2 will be decreased. See the picture.

For example, when the pump is installed at altitude of more than 3500 m above sea level, P2 will be decreased to 88%. When the ambient temperature is 70°C, P2 will be decreased to 78%.

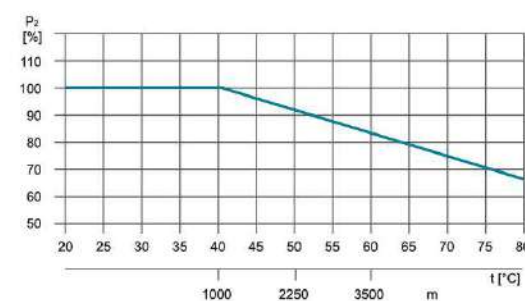


Technical Data


MODEL		Power		Q (m³/h)	Q=DELIVERY																							
					0	6	9	12	18	20	22	24	27	30	36	42	48	60	72	90	108	114	120	126	132			
GB5662 Standard	EN733 Standard	kW	HP	Q (l/min)	0	100	150	200	300	333	360	400	450	500	600	700	800	1000	1200	1500	1800	1900	2000	2100	2200			
XZS50-32-125/11		1.1	1.5	H (m)	24	21.5	20.5	19.5	16	13	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
XZS50-32-160/15		1.5	2		29.5	27	26	25	21	18	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
XZS50-32-160/22		2.2	3		37	33.5	32.5	32	28.5	27	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
XZS50-32-200/30		3	4		45	41	40	38	34	32	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
XZS50-32-200/40		4	5.5		55	51	50	49	46	45	43	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
XZS65-50-125/15	XZS65-40-125/15	1.5	2		20	-	-	19	18	17	16.5	15	14	12.5	10	-	-	-	-	-	-	-	-	-	-	-		
XZS65-50-125/22	XZS65-40-125/22	2.2	3		26	-	-	23.5	22.5	22	21.5	21	20.5	19.5	16.5	-	-	-	-	-	-	-	-	-	-	-		
XZS65-50-160/30	XZS65-40-160/30	3	4		31	-	-	29	27.5	27	26.5	25.5	25	24	22	19	-	-	-	-	-	-	-	-	-	-		
XZS65-50-160/40	XZS65-40-160/40	4	5.5		39	-	-	35.5	34.5	34	33.5	32.5	32	31	29	26	-	-	-	-	-	-	-	-	-	-		
XZS65-40-200/55		5.5	7.5		47	-	-	43	42.5	42	41.5	41	40.5	39	37	33	-	-	-	-	-	-	-	-	-	-		
XZS65-40-200/75		7.5	10		57	-	-	53	52.5	52	51	50	49	48	46.5	44.5	-	-	-	-	-	-	-	-	-	-		
XZS80-65-125/30	XZS65-50-125/30	3	4		22.5	-	-	-	-	-	-	20	19.5	19	18.5	17.5	16	13	9	-	-	-	-	-	-	-		
XZS80-65-125/40	XZS65-50-125/40	4	5.5		25.5	-	-	-	-	-	-	23	22.5	22	21.5	20.5	20	17	13.5	-	-	-	-	-	-	-		
XZS80-65-160/55	XZS65-50-160/55	5.5	7.5		33	-	-	-	-	-	-	29.5	29	28.5	28	27	26	24	20	-	-	-	-	-	-	-		
XZS80-65-160/75	XZS65-50-160/75	7.5	10		39	-	-	-	-	-	-	36	35	34.5	34	33.5	32.5	29	24	-	-	-	-	-	-	-		
*XZS80-50-200/92	XZS65-50-200/92	9.2	12.5		53	-	-	-	-	-	-	-	-	48	47.5	46.5	44.5	39.5	34	-	-	-	-	-	-	-		
*XZS80-50-200/110	XZS65-50-200/110	11	15		57.5	-	-	-	-	-	-	-	-	53	51	50.5	50	47	41	-	-	-	-	-	-	-		
XZS100-80-125/40		4	5.5		20	-	-	-	-	-	-	-	-	-	-	17.5	16.5	15.5	14	12	7	-	-	-	-	-		
XZS100-80-125/55		5.5	7.5		23	-	-	-	-	-	-	-	-	-	-	21.5	20.5	20	18	16	12	7.5	-	-	-	-		
XZS100-80-125/75	XZS80-65-125/75	7.5	10		29	-	-	-	-	-	-	-	-	-	-	27.5	26.5	25.5	23.5	21.5	17.5	13	12	-	-	-		
*XZS100-80-160/92	XZS80-65-160/92	9.2	12.5		33	-	-	-	-	-	-	-	-	-	-	31	30	28	26	23	23	-	-	-	-	-		
*XZS100-80-160/110	XZS80-65-160/110	11	15		38.5	-	-	-	-	-	-	-	-	-	-	36	35	33	31	28	28	-	-	-	-	-		
* XZS100-65-200/150		15	20		47	-	-	-	-	-	-	-	-	-	-	-	44	43	41	39	36	32	30	28	26	23		
* XZS100-65-200/185		18.5	25		53	-	-	-	-	-	-	-	-	-	-	-	51	50	49	48	45	41	39	37	35	33		
* XZS100-65-200/220		22	30	58	-	-	-	-	-	-	-	-	-	-	-	57	56	55	54	51	47	45.5	44	42	40			

* =IE3 motor optional on request.


Characteristic Curves

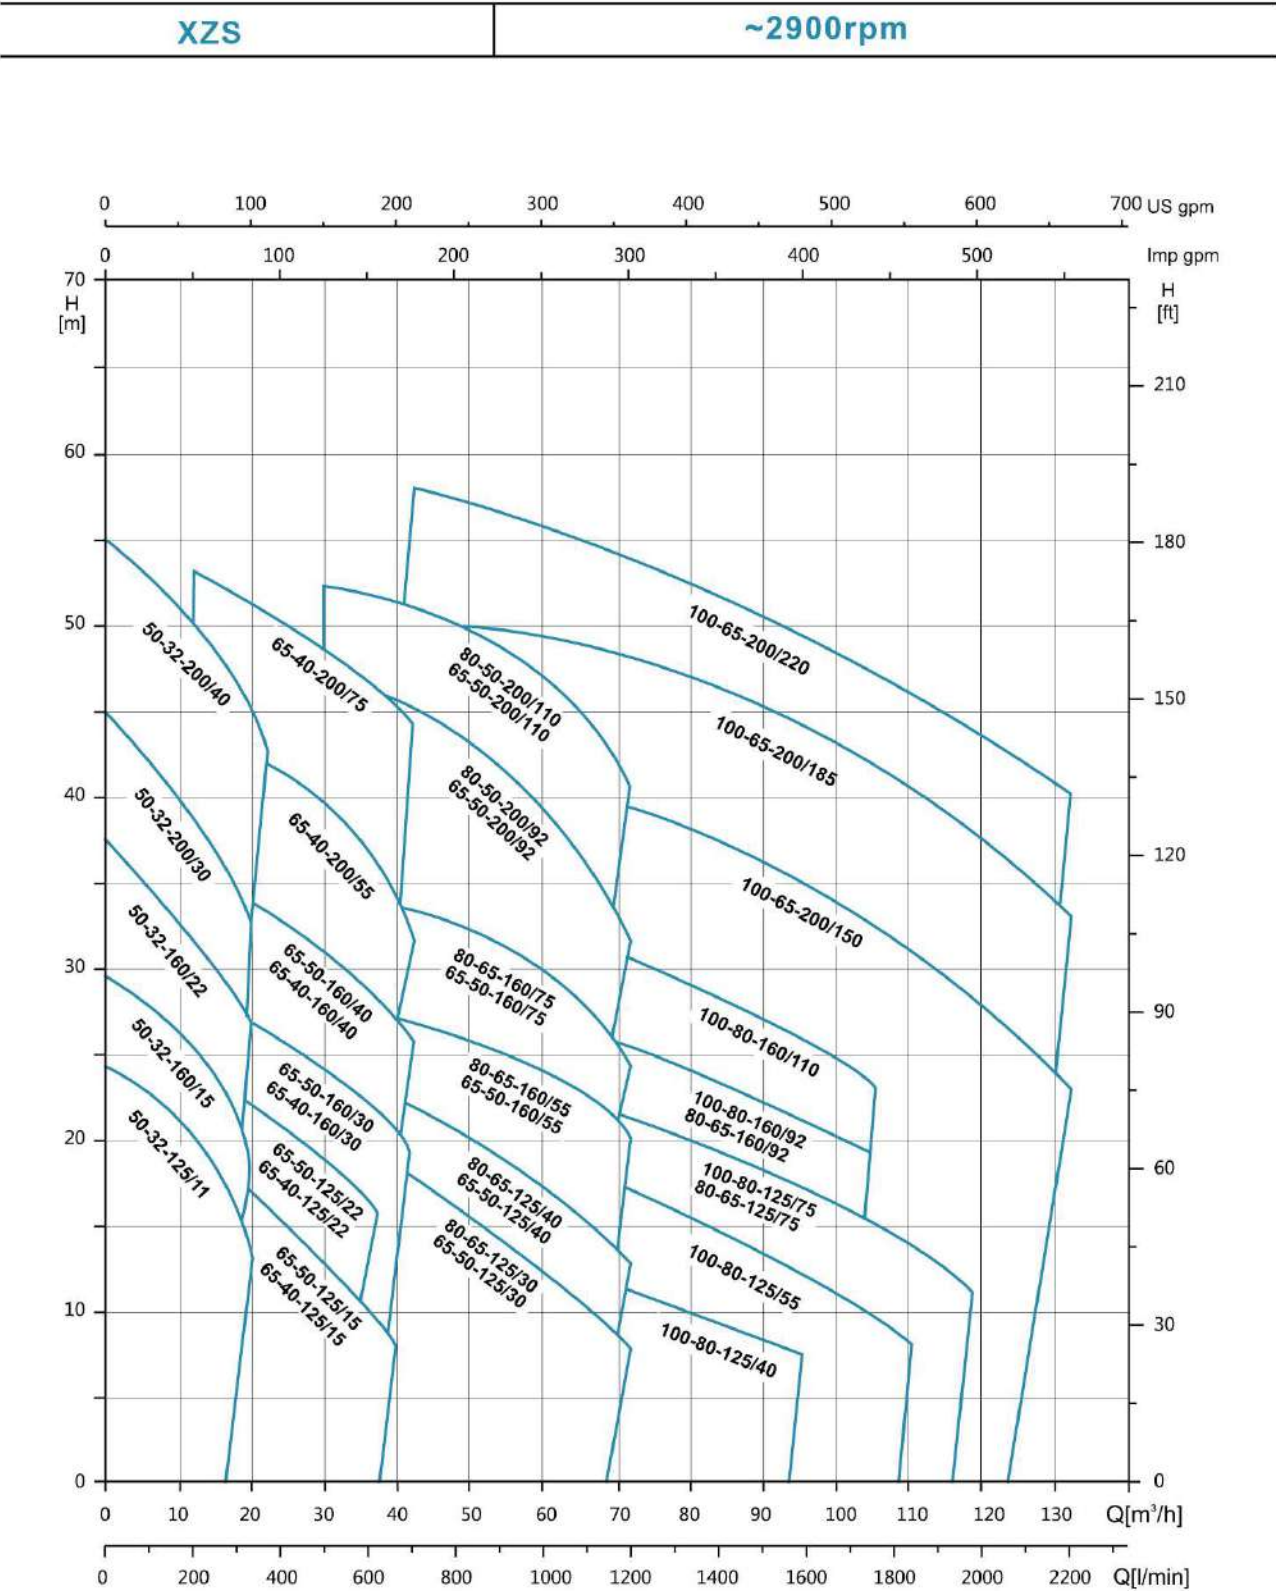

Hydraulic Performance Curves


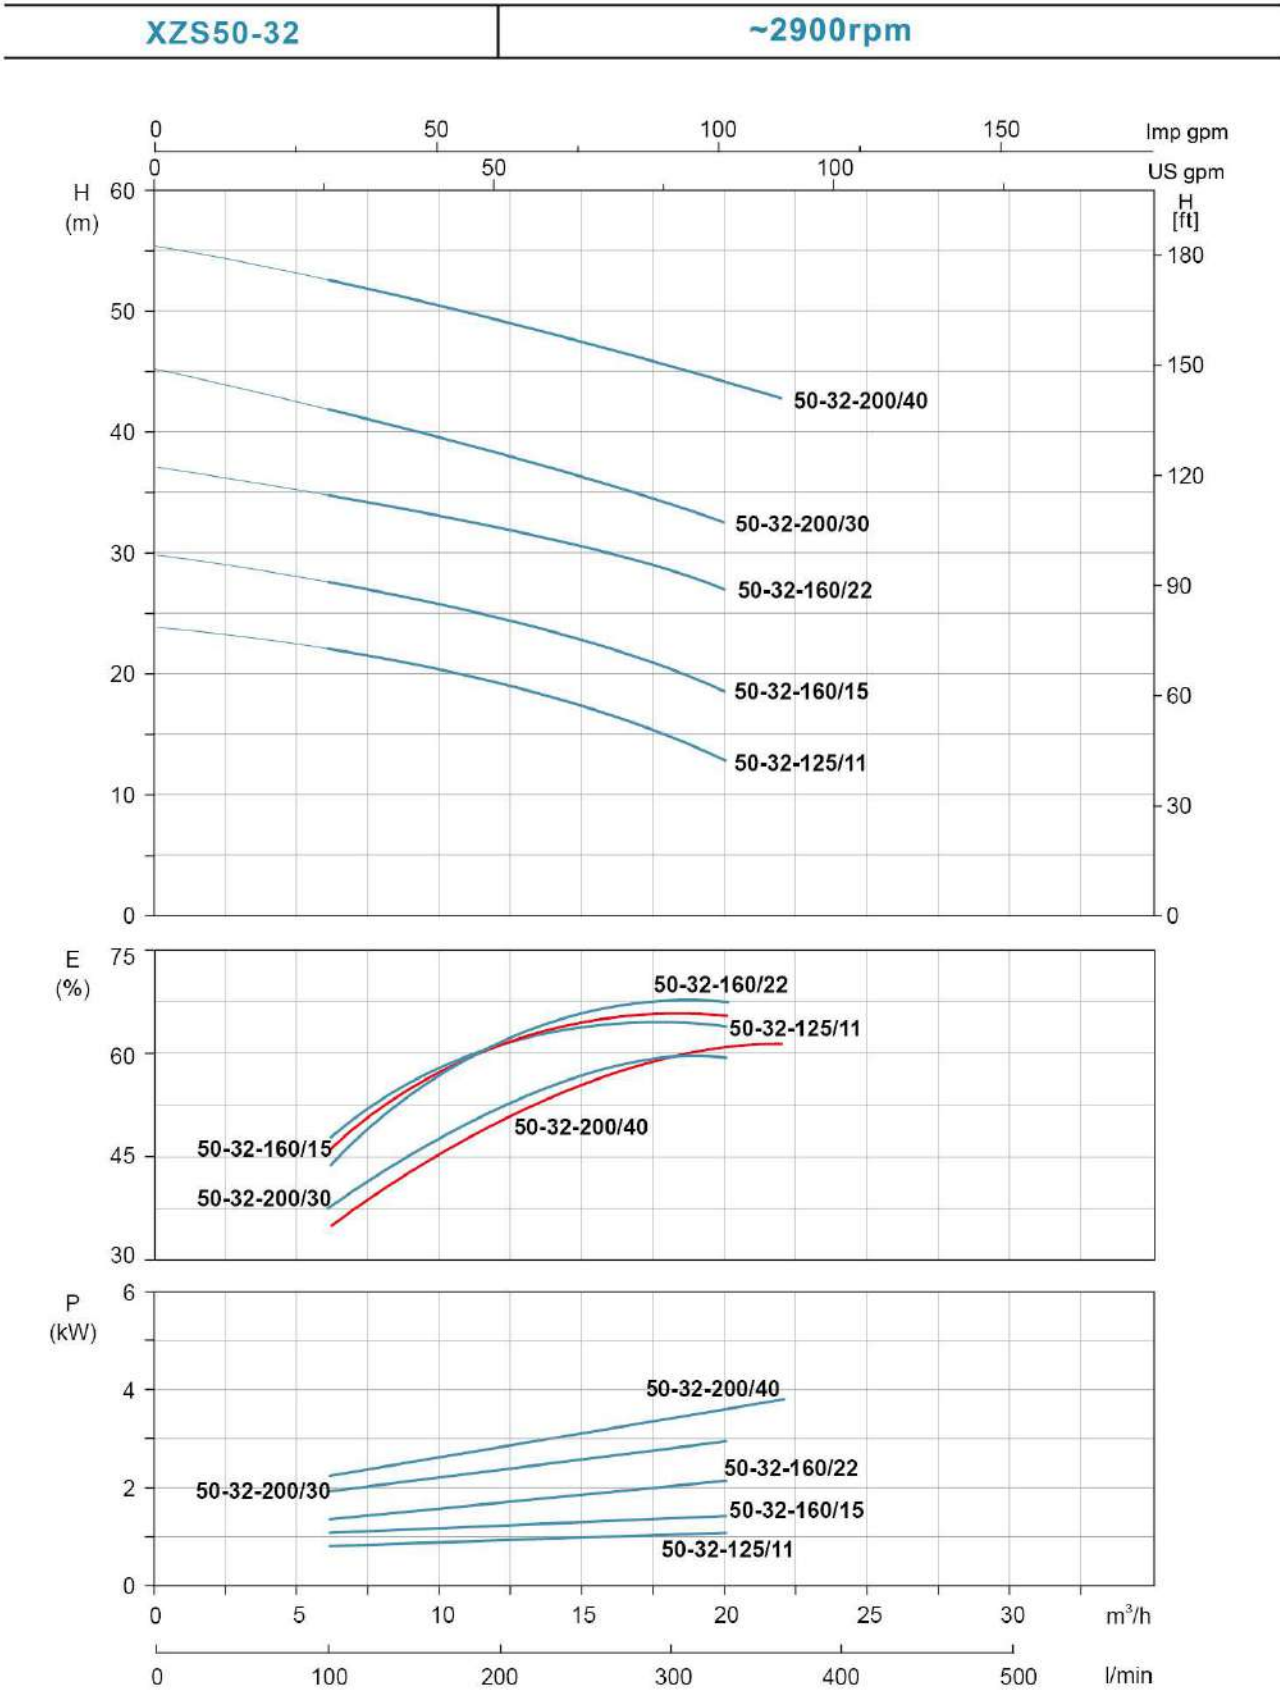


Hydraulic Performance Curves

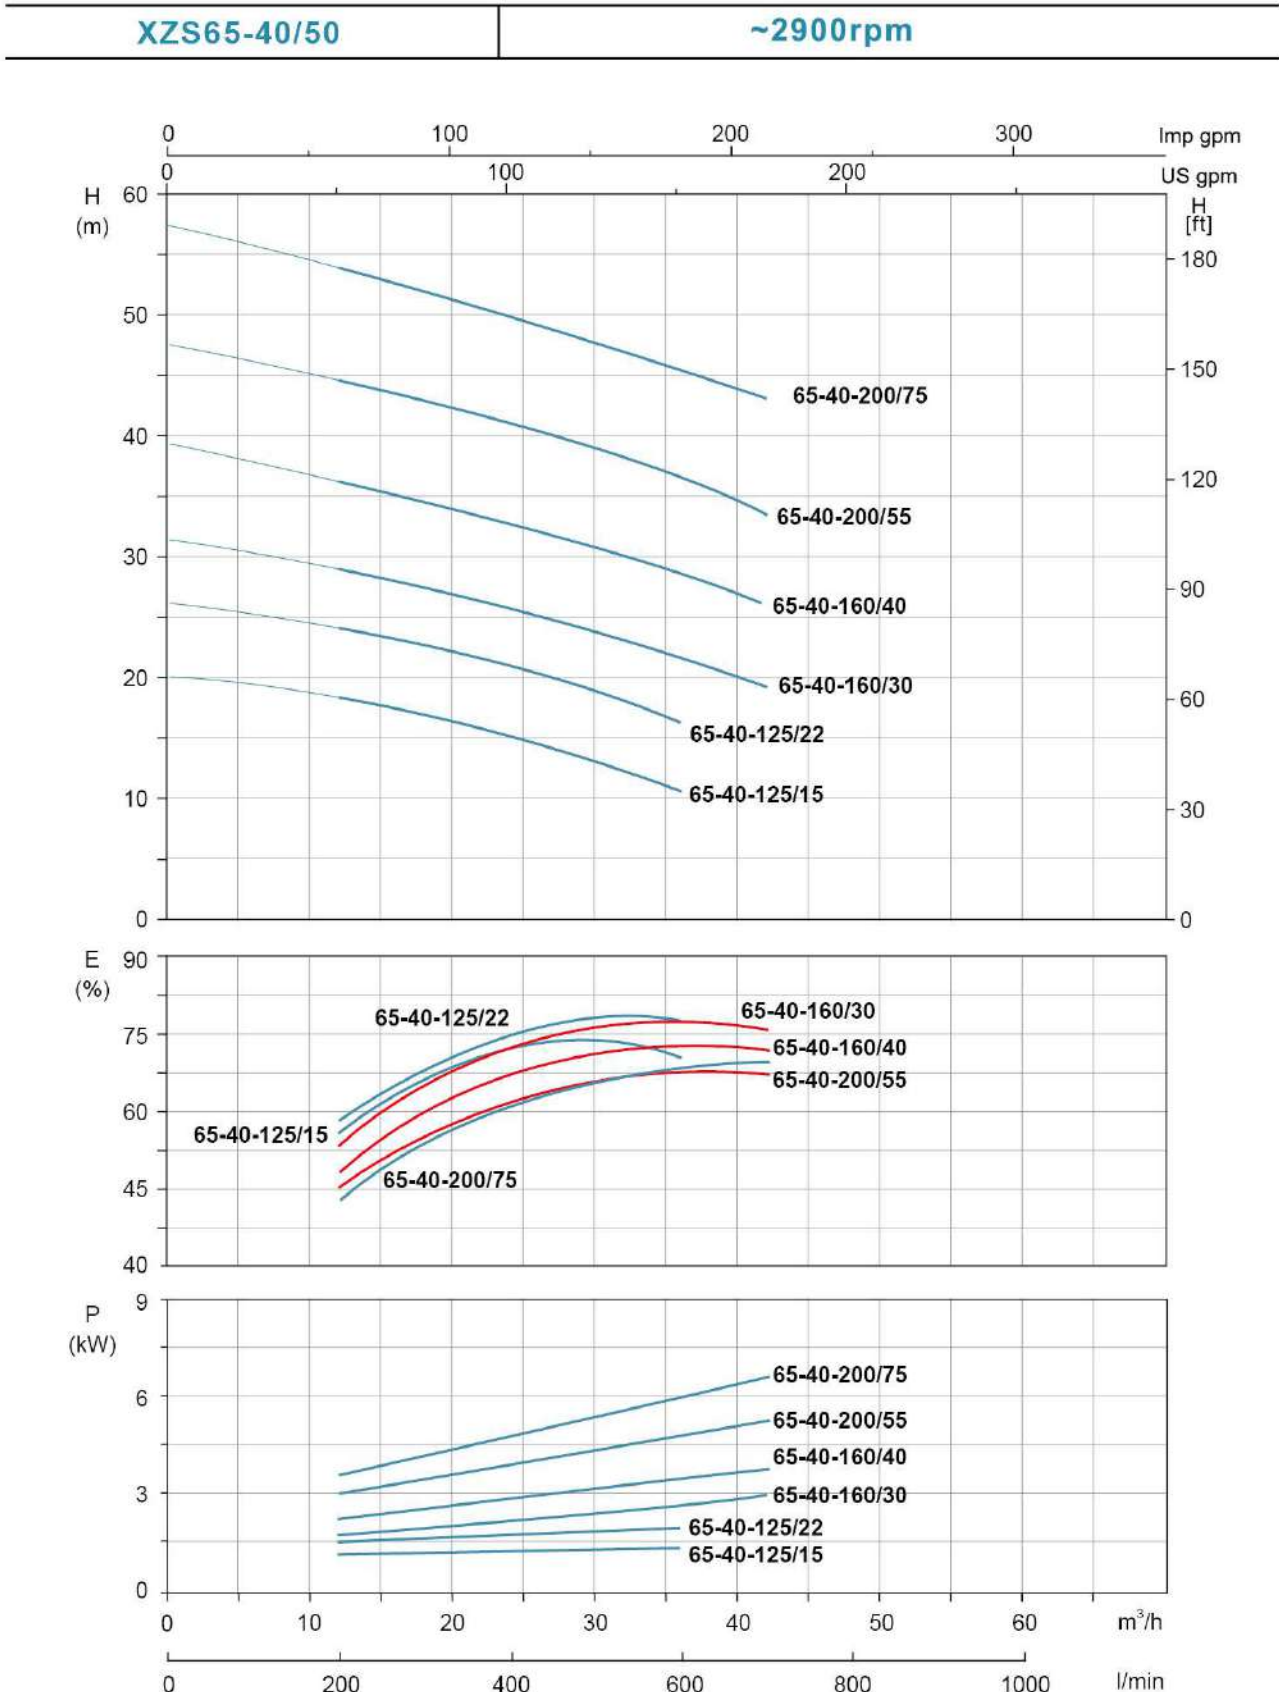


Hydraulic Performance Curves


Hydraulic Performance Curves

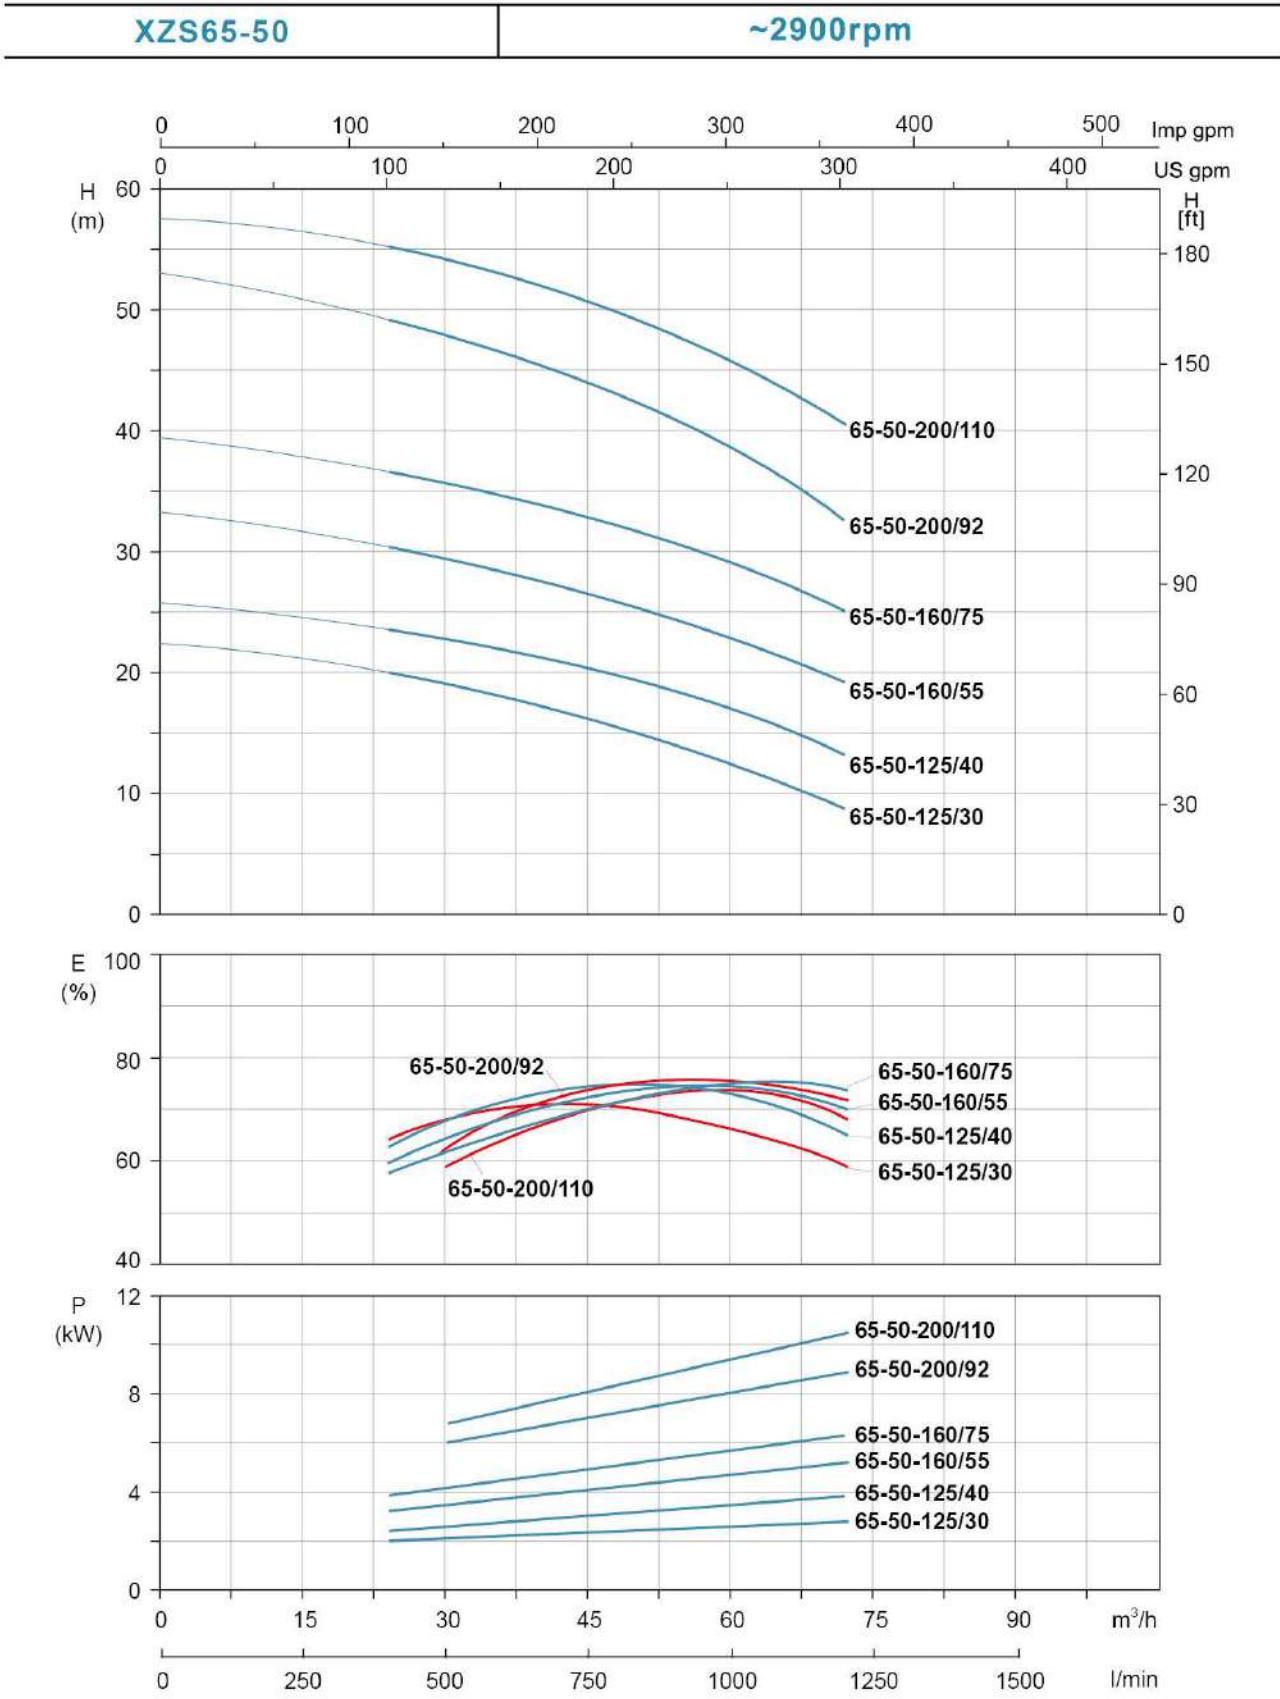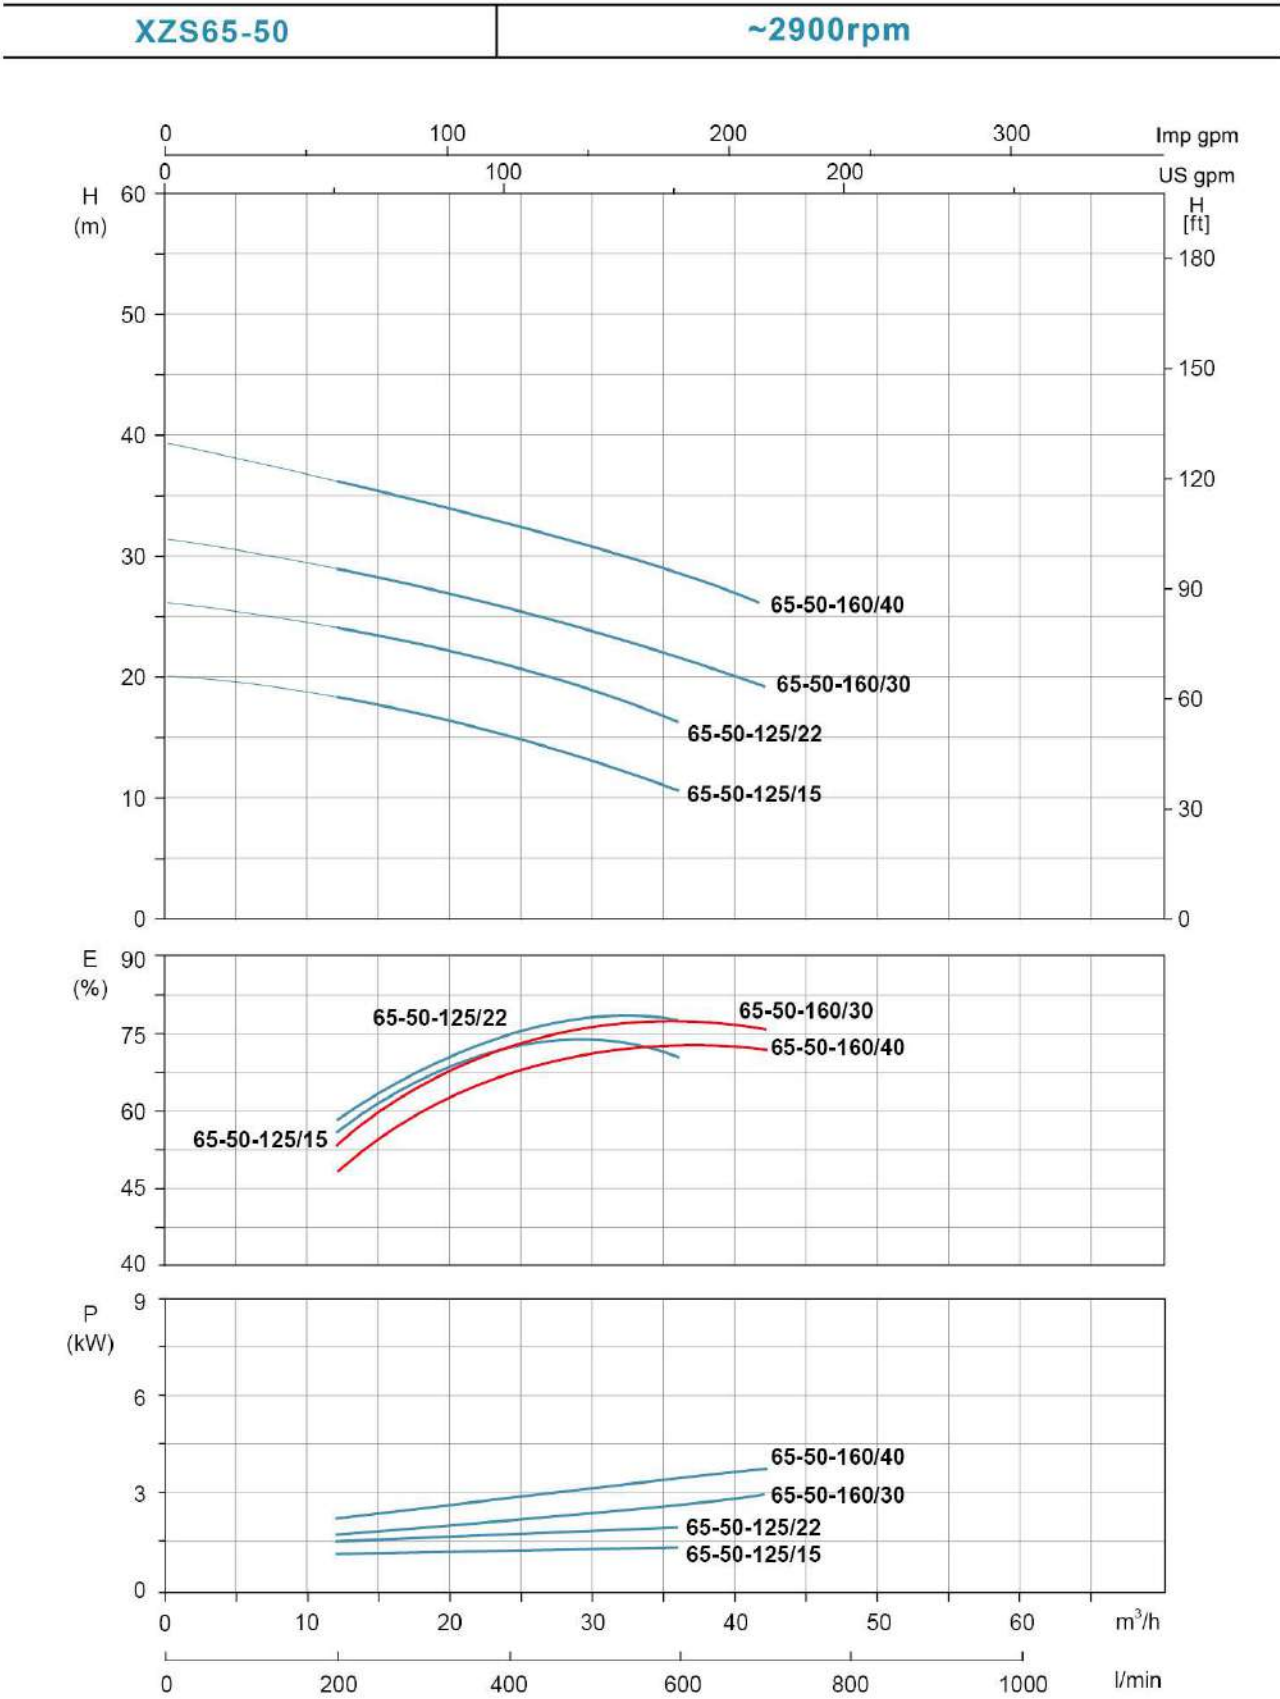


Hydraulic Performance Curves

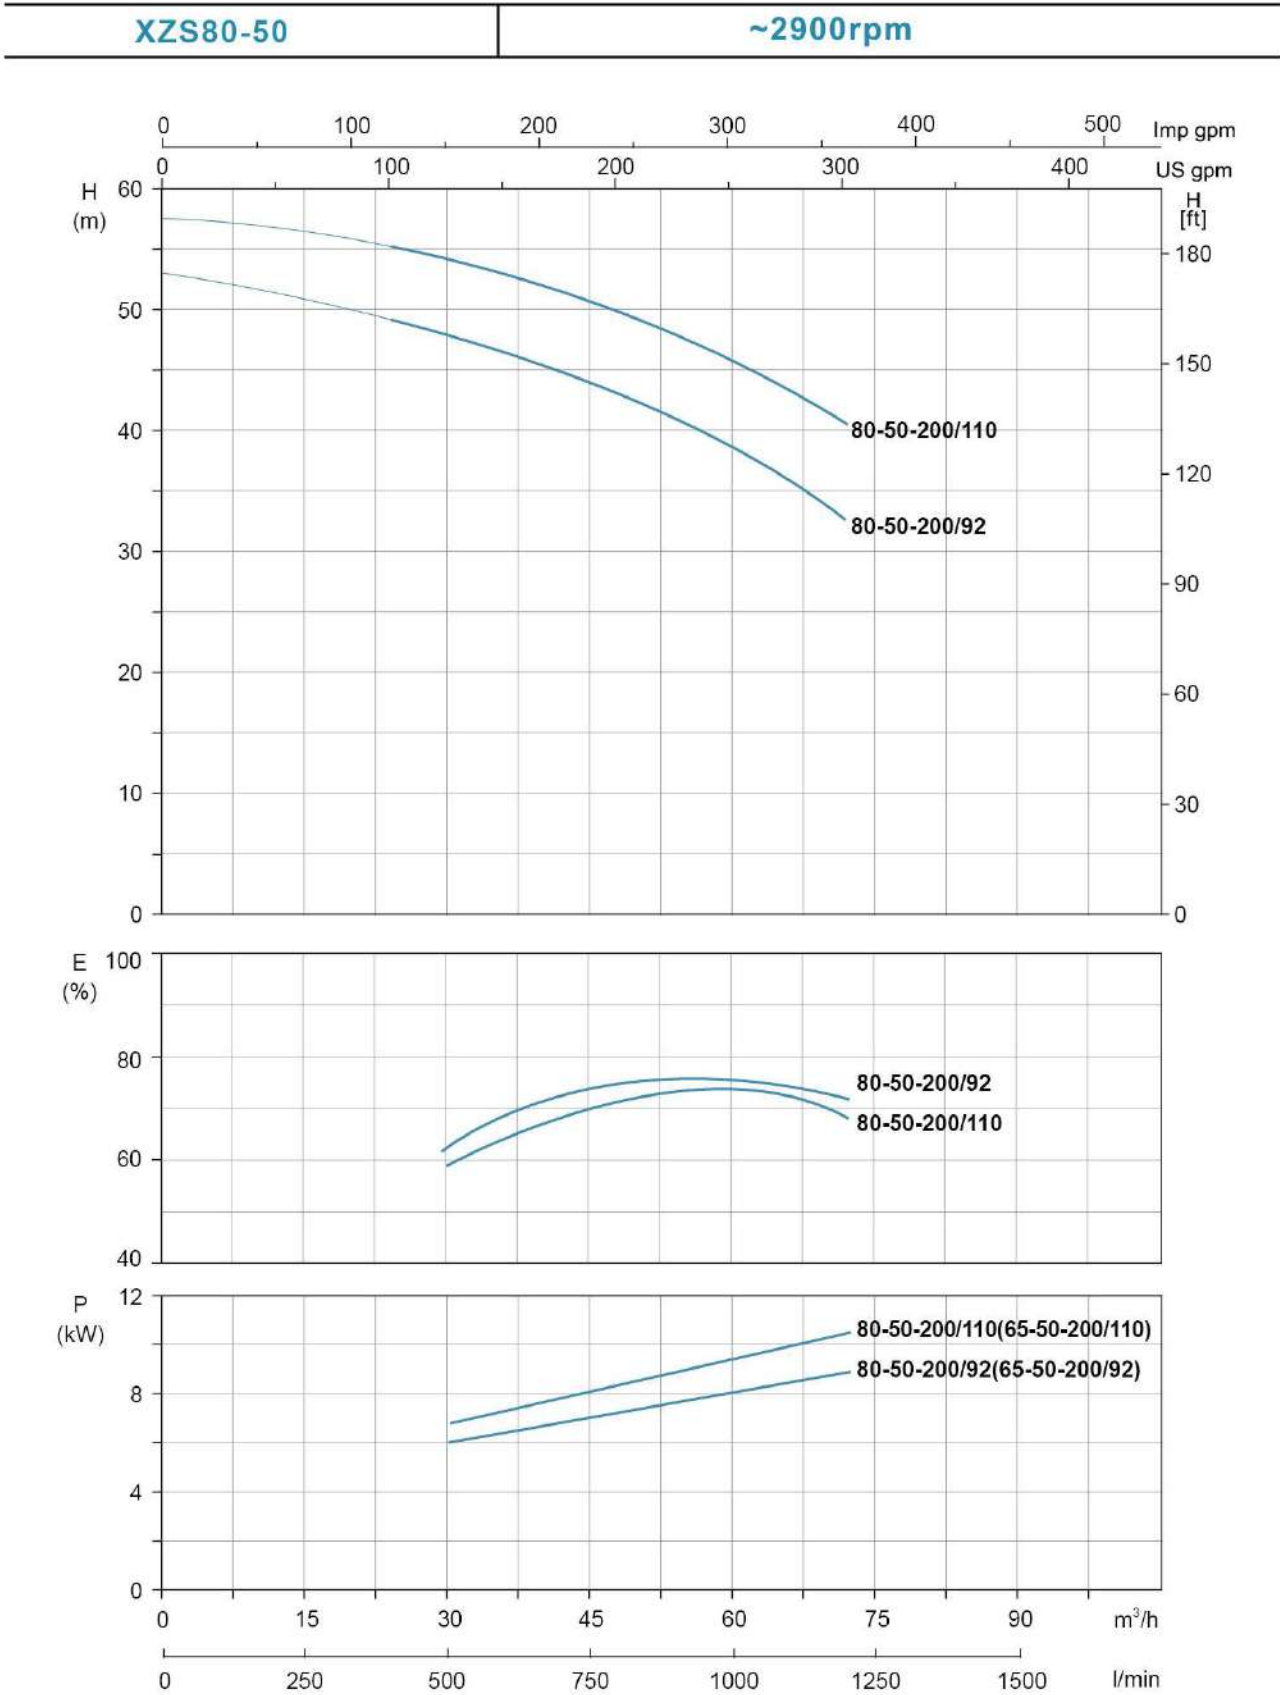


Hydraulic Performance Curves

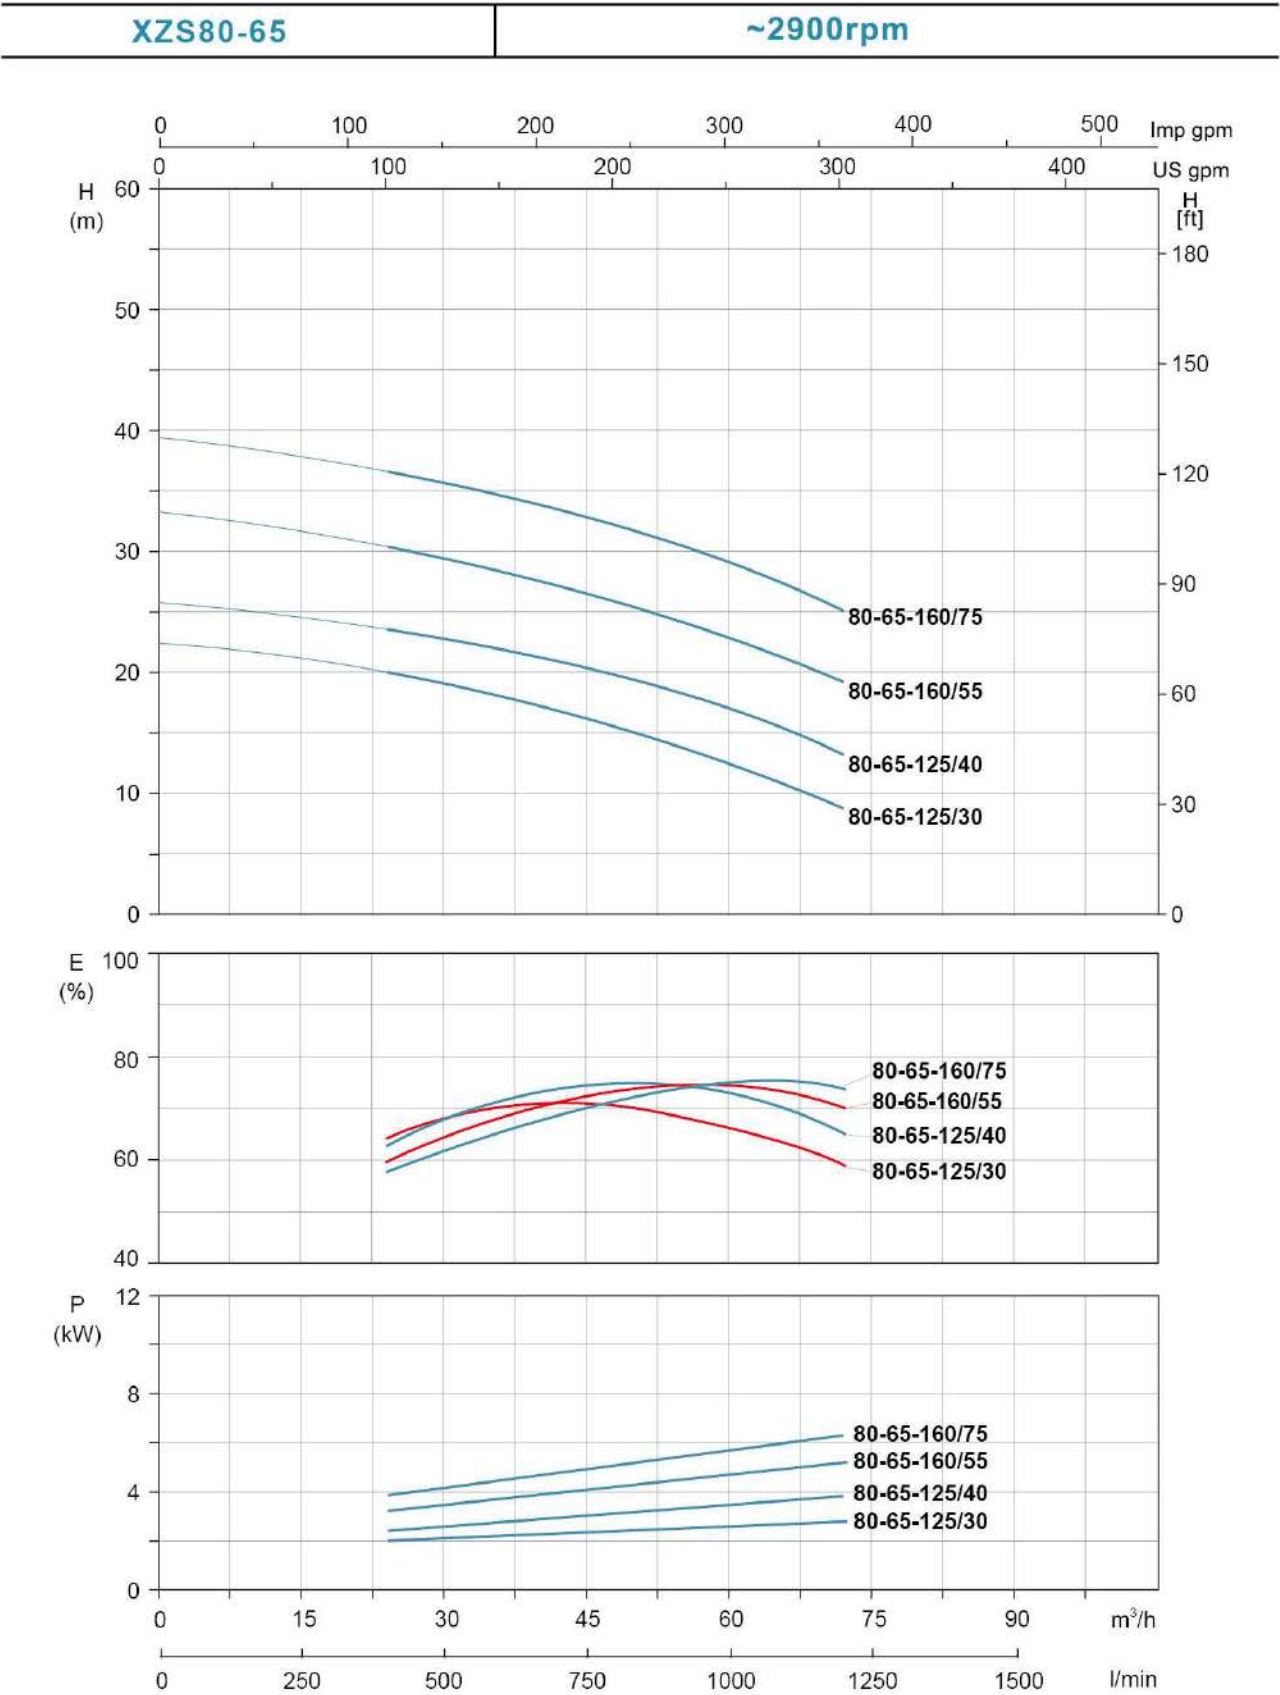


Hydraulic Performance Curves

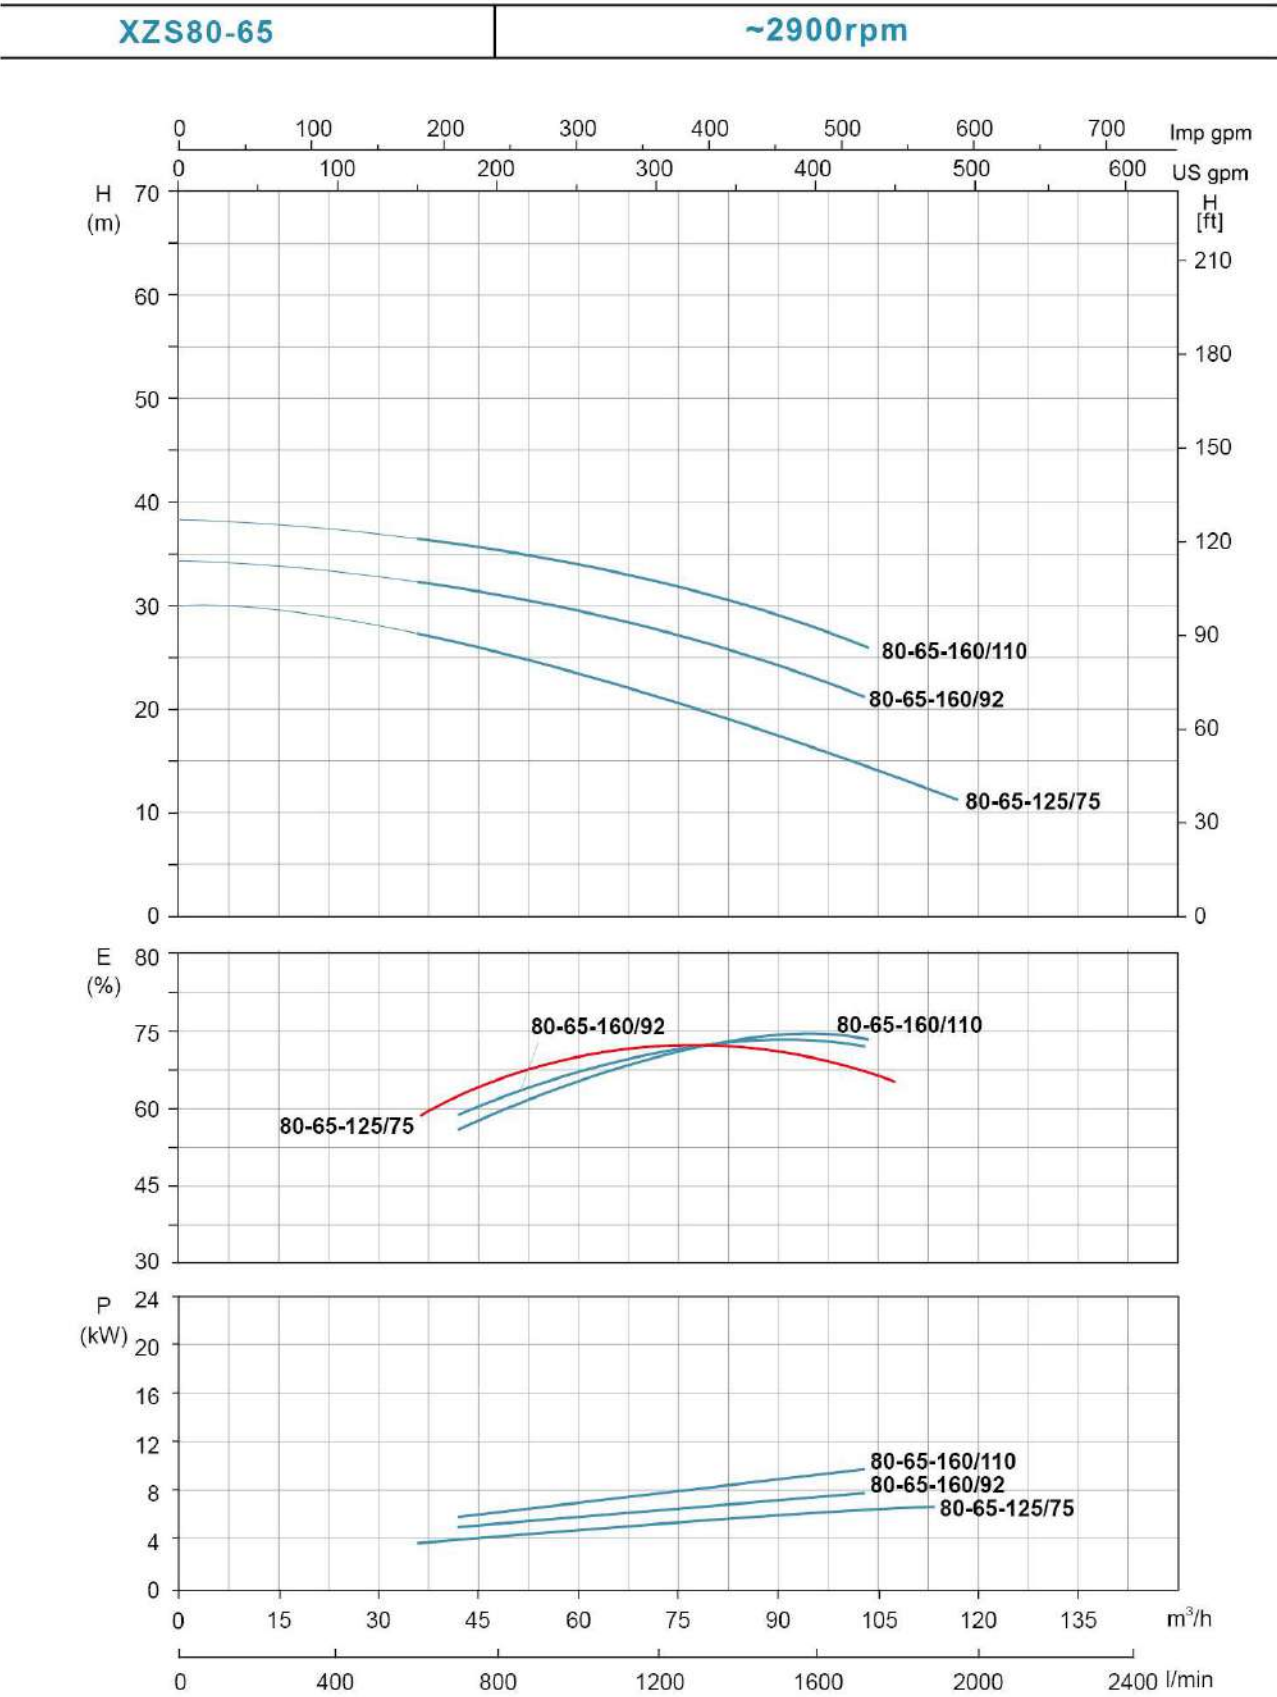

Hydraulic Performance Curves

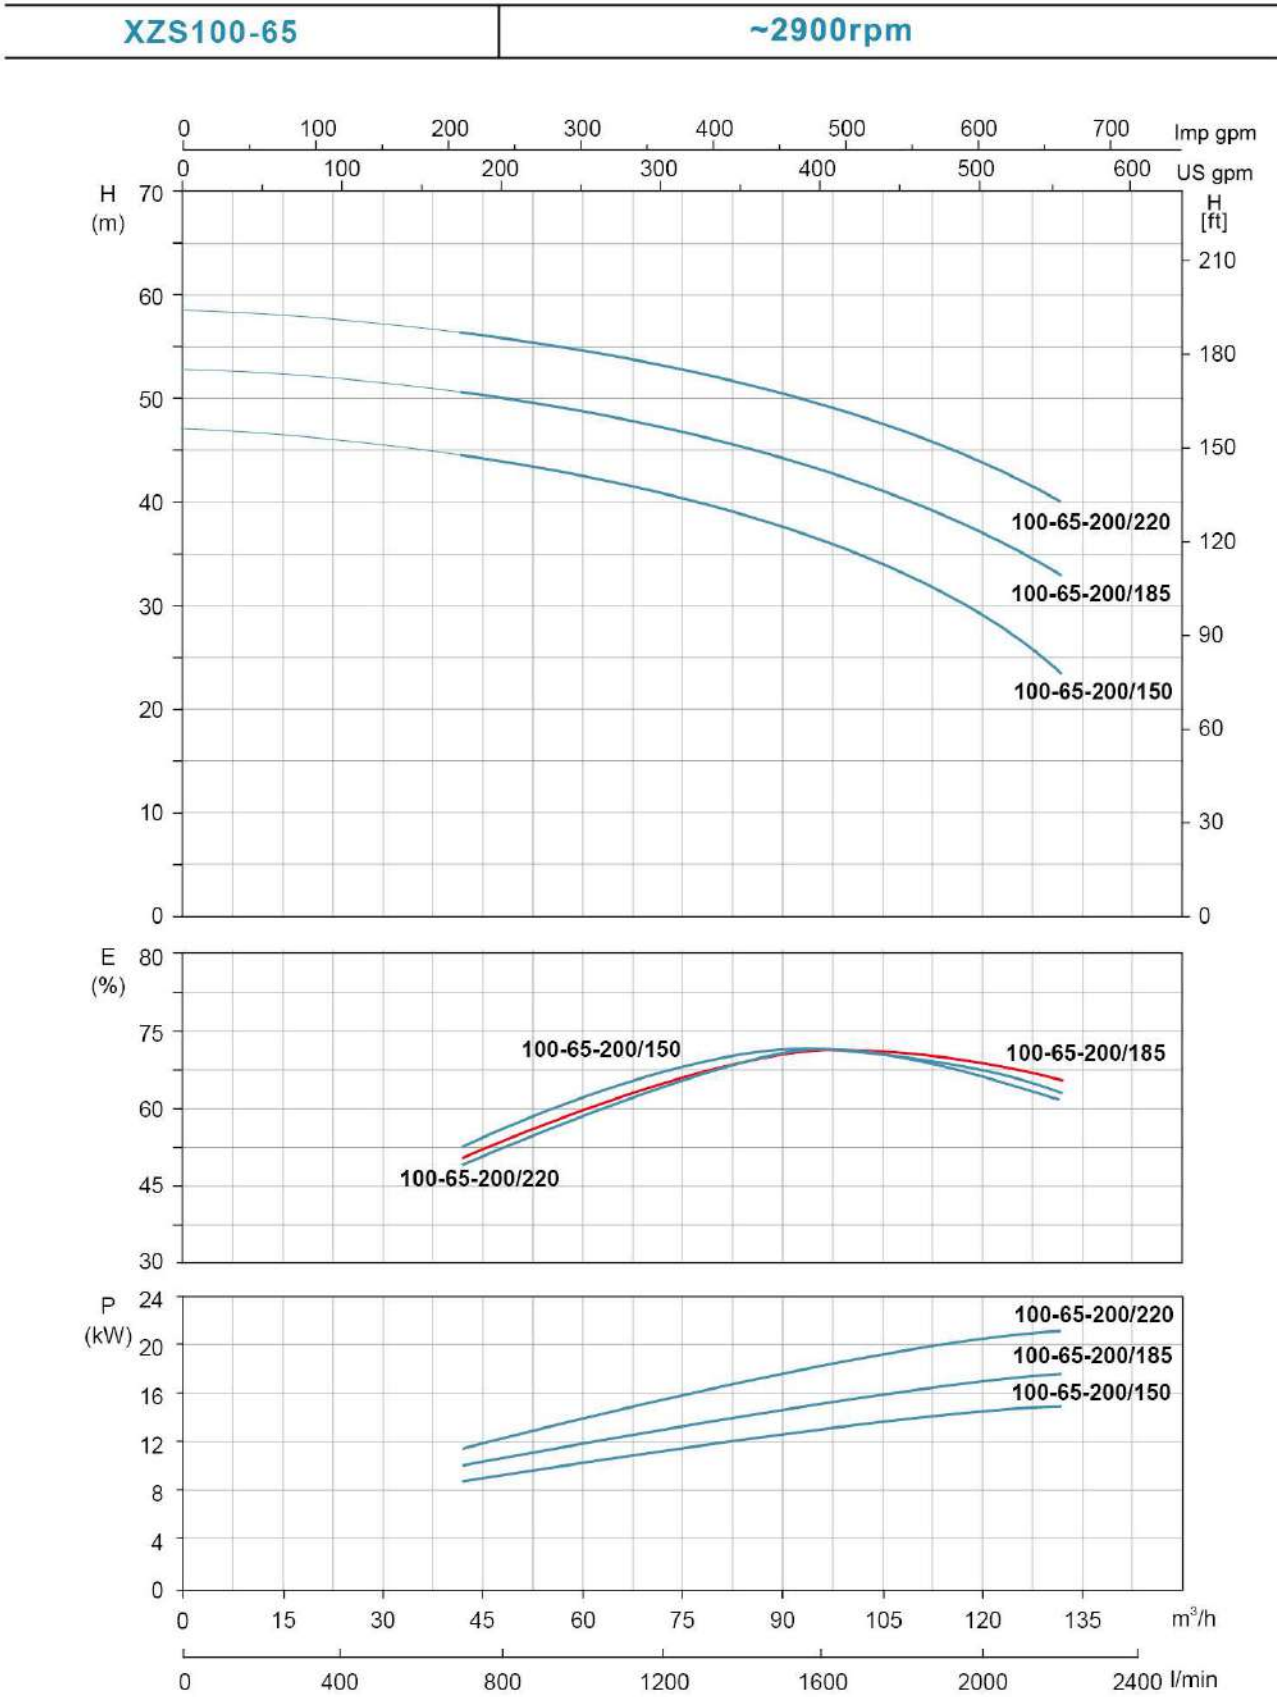


Hydraulic Performance Curves

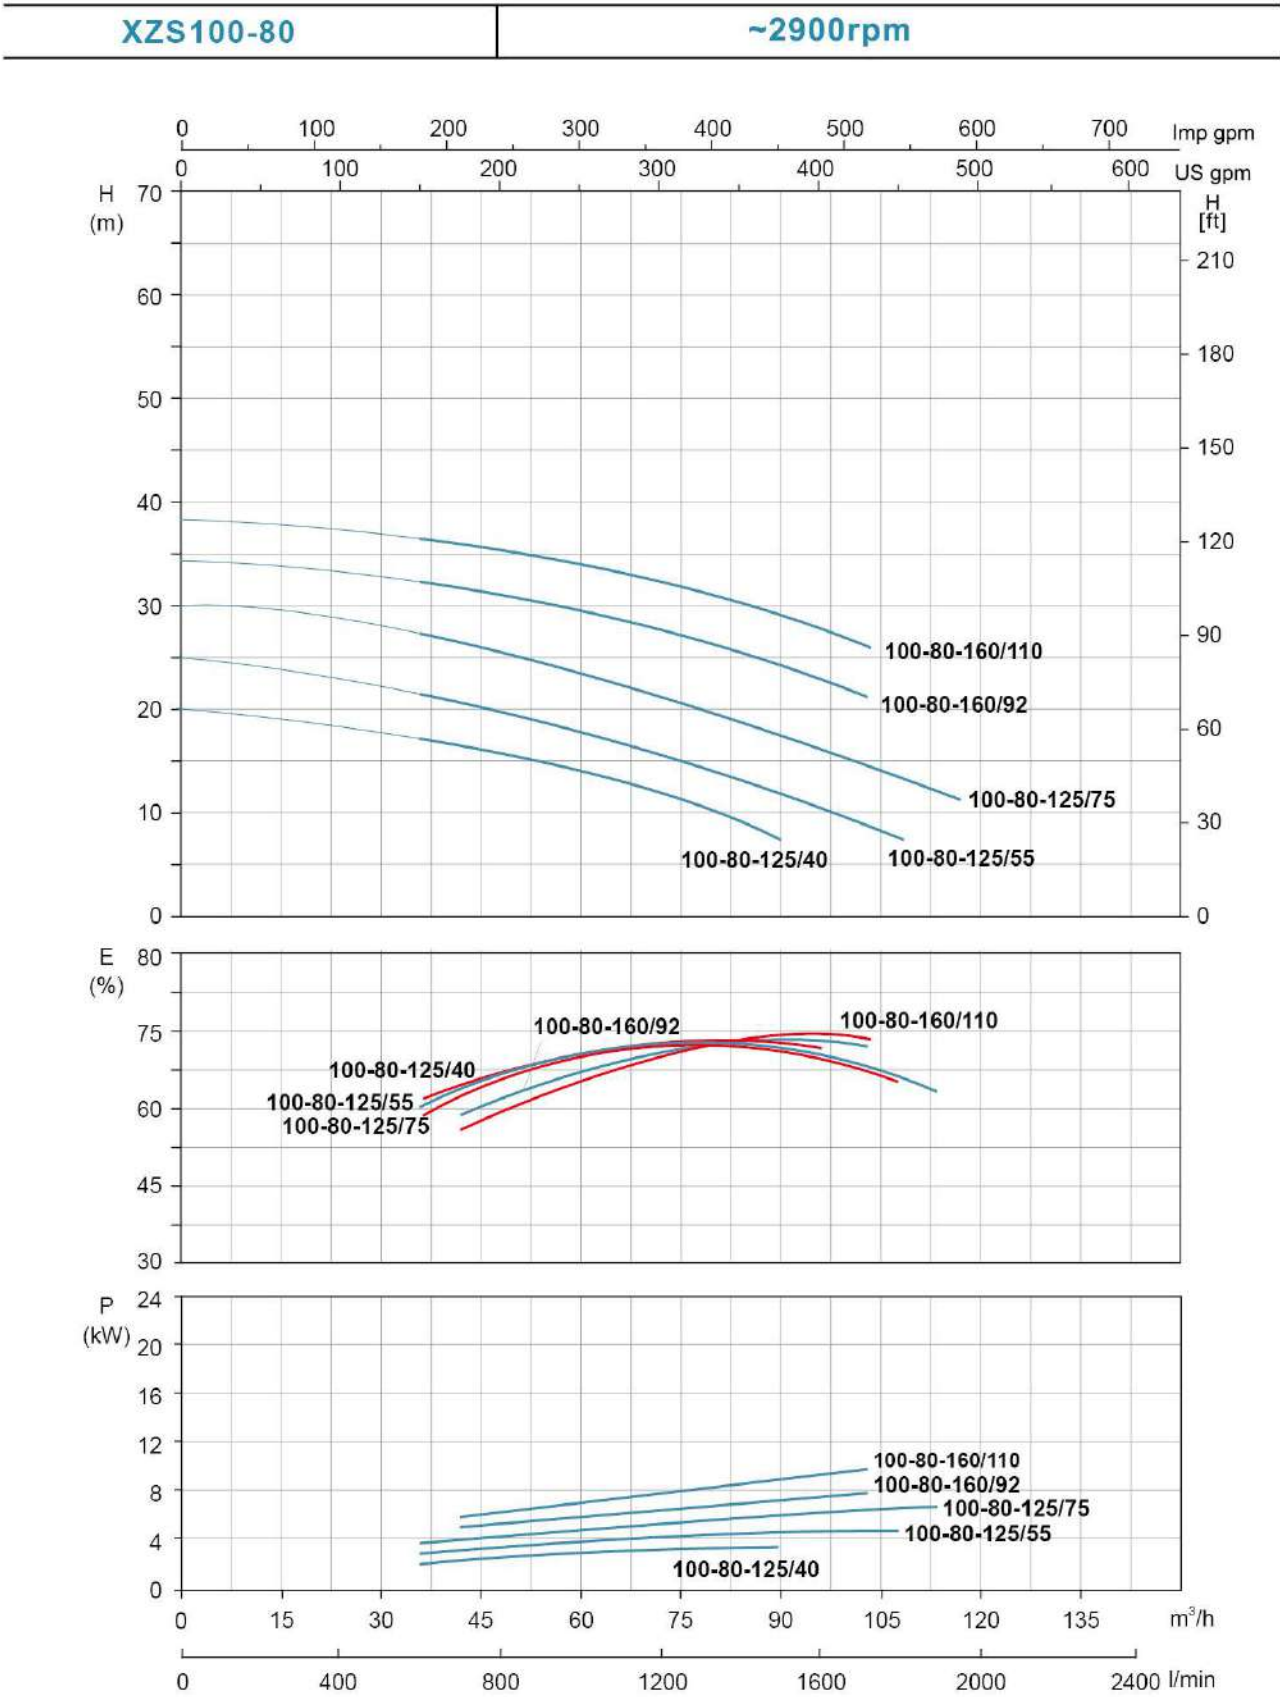

Installation Sketch


For model ≤ 7.5kw

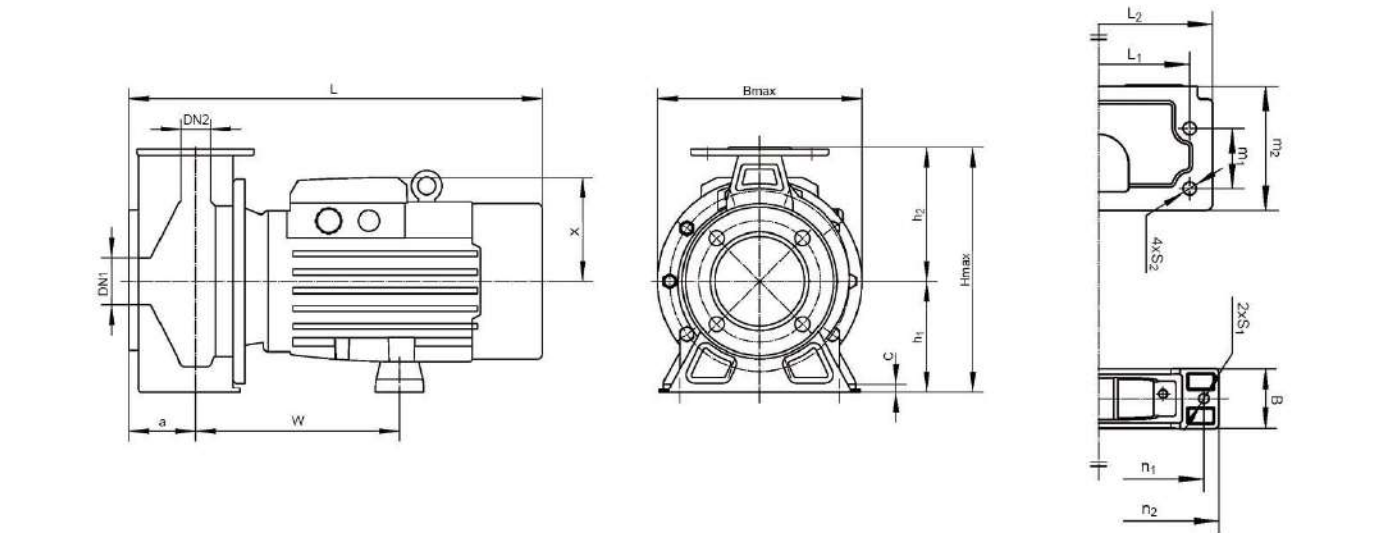

Model	DN1	DN2	a	w	L1	L2	m1	m2	n1	n2	h1	h2	2-S1	4-S2	B	C	X	Bmax	Hmax	L
XZS50-32-125/11	50	32	80	205	140	190	70	122	205	240	112	140	2-Ø12	4-Ø15	65	12	127	240	250	475
XZS50-32-160/15	50	32	80	207	190	240	70	122	205	240	132	160	2-Ø12	4-Ø15	65	12	127	244	292	477
XZS50-32-160/22	50	32	80	207	190	240	70	122	205	240	132	160	2-Ø12	4-Ø15	65	12	127	244	292	477
XZS50-32-200/30	50	32	80	244	190	240	70	124	225	260	160	180	2-Ø12	4-Ø15	75	15	124	295	340	492
XZS50-32-200/40	50	32	80	244	190	240	70	124	225	260	160	180	2-Ø12	4-Ø15	75	15	124	295	340	492
XZS65-50-125/15	65	50	80	205	160	210	70	121	205	240	112	140	2-Ø12	4-Ø15	65	12	127	240	252	475
XZS65-50-125/22	65	50	80	205	160	210	70	121	205	240	112	140	2-Ø12	4-Ø15	65	12	127	240	252	475
XZS65-50-160/30	65	50	80	244	190	240	70	123	225	260	132	160	2-Ø12	4-Ø15	75	15	124	260	292	492
XZS65-50-160/40	65	50	80	244	190	240	70	123	225	260	132	160	2-Ø12	4-Ø15	75	15	124	260	292	492
XZS65-40-200/55	65	40	40	246	212	265	70	146	245	280	160	180	2-Ø12	4-Ø15	70	15	142	295	340	563
XZS65-40-200/75	65	40	40	246	212	265	70	146	245	280	160	180	2-Ø12	4-Ø15	70	15	142	295	340	563
XZS80-65-125/30	80	65	65	254	190	240	70	158	225	260	132	160	2-Ø12	4-Ø15	75	15	124	260	292	522
XZS80-65-125/40	80	65	65	254	190	240	70	158	225	260	132	160	2-Ø12	4-Ø15	75	15	124	260	292	522
XZS80-65-160/55	80	65	65	256	212	265	70	150	245	280	160	180	2-Ø12	4-Ø15	70	15	142	280	340	573
XZS80-65-160/75	80	65	65	256	212	265	70	150	245	280	160	180	2-Ø12	4-Ø15	70	15	142	280	340	573
XZS100-80-125/40	100	80	80	256	212	280	95	155	225	260	160	180	2-Ø12	4-Ø15	75	15	124	280	340	524
XZS100-80-125/55	100	80	80	258	212	280	95	155	245	280	160	180	2-Ø12	4-Ø15	70	15	142	280	340	575
XZS100-80-125/75	100	80	80	258	212	280	95	155	245	280	160	180	2-Ø12	4-Ø15	70	15	142	280	340	575
XZS65-40-125/15	65	40	80	205	160	210	70	121	205	240	112	140	2-Ø12	4-Ø15	65	12	127	240	252	475
XZS65-40-125/22	65	40	80	205	160	210	70	121	205	240	112	140	2-Ø12	4-Ø15	65	12	127	240	252	475
XZS65-40-160/30	65	40	80	244	190	240	70	123	225	260	132	160	2-Ø12	4-Ø15	75	15	124	260	292	492
XZS65-40-160/40	65	40	80	244	190	240	70	123	225	260	132	160	2-Ø12	4-Ø15	75	15	124	260	292	492
XZS65-50-125/30	65	50	100	254	190	240	70	158	225	260	132	160	2-Ø12	4-Ø15	75	15	124	260	292	522
XZS65-50-125/40	65	50	100	254	190	240	70	158	225	260	132	160	2-Ø12	4-Ø15	75	15	124	260	292	522
XZS65-50-160/55	65	50	100	256	212	265	70	150	245	280	160	180	2-Ø12	4-Ø15	70	15	142	280	340	573
XZS65-50-160/75	65	50	100	256	212	265	70	150	245	280	160	180	2-Ø12	4-Ø15	70	15	142	280	340	573
XZS80-65-125/75	80	65	100	258	212	280	95	155	245	280	160	180	2-Ø12	4-Ø15	70	15	142	280	340	575


Installation Sketch

For model $\geq 9.2\text{kw}$

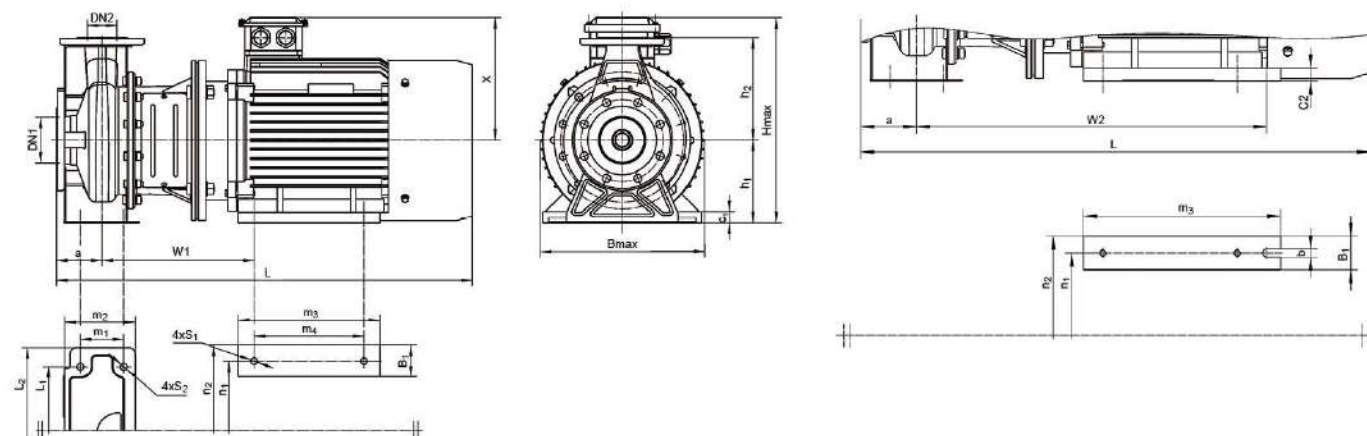


Model	DN1	DN2	a	w1	w2	L1	L2	m1	m2	m3	m4	n1	n2	h1	h2	4-S1	4-S2	B1	b	c1	c2	X	Bmax	Hmax	L
XZS80-50-200/92	80	50	100	314	-	212	265	70	146	210	260	254	320	160	200	4-Φ14.5	4-Φ14	65	-	20	-	260	350	420	816
XZS80-50-200/110	80	50	100	314	-	212	265	70	146	210	260	254	320	160	200	4-Φ14.5	4-Φ14	65	-	20	-	260	350	420	816
XZS100-80-160/92	100	80	100	321	-	212	280	95	155	260	210	254	320	160	200	4-Φ14.5	4-Φ14	65	-	20	-	260	350	420	823
XZS100-80-160/110	100	80	100	321	-	212	280	95	155	260	210	254	320	160	200	4-Φ14.5	4-Φ14	65	-	20	-	260	350	420	823
XZS100-65-200/150	100	65	100	-	581	250	320	95	155	310	-	254	314	180	225	-	4-Φ14	60	14.5	-	20	260	350	440	823
XZS100-65-200/185	100	65	100	-	625	250	320	95	155	354	-	254	314	180	225	-	4-Φ14	60	14.5	-	20	260	350	440	868
XZS100-65-200/220	100	65	100	334	-	250	320	95	155	311	241	279	355	180	225	4-Φ14.5	4-Φ14	70	-	22	-	280	355	460	913
XZS65-50-200/92	65	50	100	314	-	212	265	70	146	210	260	254	320	160	200	4-Φ14.5	4-Φ15	65	-	-	-	260	350	420	816
XZS65-50-200/110	65	50	100	314	-	212	265	70	146	210	260	254	320	160	200	4-Φ14.5	4-Φ15	65	-	-	-	260	350	420	816
XZS80-65-160/92	80	65	100	321	-	212	280	95	155	260	210	254	320	160	200	4-Φ14.5	4-Φ15	65	-	-	-	260	350	420	823
XZS80-65-160/110	80	65	100	321	-	212	280	95	155	260	210	254	320	160	200	4-Φ14.5	4-Φ15	65	-	-	-	260	350	420	823

Flange Dimensions



PN16 FLANGES

DN	D	M	G	Holes		Max. Thickness
				N°	Ø	
Ø32	140	100	76	4	18	14
Ø40	150	110	84	4	18	14.5
Ø50	165	125	99	4	18	15
Ø65	185	145	118	4	18	16
Ø80	200	160	132	4	18	18



PN16 FLANGES

DN	D	M	G	Holes		Max. Thickness
				N°	Ø	
Ø100	220	180	152	8	18	18

General

The series of intelligent pressure boosting system BWS-HY is developed based on PID control technology, to control the pump pressure within a certain range according to the water consumption with features of complete functions, reliable quality, stable operation and easy maintenance.

About BWS

BWS, the abbreviation of Building Water System or Best Water System, implies the LEO's ambition to build up the image of best quality product range for water supply system in the market.

BWS series includes WG Non-negative Water Supply System, WX Water Non-negative Supply System, HY Constant Water Supply System and ZY Boosting Water Supply System. Together with WQ sewage pumps, XBD firefighting pumps, LPP in-line pumps and LEN end suction pumps, we have full range to satisfy the applications of secondary water supply, drainage, fire-fighting and HVAC.

Product Composition

The complete device is composed from a pump unit, a pressure tank, a pressure sensor, PID and accessories. If necessary, auxiliary pumps or pressure tanks can be added in the device.



BWS-HY(E)



BWS-HY

Identification Codes

BWS - HY (E) 2LVS15-8 / LVS3-10

