

SPECIFICATION

50Hz

Rev. A

PUMP		
Liquid Handled	Type of liquid	Clean water
	Temperature [°C]	min. -10 max +110
	Viscosity [cSt]	max 38
Maximum ambient temperature [°C]		40 (over ask for details)
Maximum working pressure [MPa]		1.0
Construction	Impeller	Closed centrifugal type
	Shaft seal type	Mechanical seal
	Bearing	On the motor
Pipe Connection	Suction	PN10 (LPC4 32-100 – LPC4 40-100) DIN 2501 UNI 2223-29 PN16 all other models DIN 2501
	Discharge	PN10 (LPC 32-100 – LPC 40-100) DIN 2501 UNI 2223-29 PN16 all other models DIN 2501
Material	Casing	CAST IRON
	Impeller	CAST IRON
	Casing cover	CAST IRON
	Shaft seal	Carbon/SiC/EPDM
	Shaft	AISI 420
	Bracket	CAST IRON
Applicable standard of test		ISO 9906 – Annex A

MOTOR	
Type	Electric - TEFC
	Three Phase
Efficiency level (Reg. 640/2009)	- from 0.37 kW up to 0.55 kW IE2 from 0.75 kW up to 5.5 kW IE3 from 7.5 kW up to 15 kW
No. of Poles	4
Rotation speed [min ⁻¹]	≈1400
Insulation Class	F
Protection degree (CEI EN 60034-5)	IP 55
Power rating [kW]	0.25 ÷ 15
[HP]	0.33 ÷ 20
Frequency [Hz]	50
Voltage [V]	230/400 ±10% (up to 4 kW) 400/690 ±10% (5.5kW and above)
Over load protection	Provided by the user
Casing material	Aluminium

LPC 4 Poles

SELECTION CHART


Rev. A

Pump type LPC4	Power		Capacity																				
	[kW]	[HP]	l/min	0	30	40	50	75	85	100	125	150	166,7	175	200	225	250	300	350	400	416,7	450	500
			m³/h	0	1,8	2,4	3	4,5	5,1	6	7,5	9	10	10,5	12	13,5	15	18	21	24	25	27	30
Three Phase	[kW]	[HP]	H=Total manometric head in meters																				
LPC4 32-100/0,25	0,25	0,33	3,4	3,3	3,2	3,1	2,7	2,5	2,1	1,2	-	-	-	-	-	-	-	-	-	-	-	-	-
LPC4 40-100/0,25	0,25	0,33	3,7	-	3,6	3,6	3,5	3,4	3,3	2,9	2,5	2,2	2	1,5	-	-	-	-	-	-	-	-	-
LPC4 40-125/0,25R	0,25	0,33	4,8	-	4,5	4,4	4,1	3,9	3,7	3	2,2	-	-	-	-	-	-	-	-	-	-	-	-
LPC4 40-125/0,25	0,25	0,33	6,3	-	-	6,2	6	5,9	5,7	5,2	4,5	4,1	3,9	2,8	-	-	-	-	-	-	-	-	-
LPC4 40-160/0,37	0,37	0,55	9,6	-	-	9,4	9,2	9,1	8,9	8,4	7,7	7,4	6,9	5,8	4,7	-	-	-	-	-	-	-	-
LPC4 40-200/0,75	0,75	1	13,5	-	-	-	12,8	12,6	12,4	11,9	11,3	11	10,6	9,8	9	8	6	-	-	-	-	-	-
LPC4 40-200/1,1	1,1	1,5	15	-	-	-	14,6	14,5	14,3	13,8	13,3	13,0	12,7	11,8	10,9	10	8	-	-	-	-	-	-
LPC4 40-250/1,1	1,1	1,5	19	-	-	-	-	18,5	18	17,5	17	16,3	16	14,5	13	11	-	-	-	-	-	-	-
LPC4 40-250/1,5	1,5	2	22,8	-	-	-	-	-	21,5	21	20,5	19,7	19,5	18	16,5	15	-	-	-	-	-	-	-
LPC4 50-125/0,25	0,25	0,3	4,8	-	-	-	-	-	4,6	4,5	4,3	4,2	4,1	3,9	3,6	3,3	2,4	-	-	-	-	-	-
LPC4 50-125/0,37	0,37	0,55	6,4	-	-	-	-	-	6,3	6,2	6,1	6	6	5,8	5,6	5,3	4,6	3	-	-	-	-	-
LPC4 50-160/0,55	0,55	0,75	9,2	-	-	-	-	-	8,8	8,6	8,4	8,2	8,1	7,7	7,3	6,8	5,8	4,4	-	-	-	-	-
LPC4 50-200/1,1R	1,1	1,5	12,9	-	-	-	-	-	12,7	12,5	12,1	12	11,7	11,2	10,7	10,1	8,5	6,8	-	-	-	-	-
LPC4 50-200/1,1	1,1	1,5	14,5	-	-	-	-	-	14,2	14	13,8	13,7	13,4	13	12,5	11,8	10,2	8,3	6	-	-	-	-
LPC4 50-250/1,5	1,5	2,0	18,8	-	-	-	-	-	-	-	-	-	17,5	17,4	17	16,6	16,2	15	13,7	12	11	10	-
LPC4 50-250/2	2,2	3	23,2	-	-	-	-	-	-	-	-	-	21,8	21,7	21,4	21	20,5	19,5	18,5	17	15,4	14	11

Pump type LPC4	Power		Capacity																							
	[kW]	[HP]	l/min	0	150	166.7	175	200	225	250	300	350	400	416.7	450	500	600	700	750	800	900	1000	1100	1200	1300	1500
			m³/h	0	9	10	10.5	12	13.5	15	18	21	24	25	27	30	36	42	45	48	54	60	66	72	78	90
			H=Total manometric head in meters																							
Three Phase																										
LPC4 65-125/0,37	0.37	0.55	5.4	5.3	5.3	5.3	5.2	5.1	5	4.8	4.5	4.1	3.7	3.6	3.0	-	-	-	-	-	-	-	-	-	-	-
LPC4 65-125/0,55	0.55	0.75	6.5	6.4	6.4	6.3	6.2	6.1	6	5.8	5.5	5.2	5.1	4.9	4.4	-	-	-	-	-	-	-	-	-	-	-
LPC4 65-160/0,75	0.75	1	8.3	-	-	-	8.1	8.0	7.9	7.8	7.4	7	6.8	6.6	6	4	-	-	-	-	-	-	-	-	-	-
LPC4 65-160/1,1	1.1	1.5	9.1	-	-	-	9.0	8.9	8.8	8.7	8.4	8.1	7.9	7.7	7.2	5.5	-	-	-	-	-	-	-	-	-	-
LPC4 65-200/1,1	1.1	1.5	12.7	-	-	-	12.3	12.2	12	11.5	10.8	10	9.4	9	8	5.8	-	-	-	-	-	-	-	-	-	-
LPC4 65-200/1,5	1.5	2	14.3	-	-	-	14.1	14.1	14.4	13.6	13	12.1	11.9	11.2	10.1	7.8	5	-	-	-	-	-	-	-	-	-
LPC4 65-250/2,2	2.2	3	19.5	-	-	-	-	-	18	17.5	17	16.0	15.8	15.0	14	11.8	9.5	8.5	-	-	-	-	-	-	-	-
LPC4 65-250/3	3	4	22.8	-	-	-	-	-	22.3	22	21.5	21	20.8	20.2	19.4	17.3	14	12.5	10.6	-	-	-	-	-	-	-
LPC4 80-160/0,75	0.75	1	6.9	-	-	-	-	-	-	6.3	6.1	6	5.9	5.8	5.6	4.9	4	3.6	-	-	-	-	-	-	-	-
LPC4 80-160/1,1R	1.1	1.5	7.4	-	-	-	-	-	-	7.3	7.2	7.1	7.1	7	6.8	6.3	5.6	5.3	4.8	3.8	-	-	-	-	-	-
LPC4 80-160/1,1	1.1	1.5	8.6	-	-	-	-	-	-	8.5	8.5	8.4	8.4	8.3	8.2	7.9	7.3	7.1	6.7	5.9	5	-	-	-	-	-
LPC4 80-160/1,5	1.5	2	10.4	-	-	-	-	-	-	10.2	10.1	10	10	9.9	9.8	9.5	9	8.8	8.4	7.5	6.5	-	-	-	-	-
LPC4 80-200/2,2	2.2	3	12.6	-	-	-	-	-	-	-	-	12.5	12.5	12.4	12.3	12.1	11.7	11.2	11.1	10.4	9.6	8.5	-	-	-	-
LPC4 80-200/3	3	4	15.4	-	-	-	-	-	-	-	-	15.3	15.3	15.2	15.1	15	14.6	14.2	14.2	13.6	12.8	11.9	11	-	-	-
LPC4 80-250/4	4.0	5.5	20	-	-	-	-	-	-	-	19.9	19.8	19.8	19.7	19.5	19	18.4	18	17.5	16.5	15.2	13.8	12	10.5	-	-
LPC4 80-250/5,5	5.5	7.5	23.2	-	-	-	-	-	-	-	-	23	22.9	22.8	22.5	22	21.8	21.5	20.6	19.7	18.7	17.5	15.5	12	-	-


Pump type LPC4	Power		Capacity																											
	[kW]	[HP]	l/min																											
			0	600	666.7	700	800	833.3	900	1000	1100	1200	1250	1300	1500	1667	1750	2000	2250	2500	2750	3000	3500	4000	4500	4667	5000			
Three Phase			metric head in meters																											
LPC4 100-160/1,5	1.5	2	8	7.7	7.6	7.5	7.2	7.1	7	6.7	6.4	6.1	6	5.8	5	-	-	-	-	-	-	-	-	-	-	-	-	-		
LPC4 100-160/2,2	2.2	3	10	9.7	9.6	9.5	9.4	9.3	9.1	8.8	8.5	8.2	8	7.9	7.1	6.3	6	-	-	-	-	-	-	-	-	-	-	-		
LPC4 100-200/3	3.00	4	12.5	12.0	11.9	11.8	11.5	11.4	11.3	10.9	10.5	10	9.6	9.5	8.5	7.5	7	-	-	-	-	-	-	-	-	-	-	-		
LPC4 100-200/4	4.00	5.5	14.9	14.4	14.3	14.2	14	13.9	13.8	13.4	13.1	12.7	12.4	12.2	11	9.7	9	6.5	-	-	-	-	-	-	-	-	-	-		
LPC4 100-250/5,5	5.5	7.5	20	-	-	-	19.2	19.0	18.9	18.5	18.1	17.7	17.5	17.2	16	14.9	14.5	12	-	-	-	-	-	-	-	-	-	-		
LPC4 100-250/7,5	7.5	10	23.5	-	-	-	22.3	22.2	22.1	21.9	21.7	21.3	21.1	21	20	19	18.5	16.8	14.5	-	-	-	-	-	-	-	-	-		
LPC4125-250/5,5R	5.5	7.5	13.2	-	12.7	12.6	12.4	12.3	12.2	11.9	11.8	11	10.9	10.6	9.6	8.6	8	6	3.5	-	-	-	-	-	-	-	-	-		
LPC4 125-250/5,5	5.5	7.5	16.1	-	-	-	-	15.6	15.5	15.2	15	14.6	14.4	14.1	12.4	12.3	12	10	8	6	-	-	-	-	-	-	-	-		
LPC4 125-250/7,5	7.5	10	19.8	-	-	-	-	19.5	19.4	19.2	19	18.8	17.7	18.3	18	17.5	17	15.7	14	12.5	10.5	-	-	-	-	-	-	-		
LPC4 125-250/11	11	15	21.9	-	-	-	-	-	-	-	21.6	21.4	21.3	21.2	21.2	20.8	20.3	20	19	17.8	16.2	14.2	12	-	-	-	-	-		
LPC4 150-250/7,5	7.5	10	16	-	-	-	-	-	-	-	-	-	-	15.0	14.9	14.7	14.4	14.3	13.8	13.3	12.6	11.8	11	9	6.5	4	-	-		
LPC4 150-250/11R	11	15	17.9	-	-	-	-	-	-	-	-	-	-	-	-	-	16.6	16.5	16	15.5	15	14.2	13.5	11.8	9.5	7.4	6.8	4.6		
LPC4 150-250/11	11	15	19.2	-	-	-	-	-	-	-	-	-	-	18.9	18.8	18.5	18.2	18.0	17.7	17.2	16.7	16.2	15.3	13.6	11.5	9.4	-	-		
LPC4 150-250/15R	15	20	21	-	-	-	-	-	-	-	-	-	-	20.5	20.4	20.1	19.9	19.8	19.5	19.0	18.6	18	17.4	15.7	13.9	11.9	10.5	-		
LPC4 150-250/15	15	20	21.8	-	-	-	-	-	-	-	-	-	-	-	-	-	20.8	20.7	20.5	19.8	19.5	19	18.5	17	15	13	11.8	10.5		

LPC4 32-100/0.25 (0.25 kW) MEI > 0.40 Impeller diameter = 99 mm

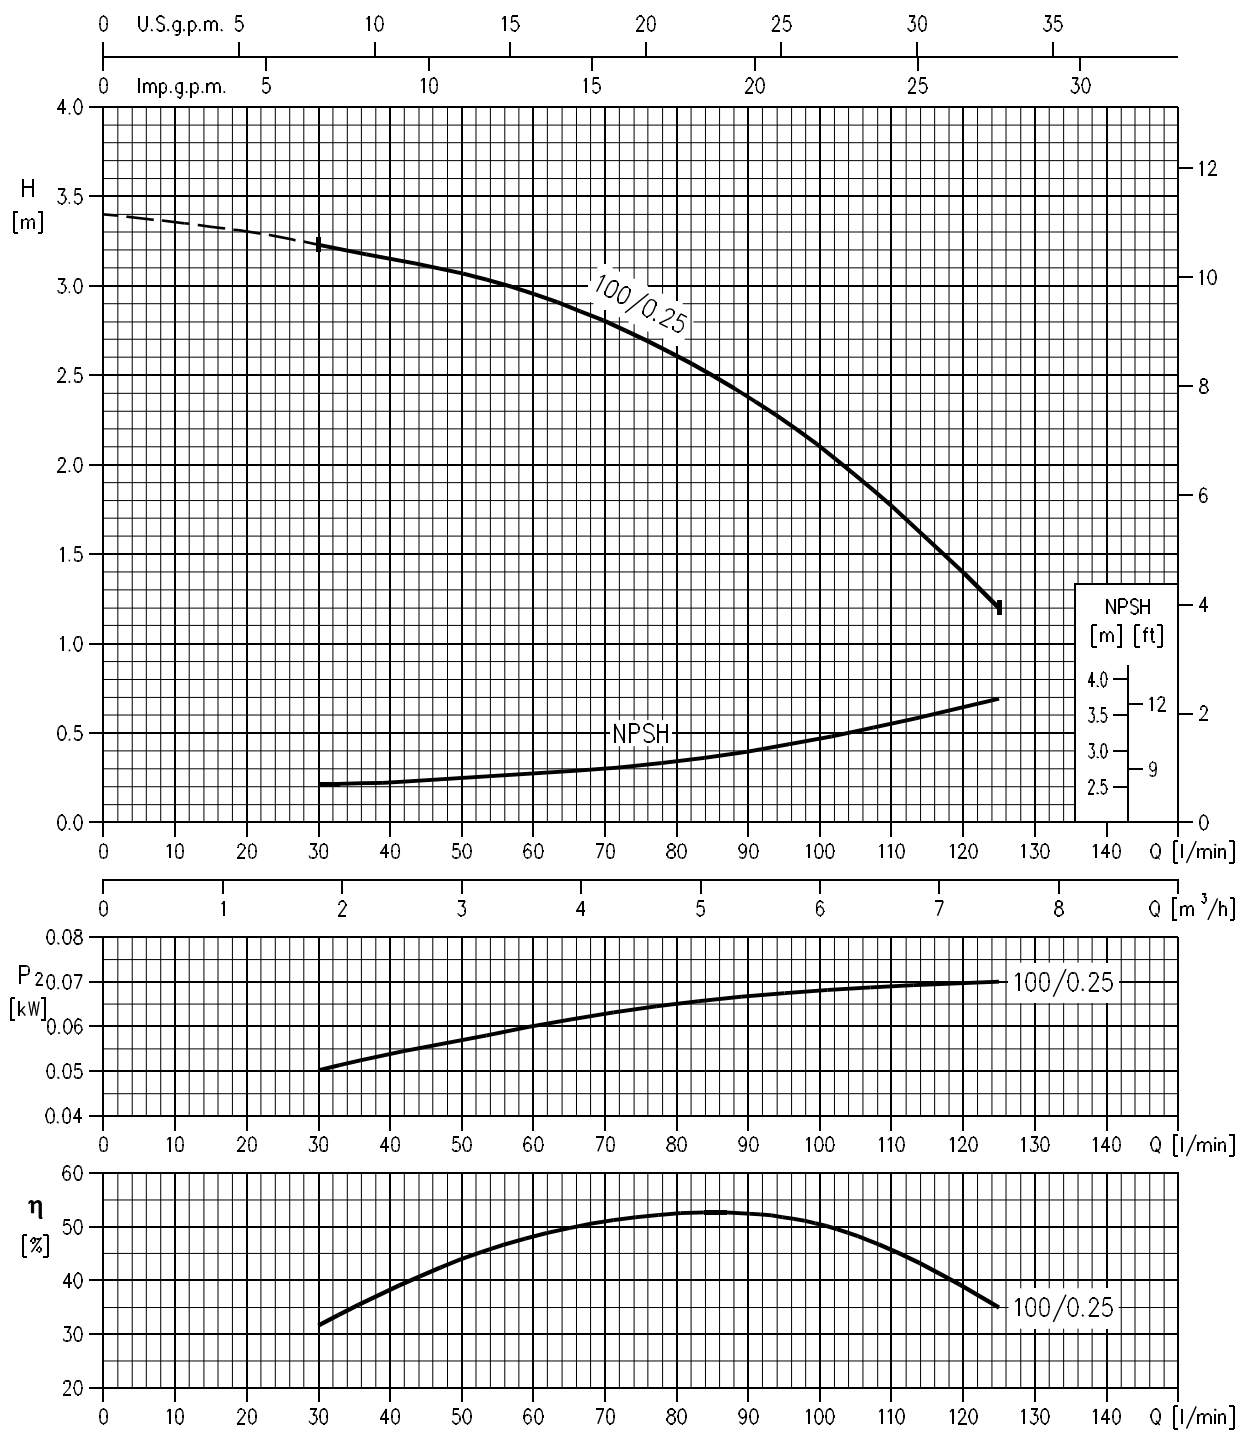

Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

LPC4 40-100/0.25 (0.25 kW) MEI > 0.40 Impeller diameter = 105 mm

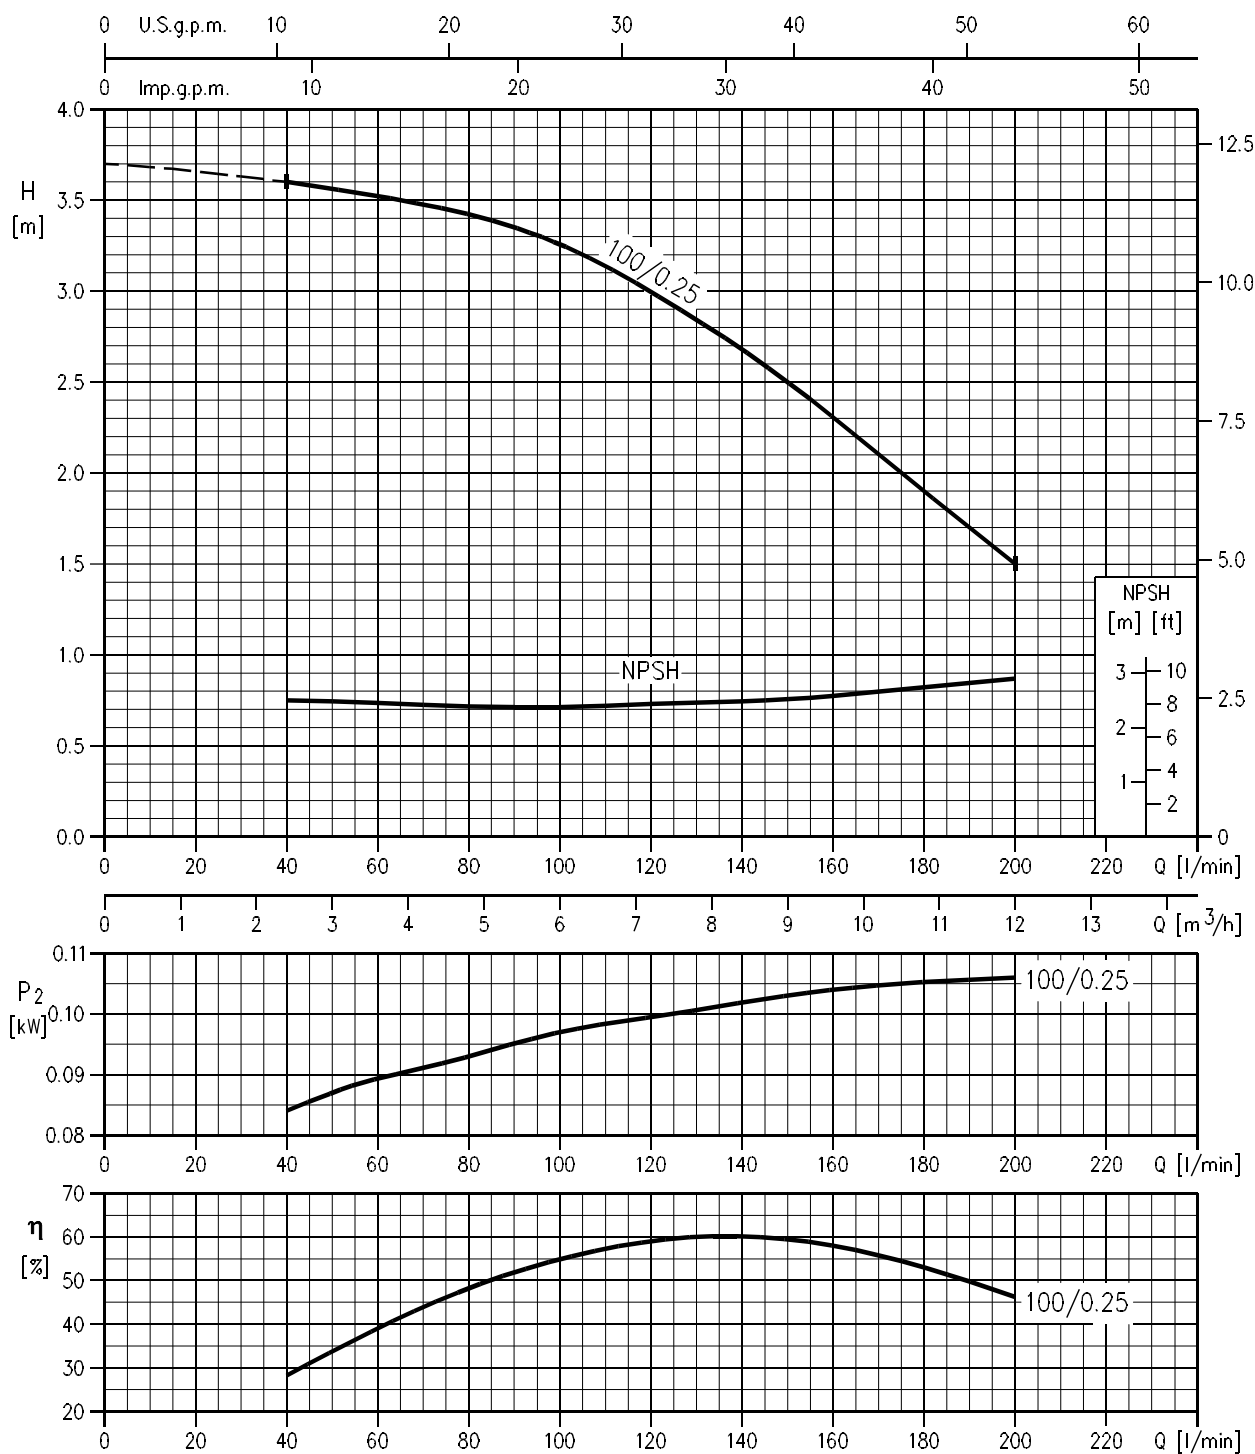

Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A


PERFORMANCE CURVE

50Hz

Rev. A


LPC4 40-125/0.25R (0.25 kW) MEI > 0.40 Impeller diameter = 120 mm

LPC4 40-125/0.25 (0.25 kW) MEI > 0.40 Impeller diameter = 139 mm

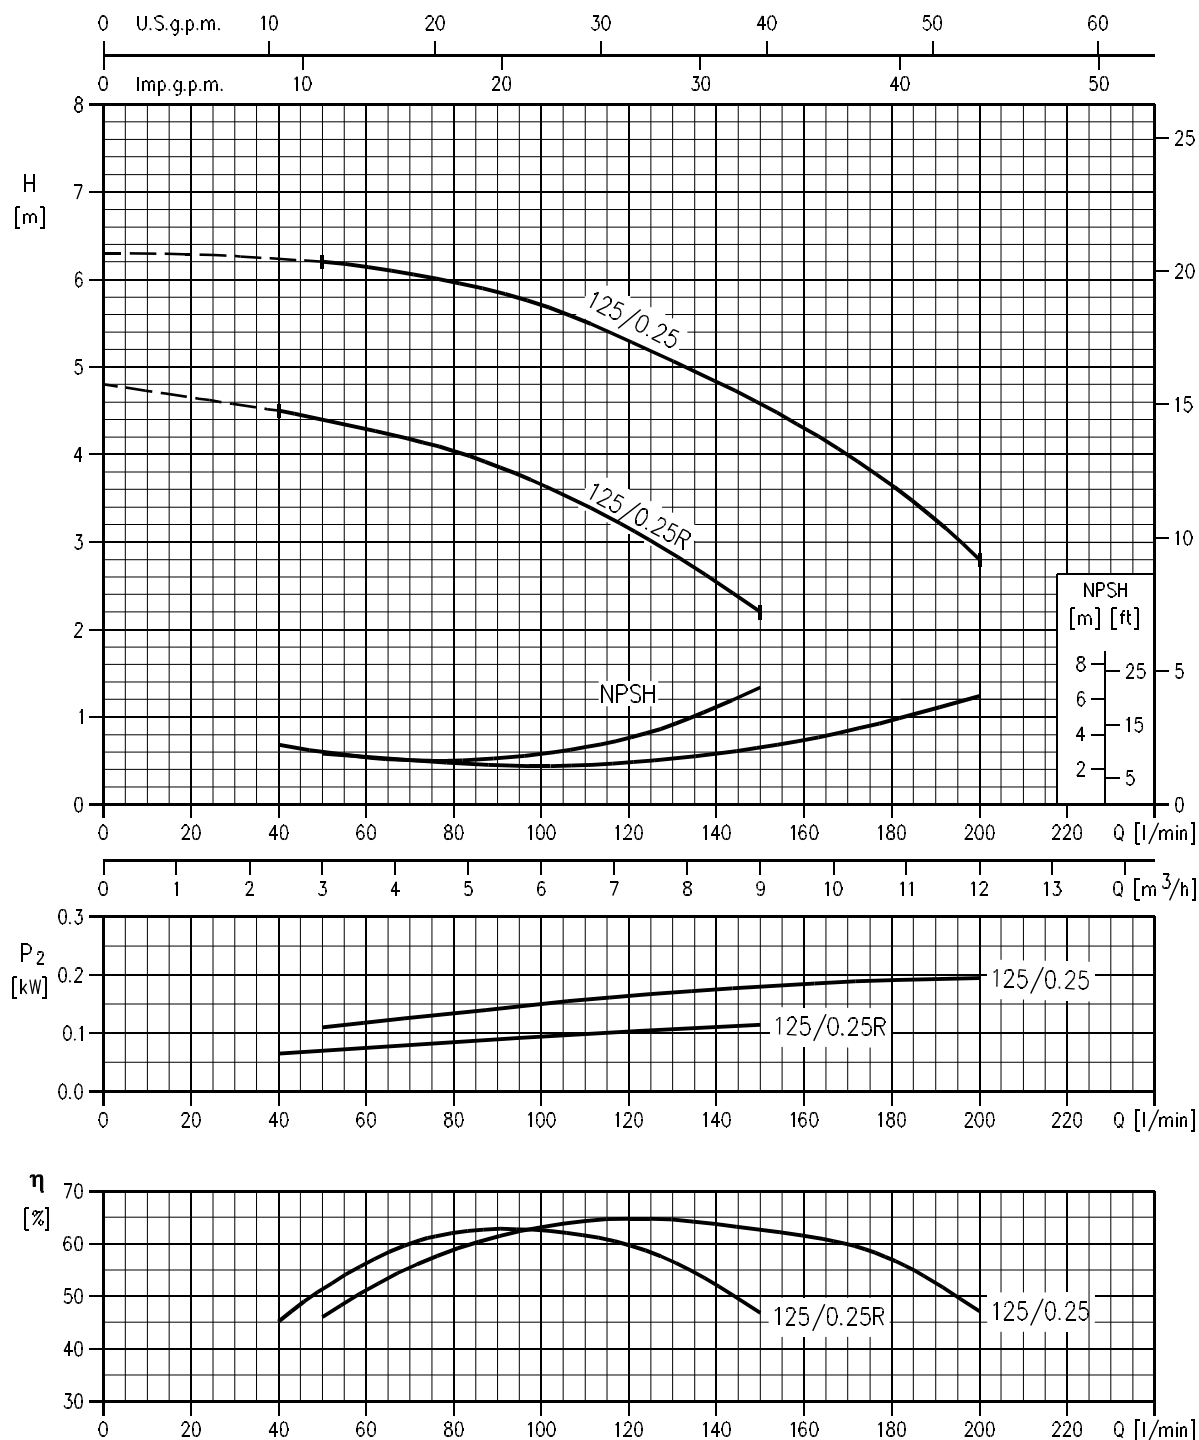

Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A


LPC4 40-160/0.37 (0.37 kW) MEI > 0.40 Impeller diameter = 169 mm

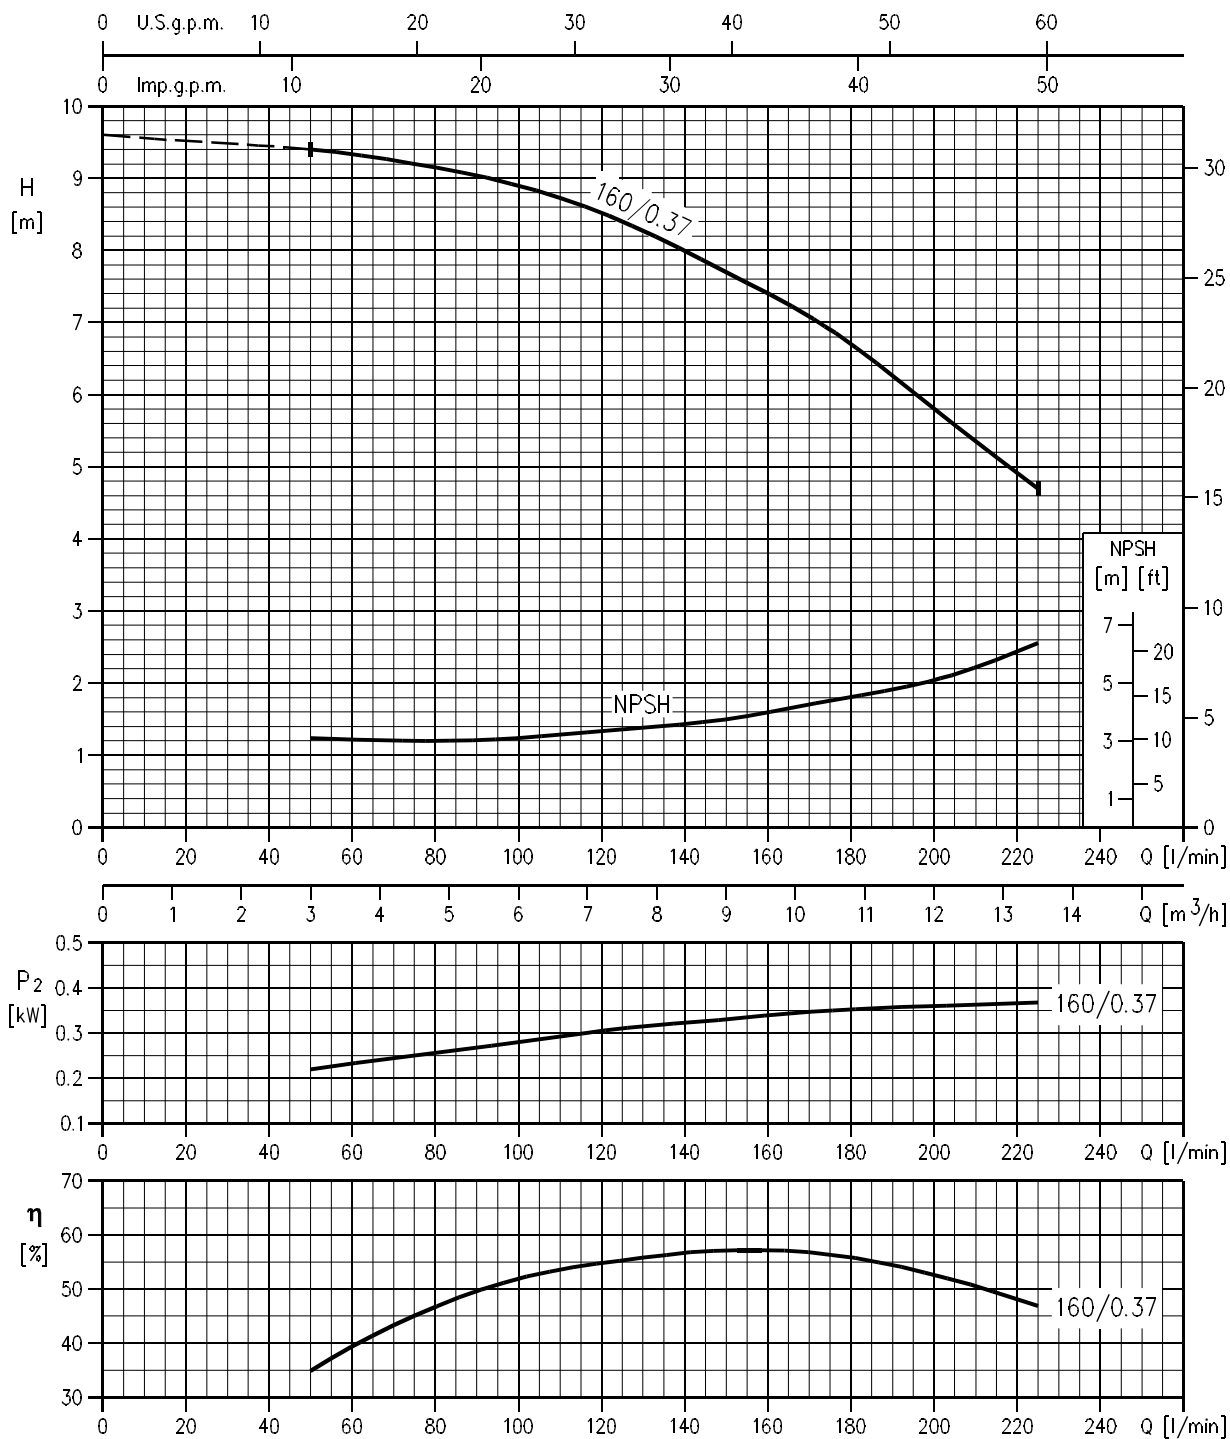

Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

LPC4 40-200/0.75 (0.75 kW) MEI > 0.40 Impeller diameter = 200 mm

LPC4 40-200/1.1 (1.1 kW) MEI > 0.40 Impeller diameter = 209 mm

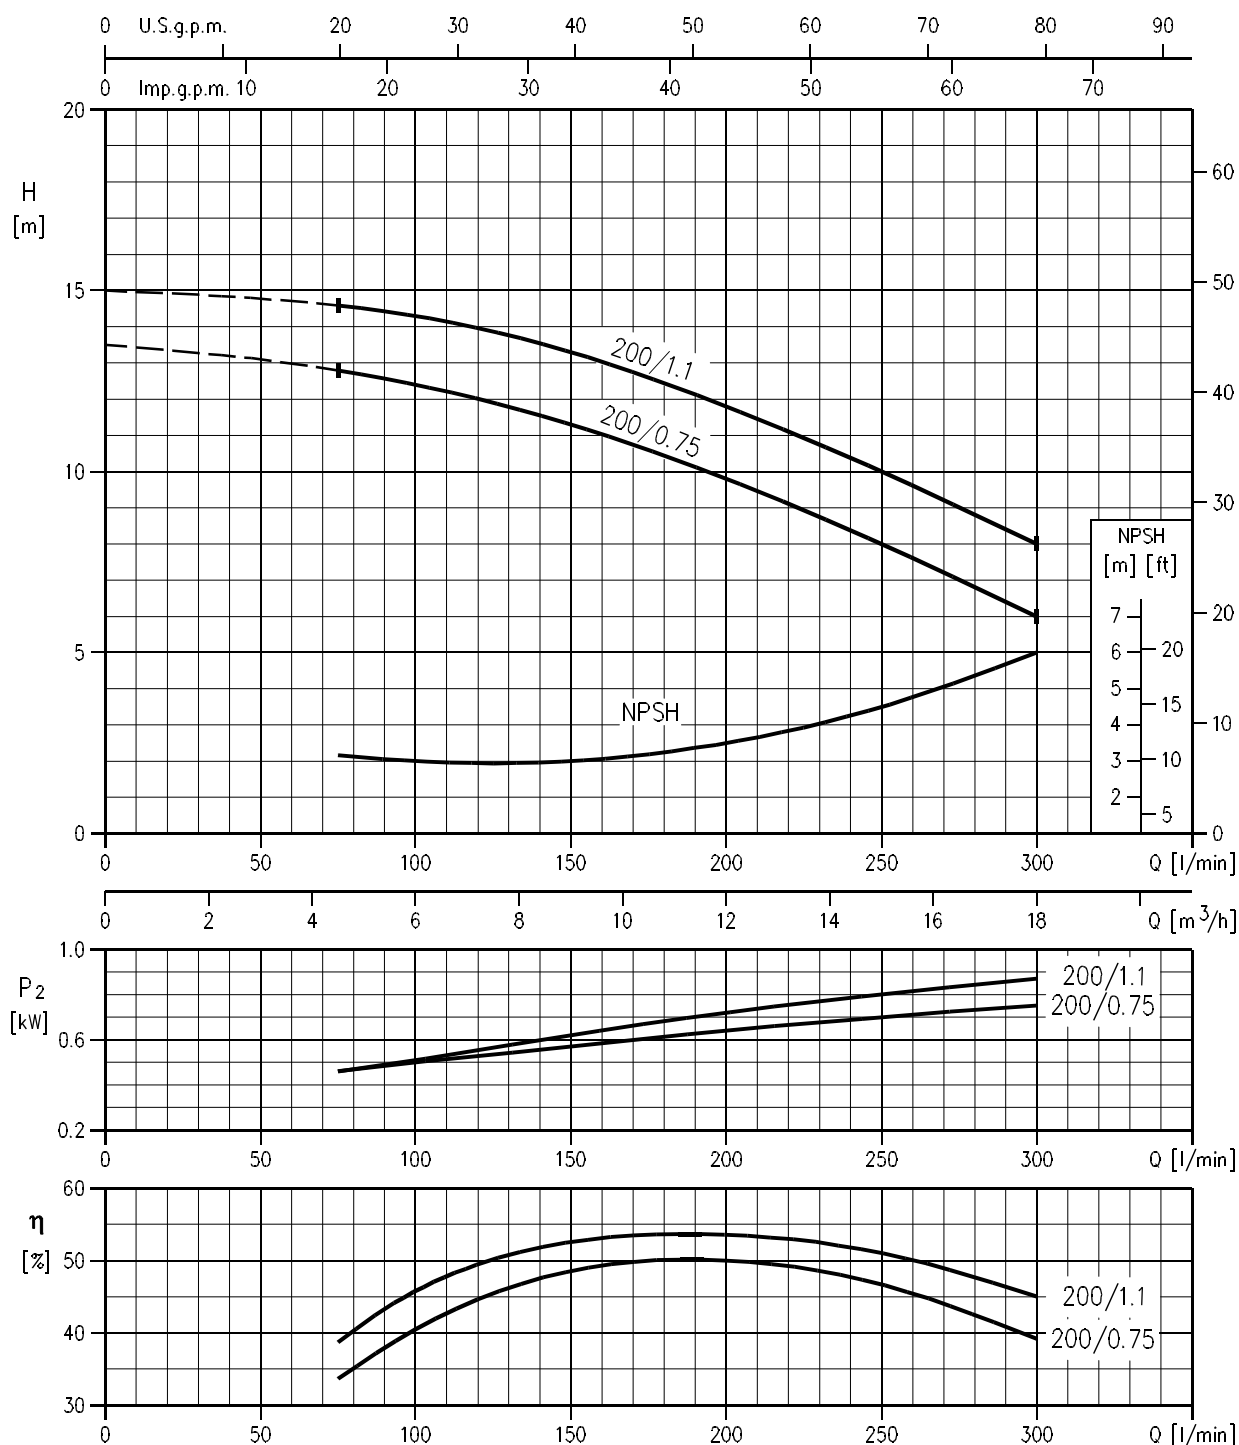

Rotation speed $\approx 2900 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A


PERFORMANCE CURVE

50Hz

Rev. A

LPC4 40-250/1.1 (1.1 kW) MEI > 0.40 Impeller diameter = 240 mm

LPC4 40-250/01.5 (1.5 kW) MEI > 0.40 Impeller diameter = 260.5 mm

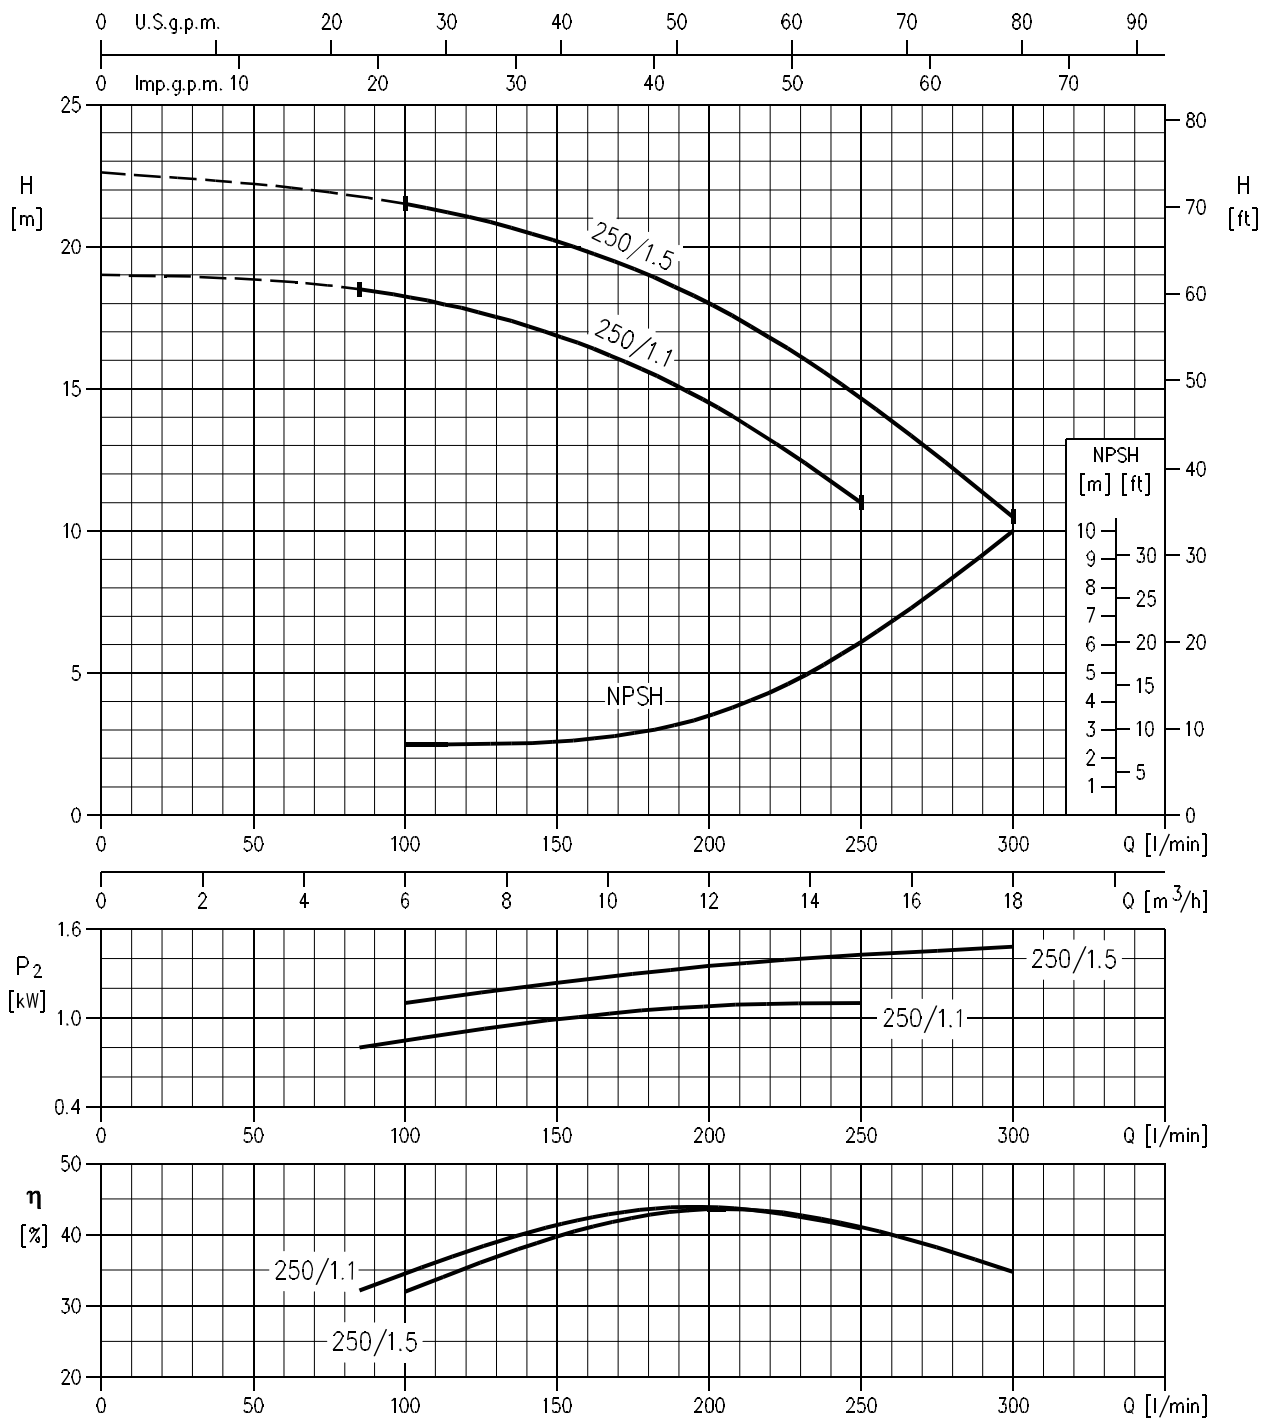

Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A


PERFORMANCE CURVE

50Hz

Rev. A


LPC4 50-125/0.25 (0.25 kW) MEI > 0.40 Impeller diameter = 129 mm

LPC4 50-125/0.37 (0.37 kW) MEI > 0.40 Impeller diameter = 140.5 mm

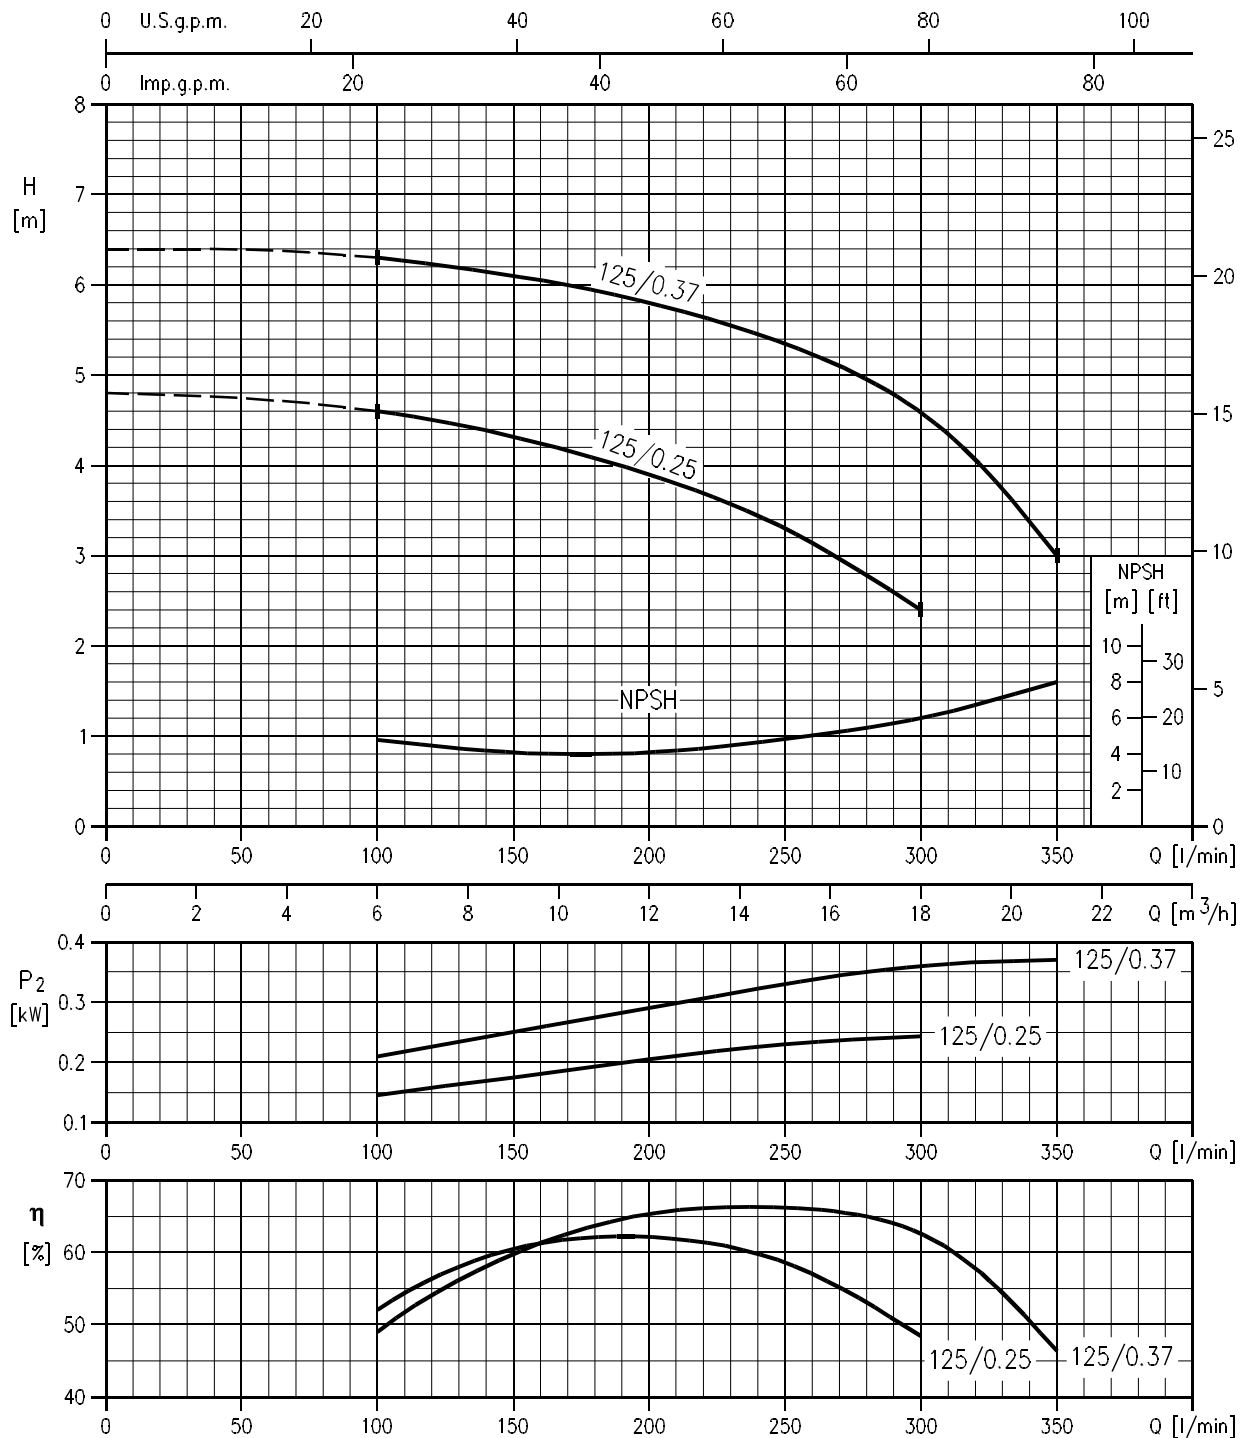


Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

LPC4 50-160/0.55 (0.55 kW) MEI > 0.40 Impeller diameter = 169 mm

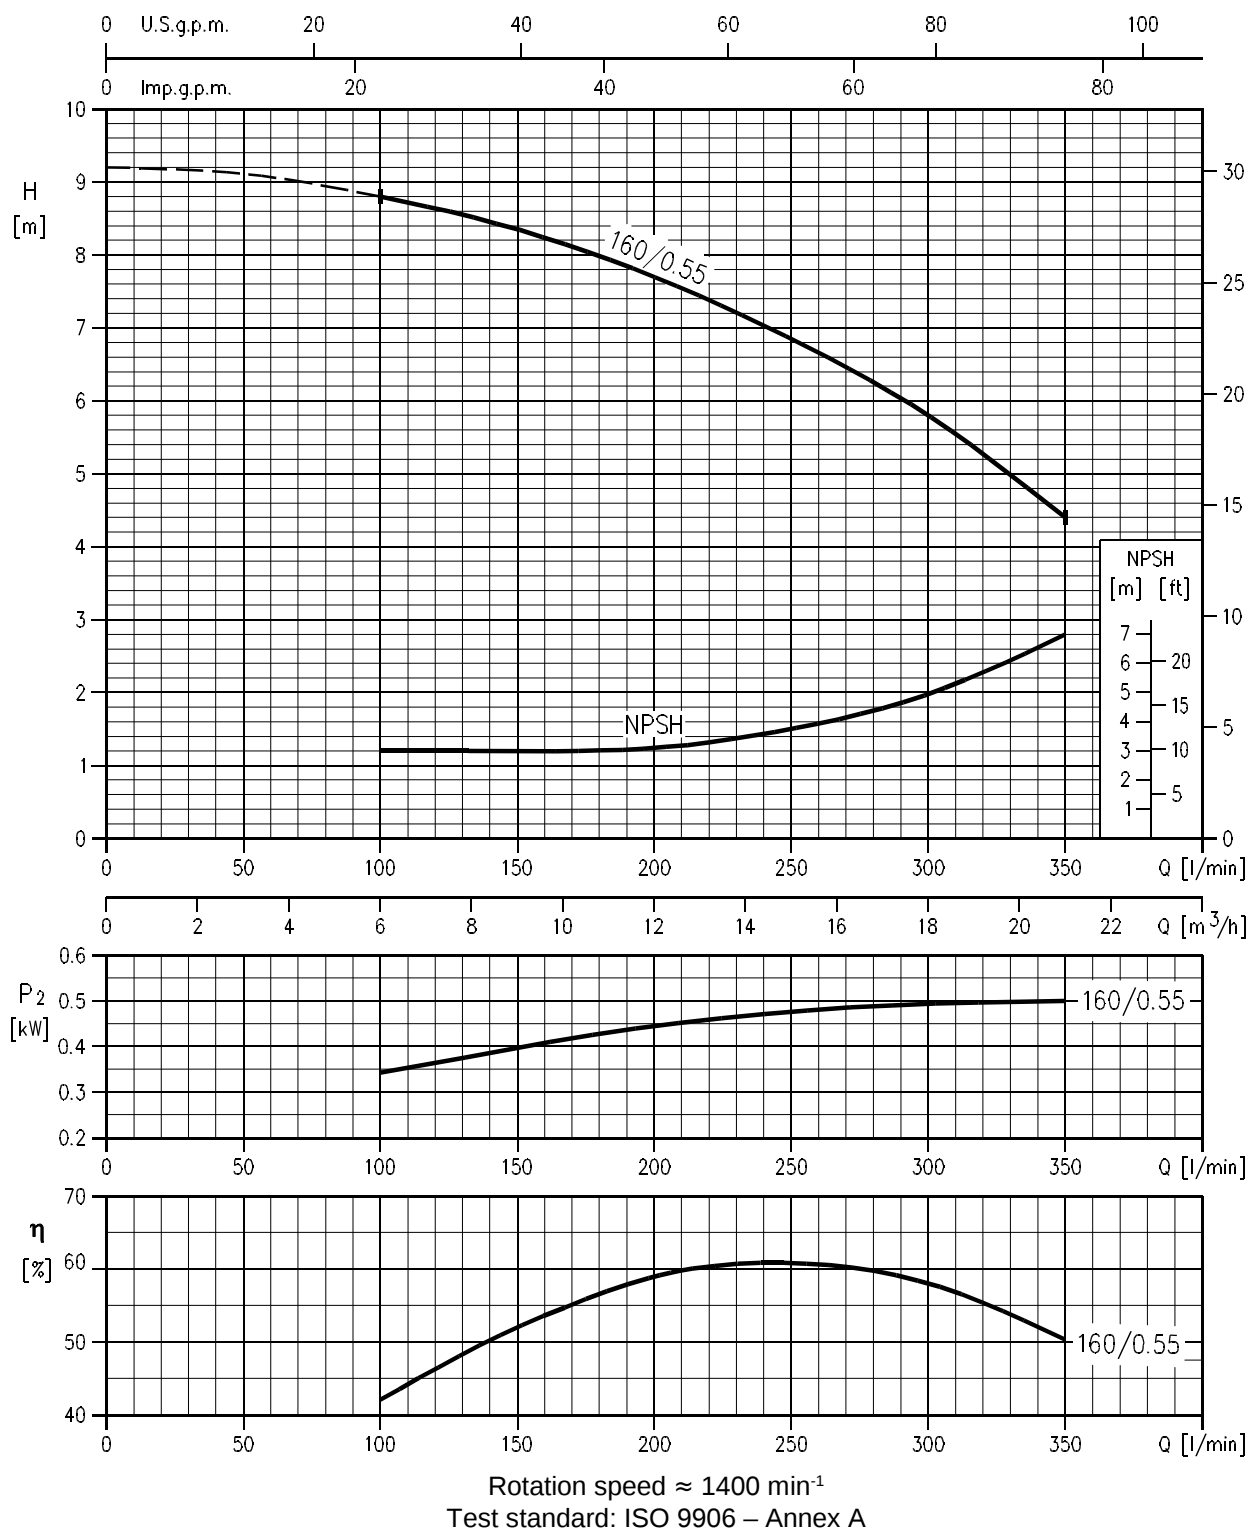

LPC4 50-200/1.1R (1.1 kW) MEI > 0.40 Impeller diameter = 201 mm


LPC4 50-200/1.1 (1.1 kW) MEI > 0.40 Impeller diameter = 210 mm

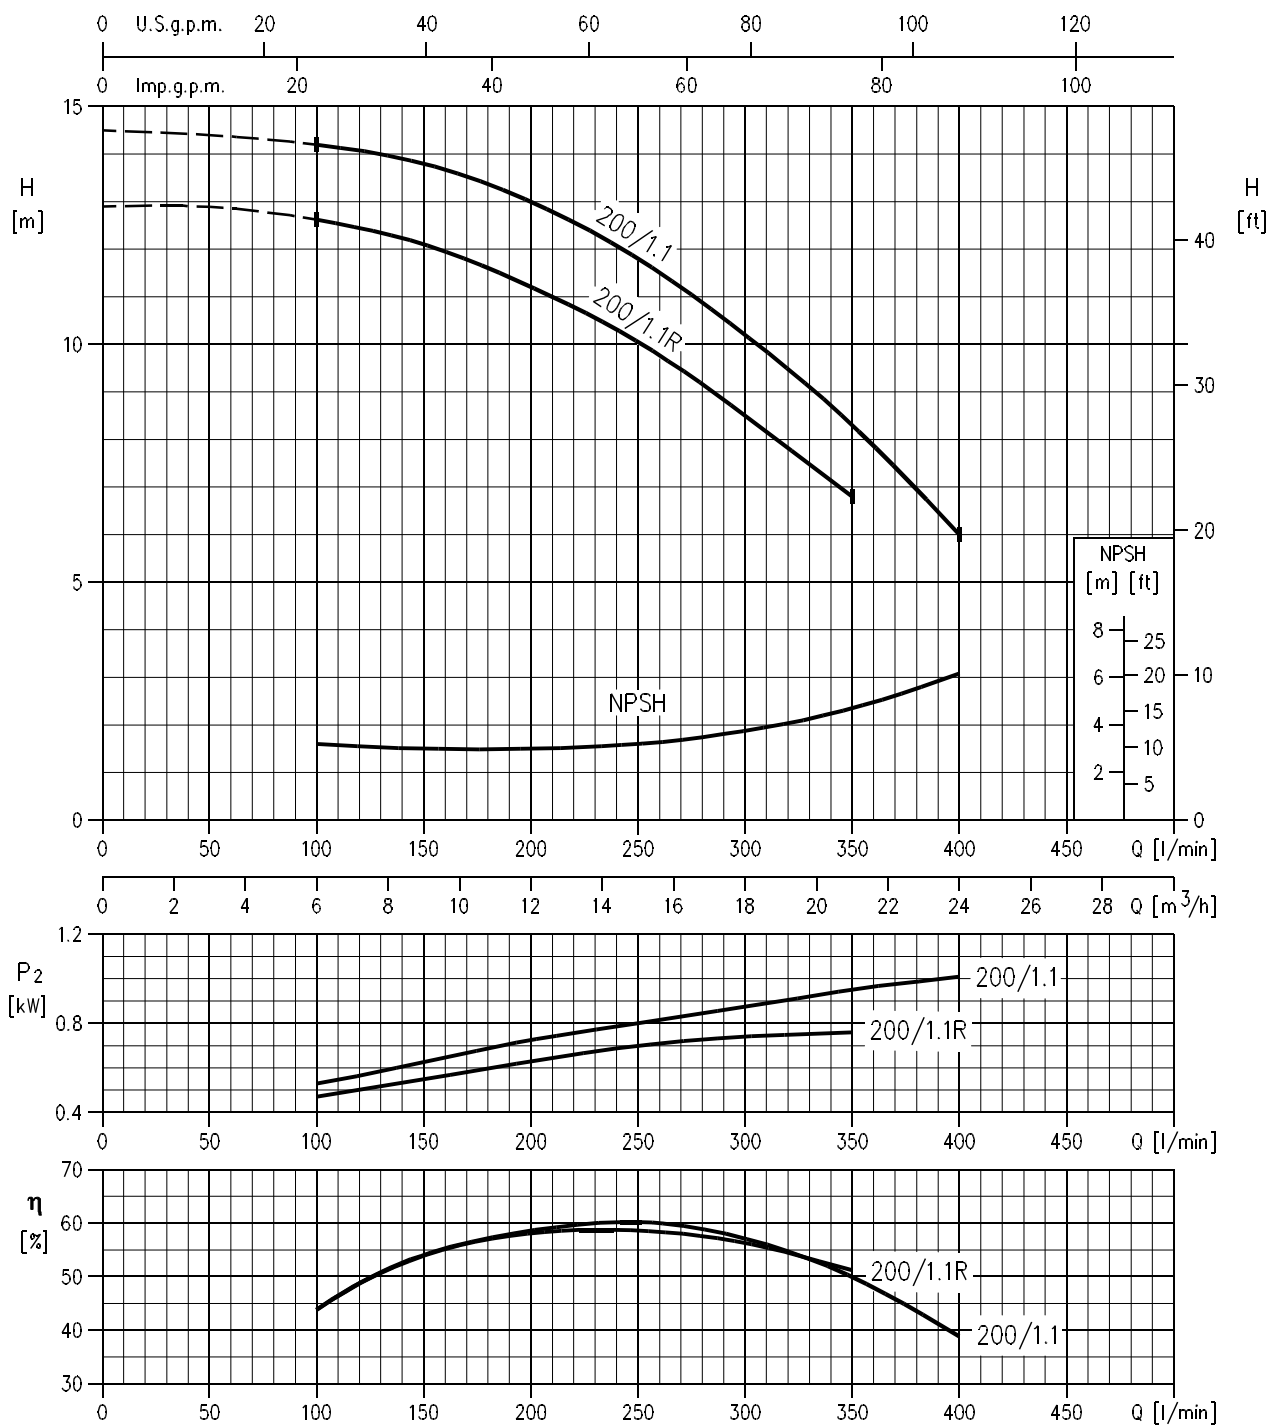

Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

LPC4 50-250/1.5 (1.5 kW) MEI > 0.40 Impeller diameter = 240 mm


LPC4 50-250/2.2 (2.2 kW) MEI > 0.40 Impeller diameter = 259 mm

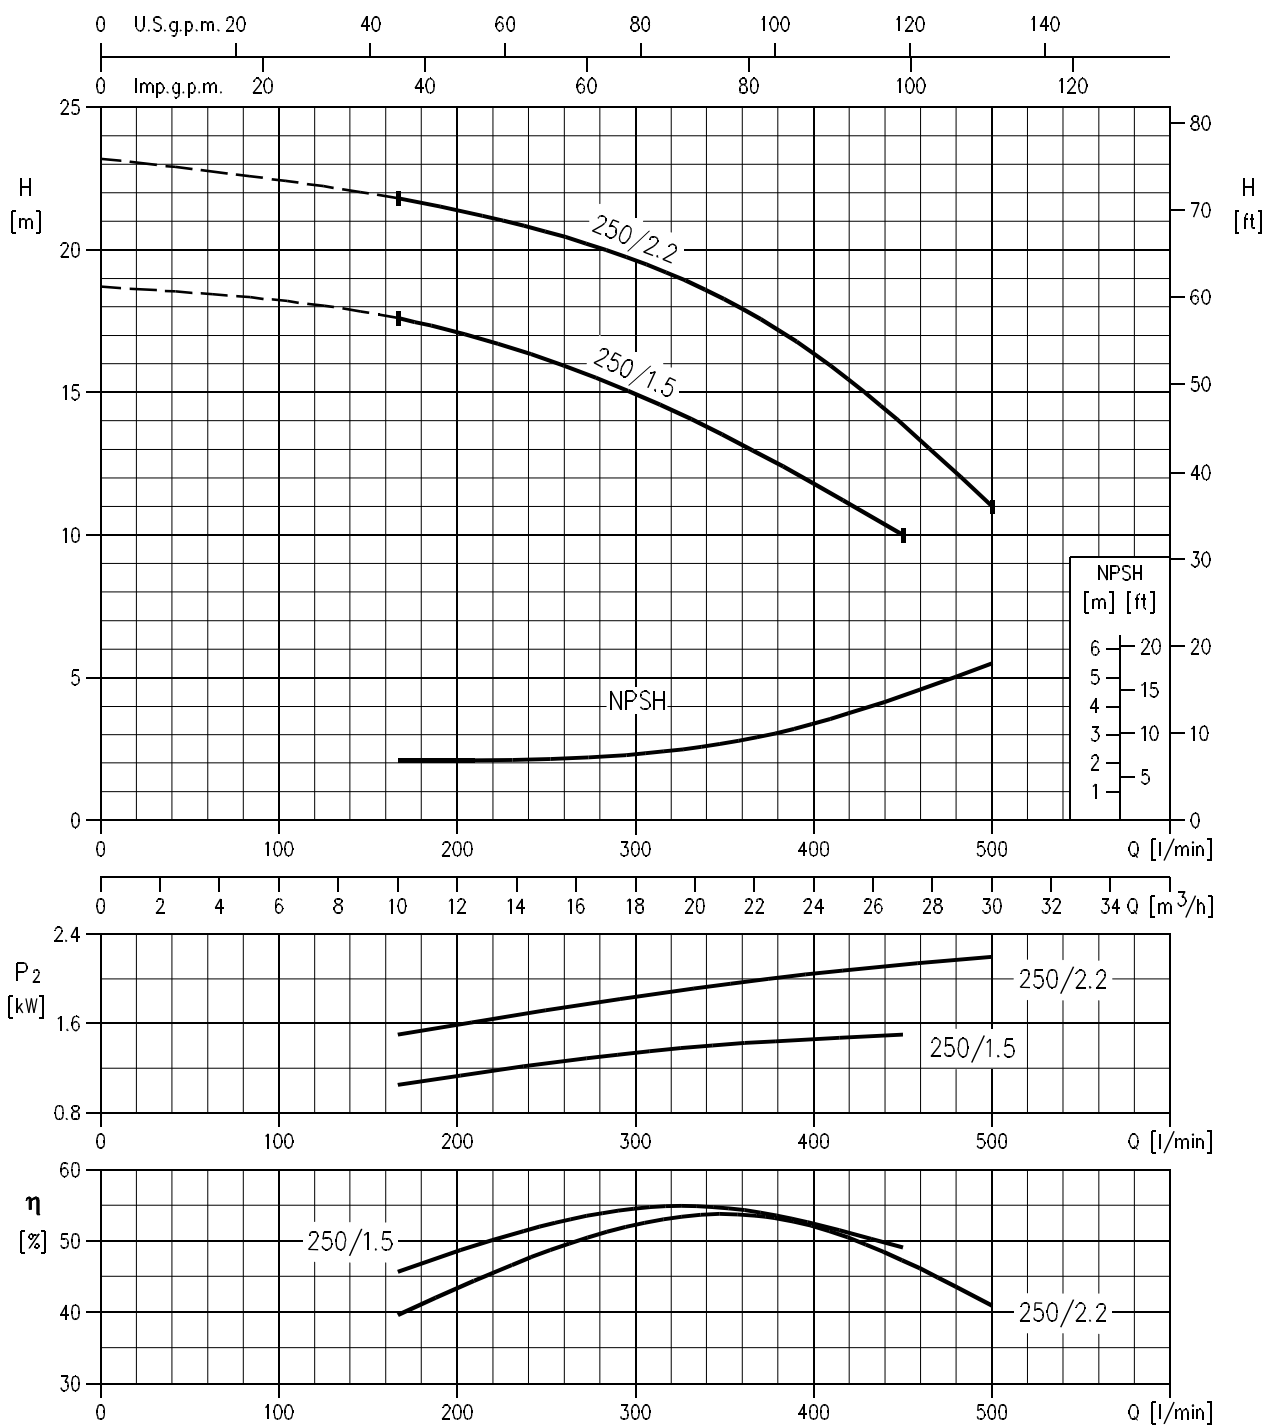

Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

LPC4 65-125/0.37 (0.37 kW) MEI > 0.40 Impeller diameter = 130 mm

LPC4 65-125/0.55 (0.55 kW) MEI > 0.40 Impeller diameter = 139 mm

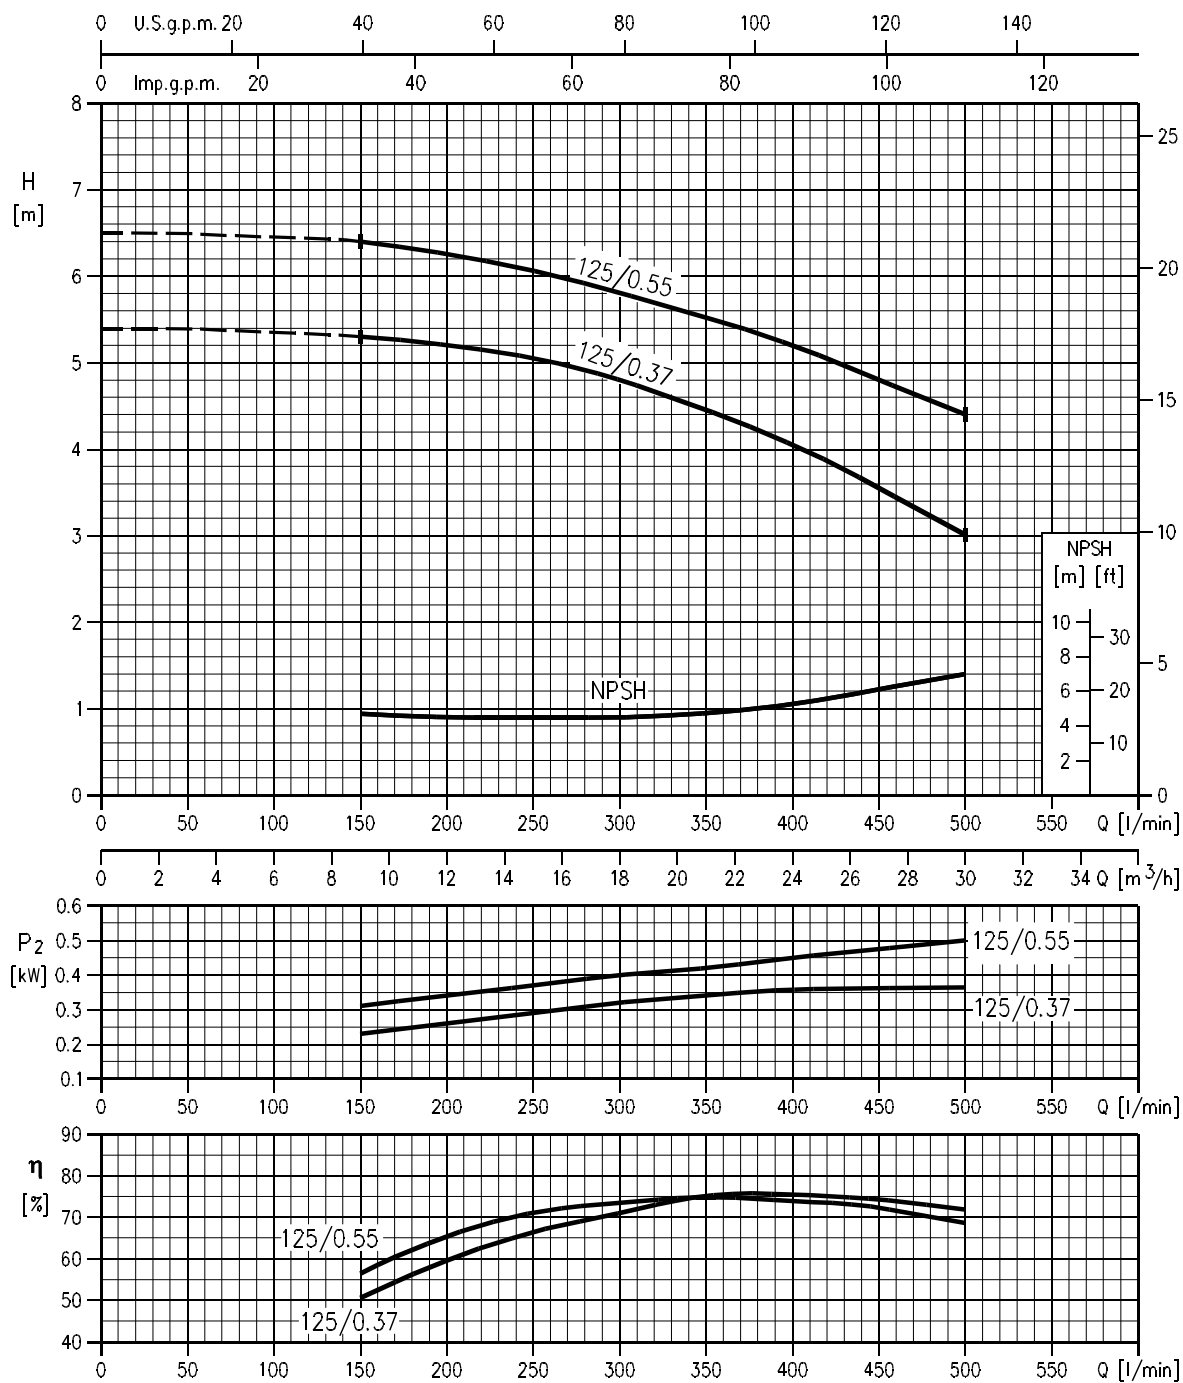

Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A


PERFORMANCE CURVE

50Hz

Rev. A


LPC4 65-160/0.75 (0.75 kW) MEI > 0.40 Impeller diameter = 160 mm

LPC4 65-160/1.1 (1.1 kW) MEI > 0.40 Impeller diameter = 169 mm

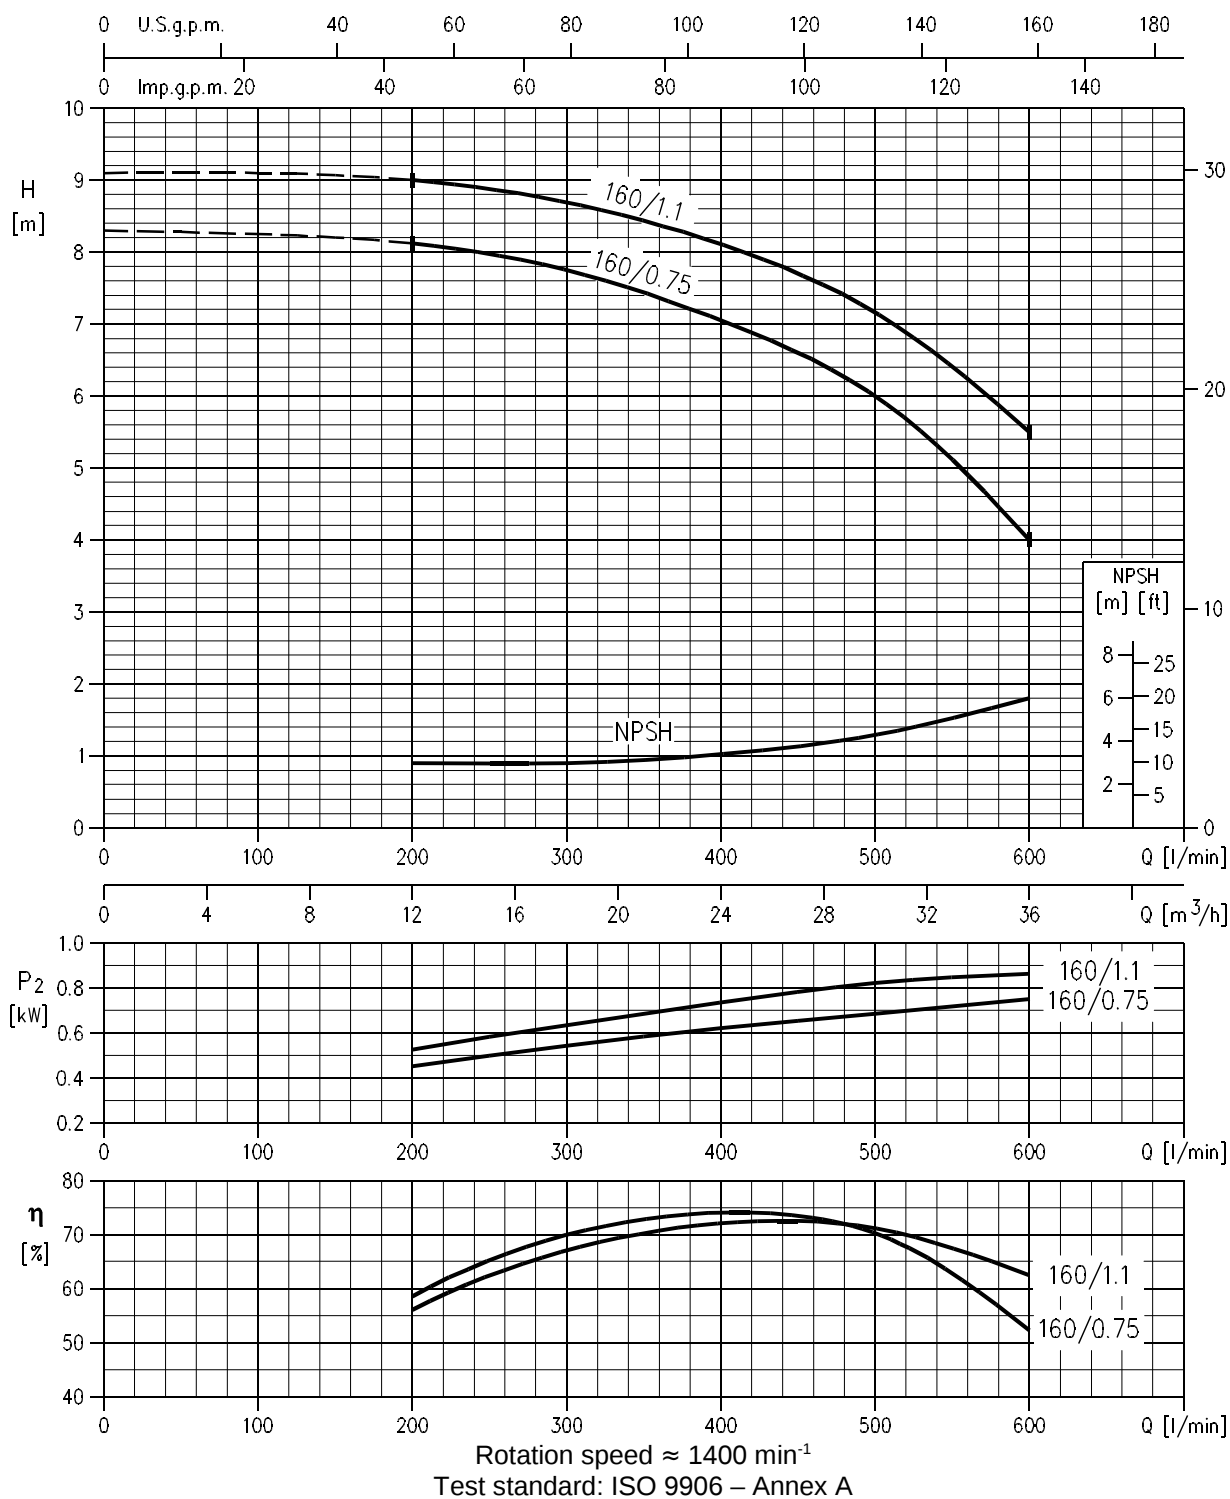

LPC4 65-200/1.1 (1.1 kW) MEI > 0.40 Impeller diameter = 200 mm


LPC4 65-200/1.5 (1.5 kW) MEI > 0.40 Impeller diameter = 209 mm

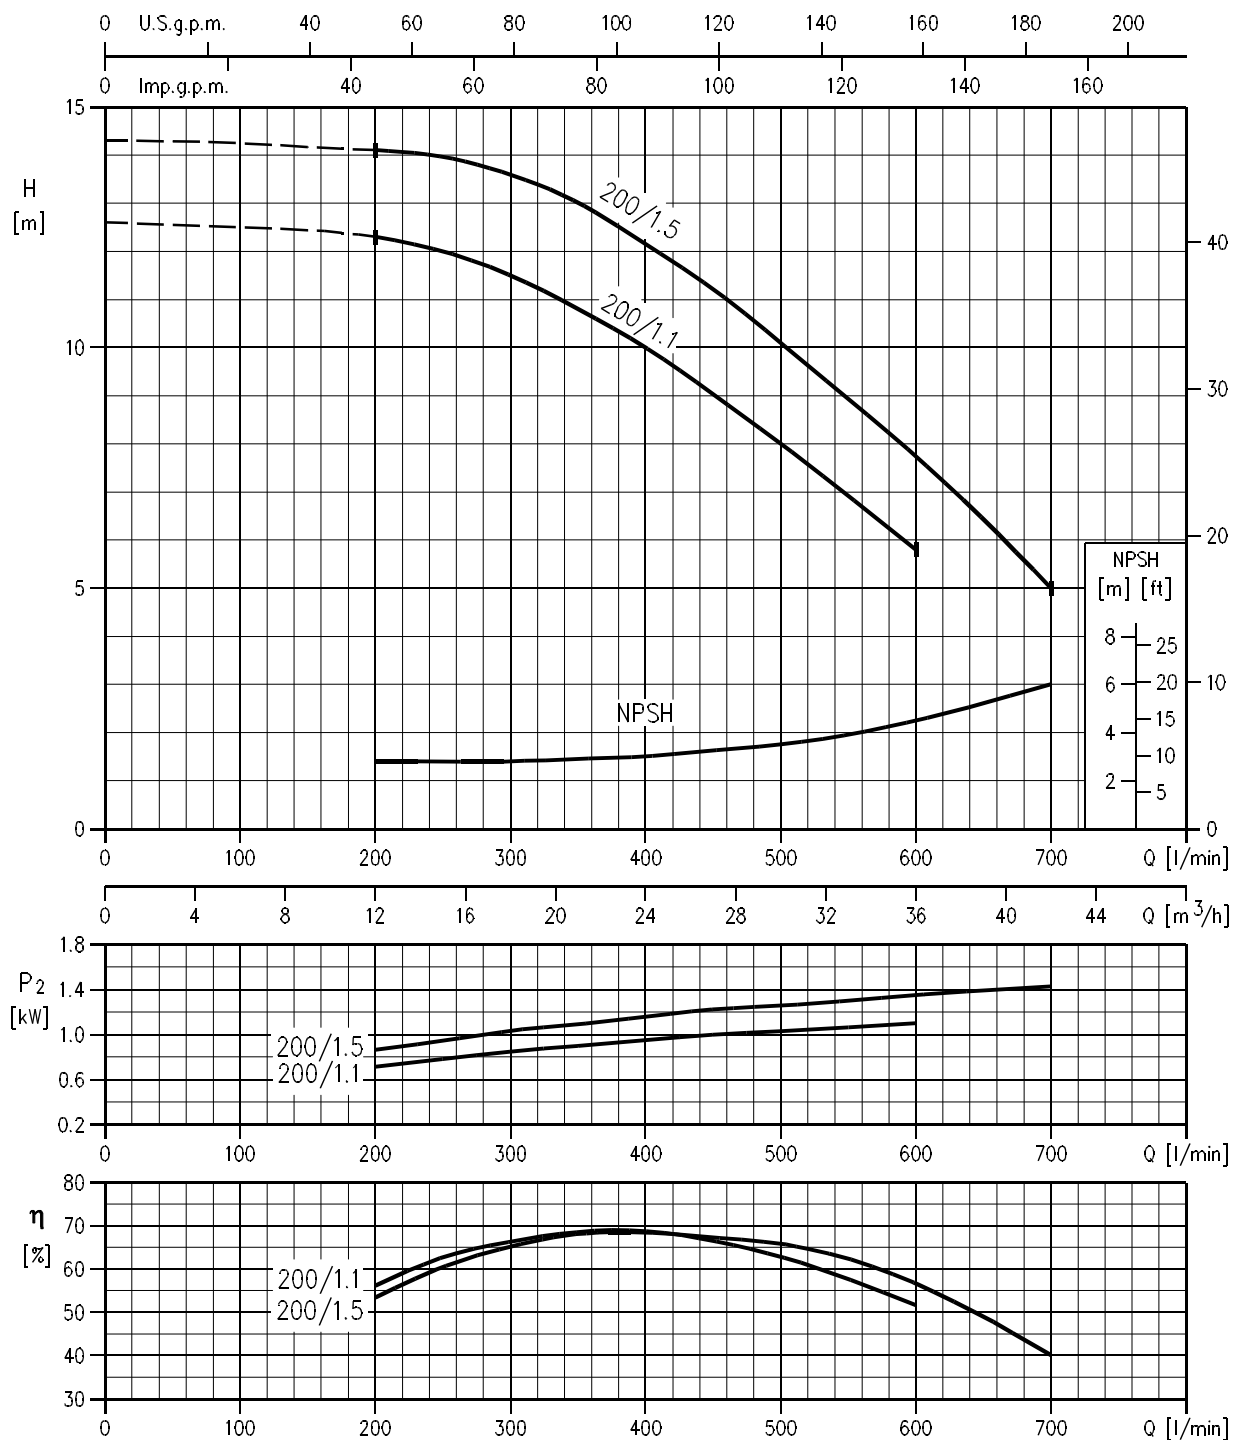

Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

LPC4 65-250/2.2 (2.2 kW) MEI > 0.40 Impeller diameter = 235 mm

LPC4 65-250/3.0 (3.0 kW) MEI > 0.40 Impeller diameter = 259 mm

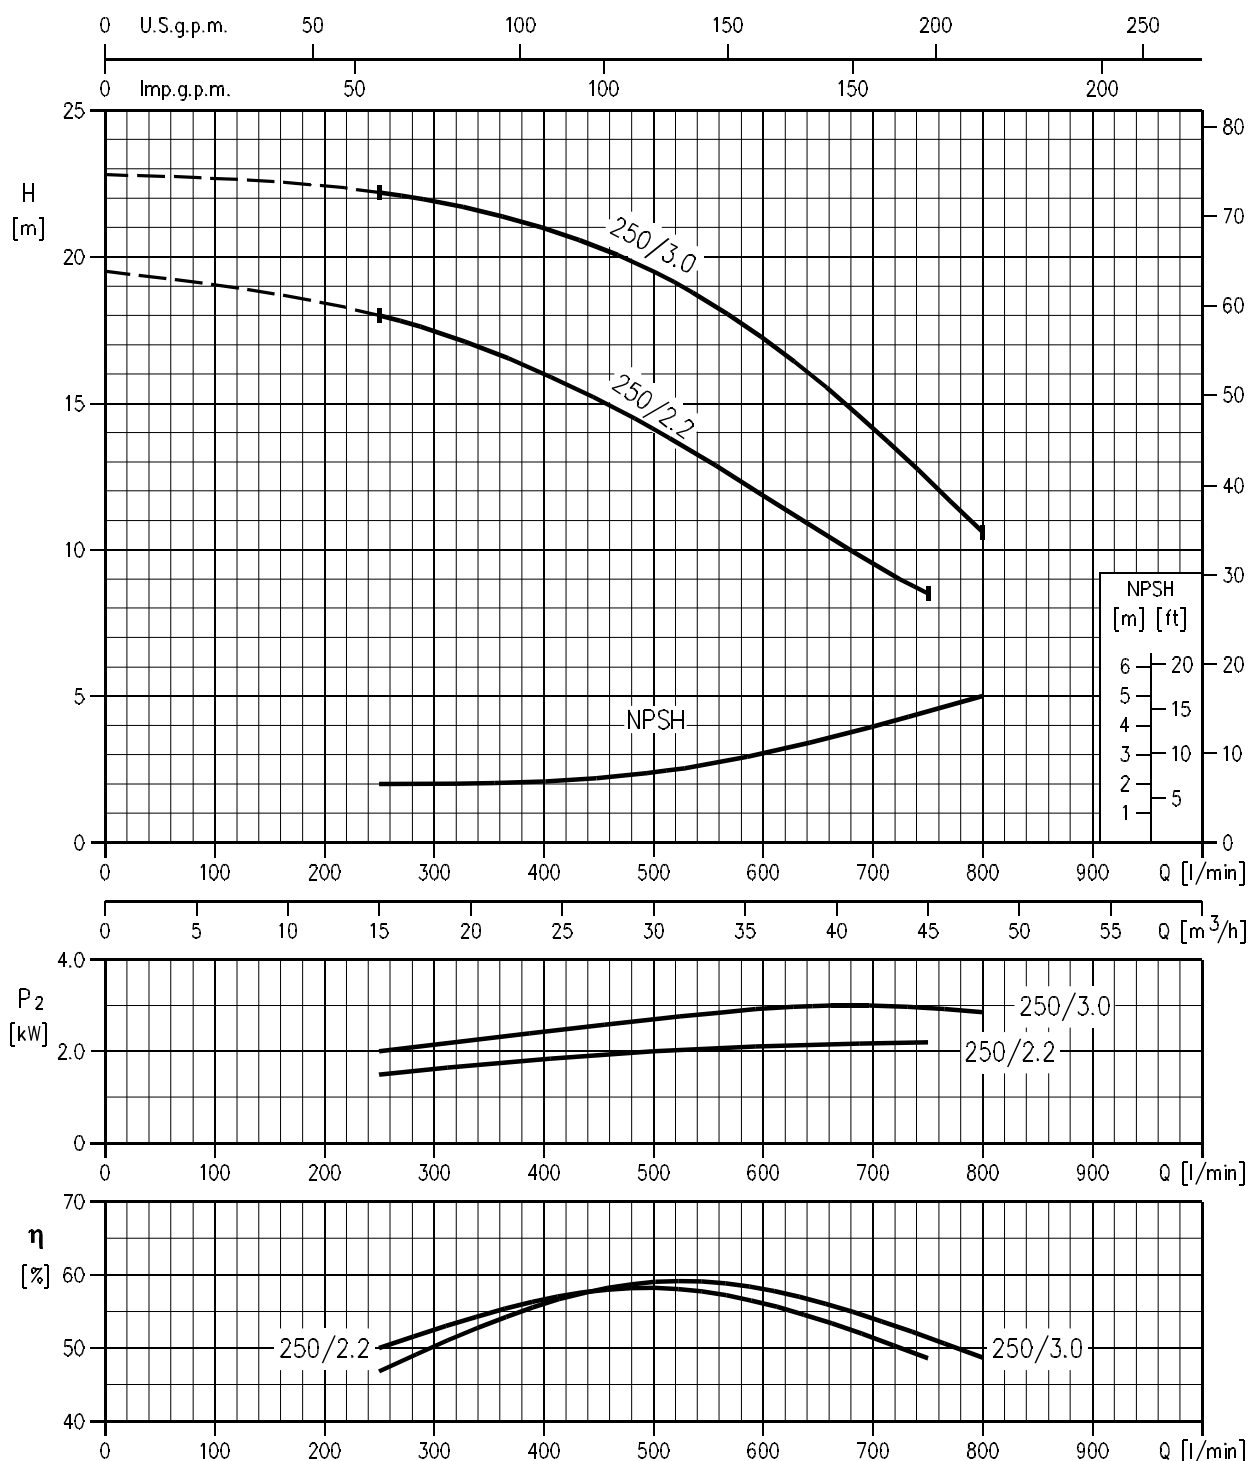

Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

PERFORMANCE CURVE

50Hz


Rev. A

LPC4 80-160/0.75 (0.75 kW) MEI > 0.40 Impeller diameter = 138 mm

LPC4 80-160/1.1R (1.1 kW) MEI > 0.40 Impeller diameter = 148 mm

LPC4 80-160/1.1 (1.1 kW) MEI > 0.40 Impeller diameter = 158 mm


LPC4 80-160/1.5 (1.5 kW) MEI > 0.40 Impeller diameter = 169 mm

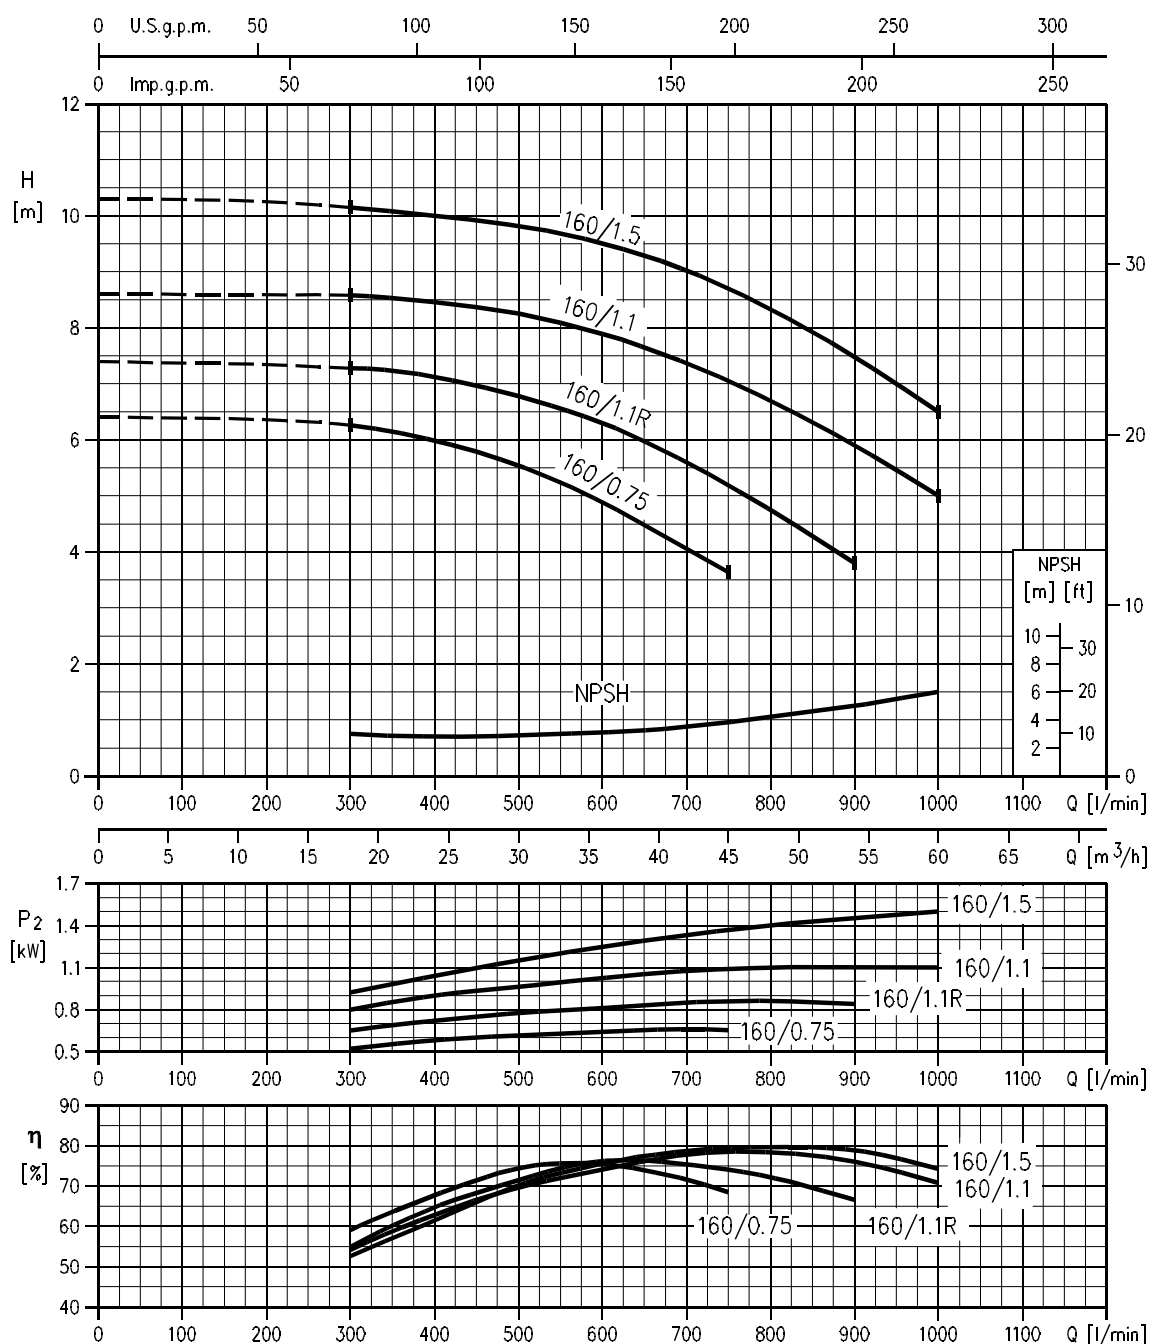

Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

LPC4 80-200/2.2 (2.2 kW) MEI > 0.40 Impeller diameter = 192 mm


LPC4 80-200/3.0 (3.0 kW) MEI > 0.40 Impeller diameter = 210.5 mm

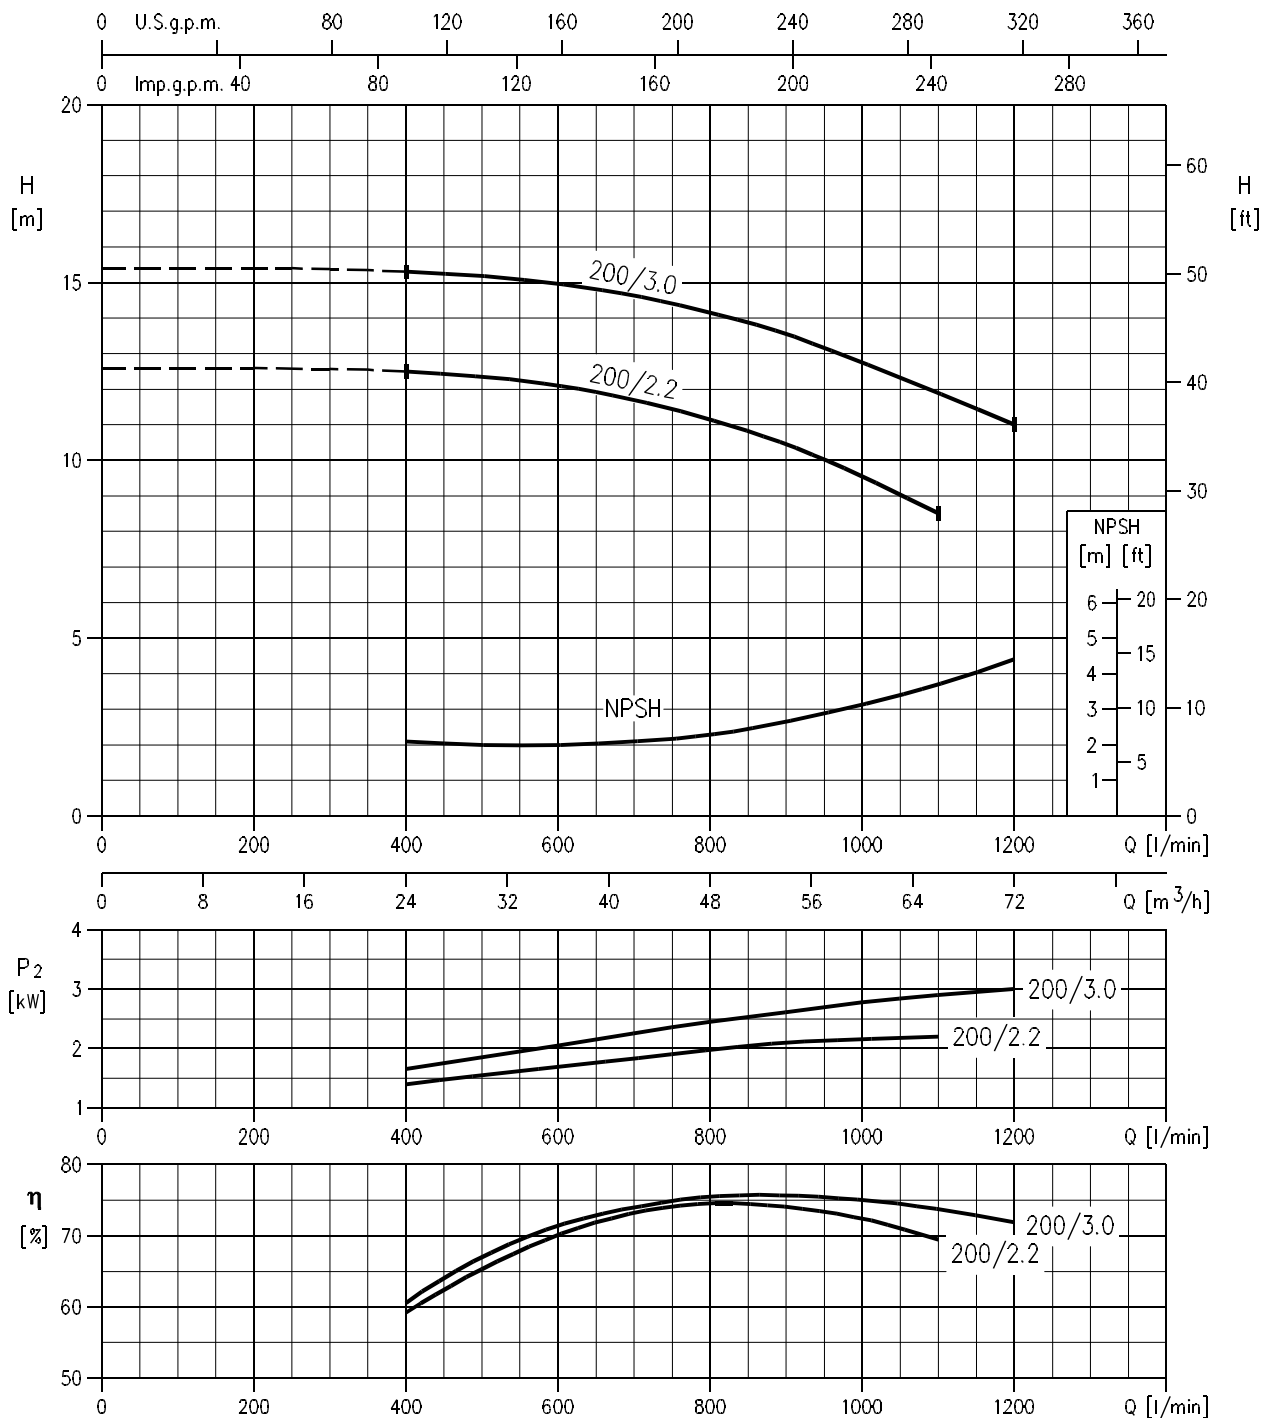

Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

LPC4 80-250/4.0 (4.0 kW) MEI > 0.40 Impeller diameter = 245 mm


LPC4 80-250/5.5 (5.5 kW) MEI > 0.40 Impeller diameter = 259 mm

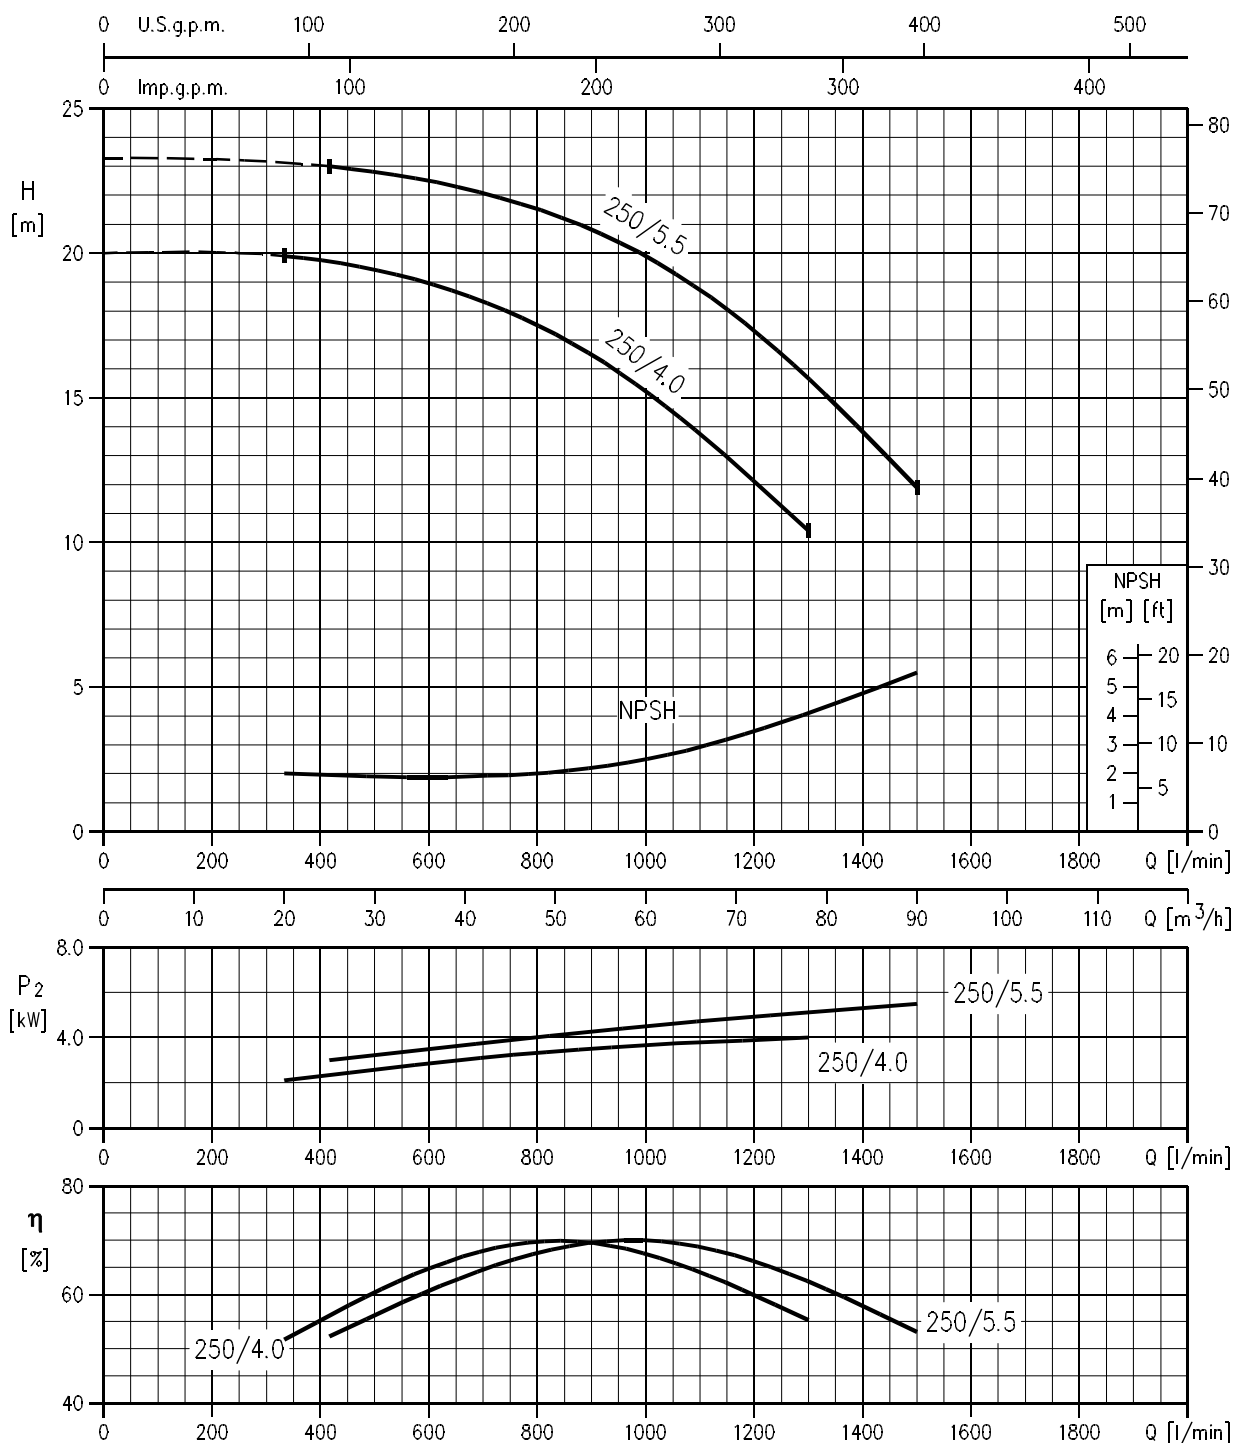

Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

LPC4 100-160/1.5 (1.5 kW) MEI > 0.40 Impeller diameter = 155 mm


LPC4 100-160/2.2 (2.2 kW) MEI > 0.40 Impeller diameter = 169 mm

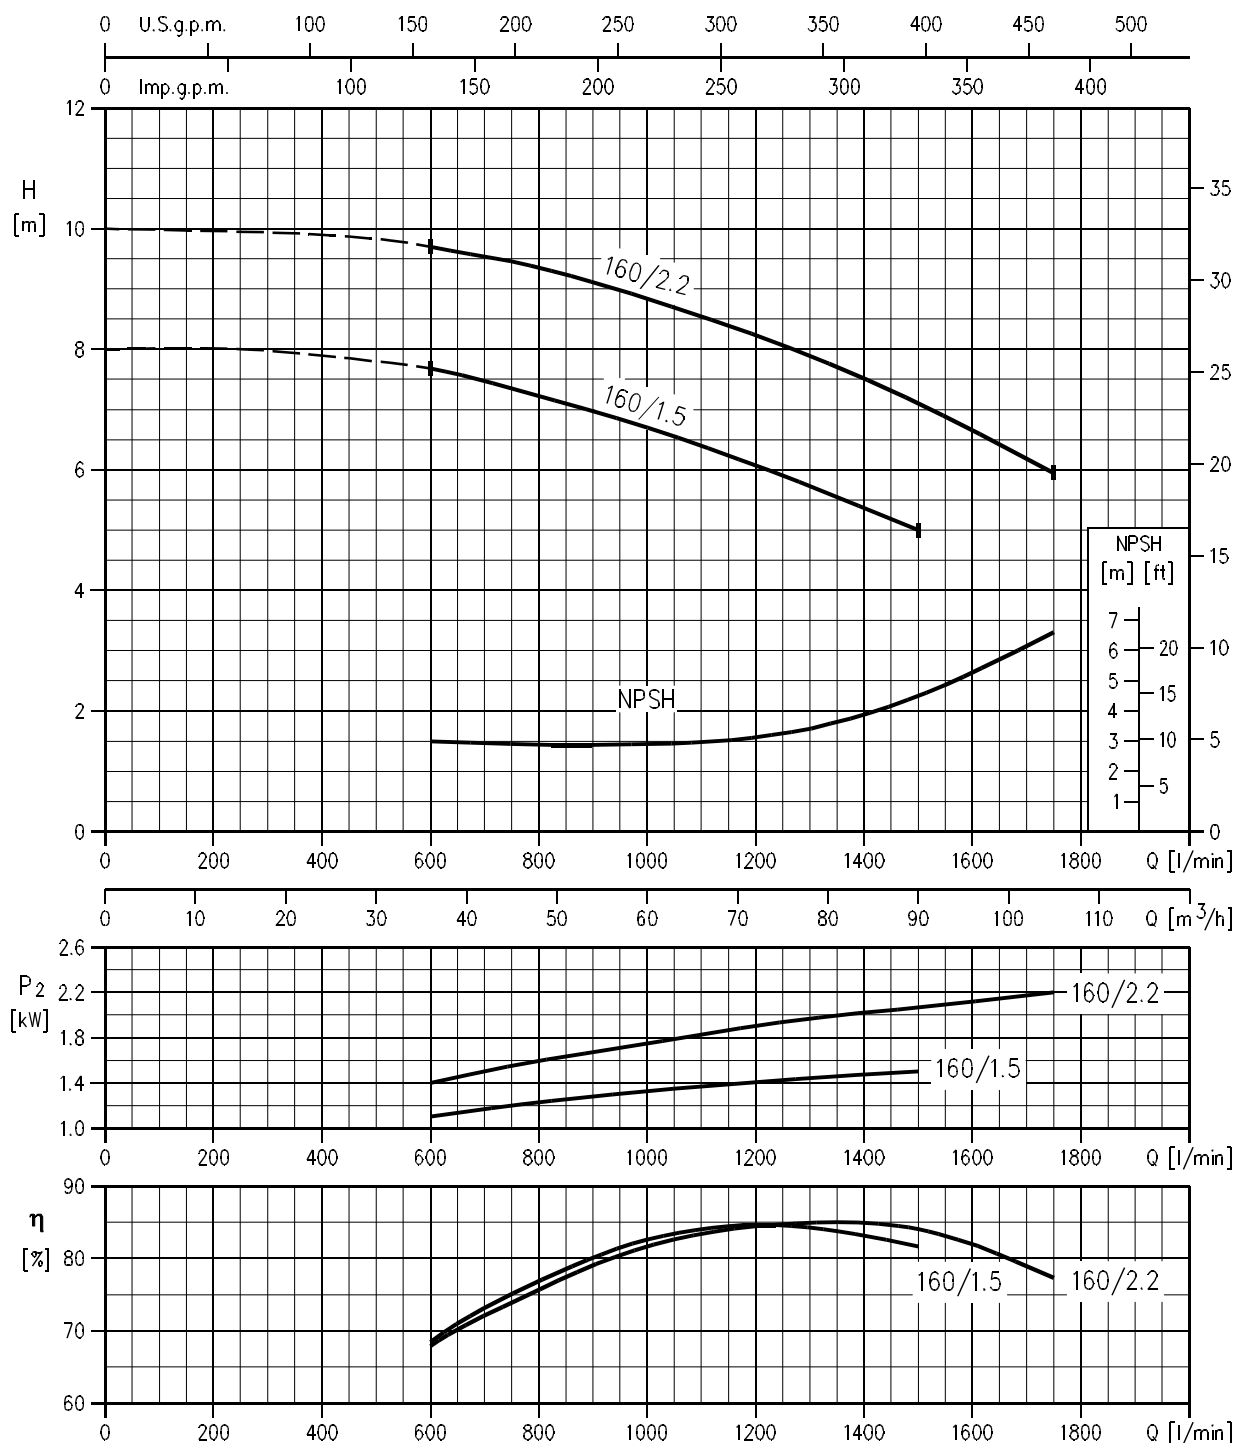Rotation speed $\approx 1400 \text{ min}^{-1}$

Test standard: ISO 9906 – Annex A

LPC4 100-200/3.0 (3.0 kW) MEI > 0.40 Impeller diameter = 200 mm

LPC4 100-200/4.0 (4.0 kW) MEI > 0.40 Impeller diameter = 209 mm

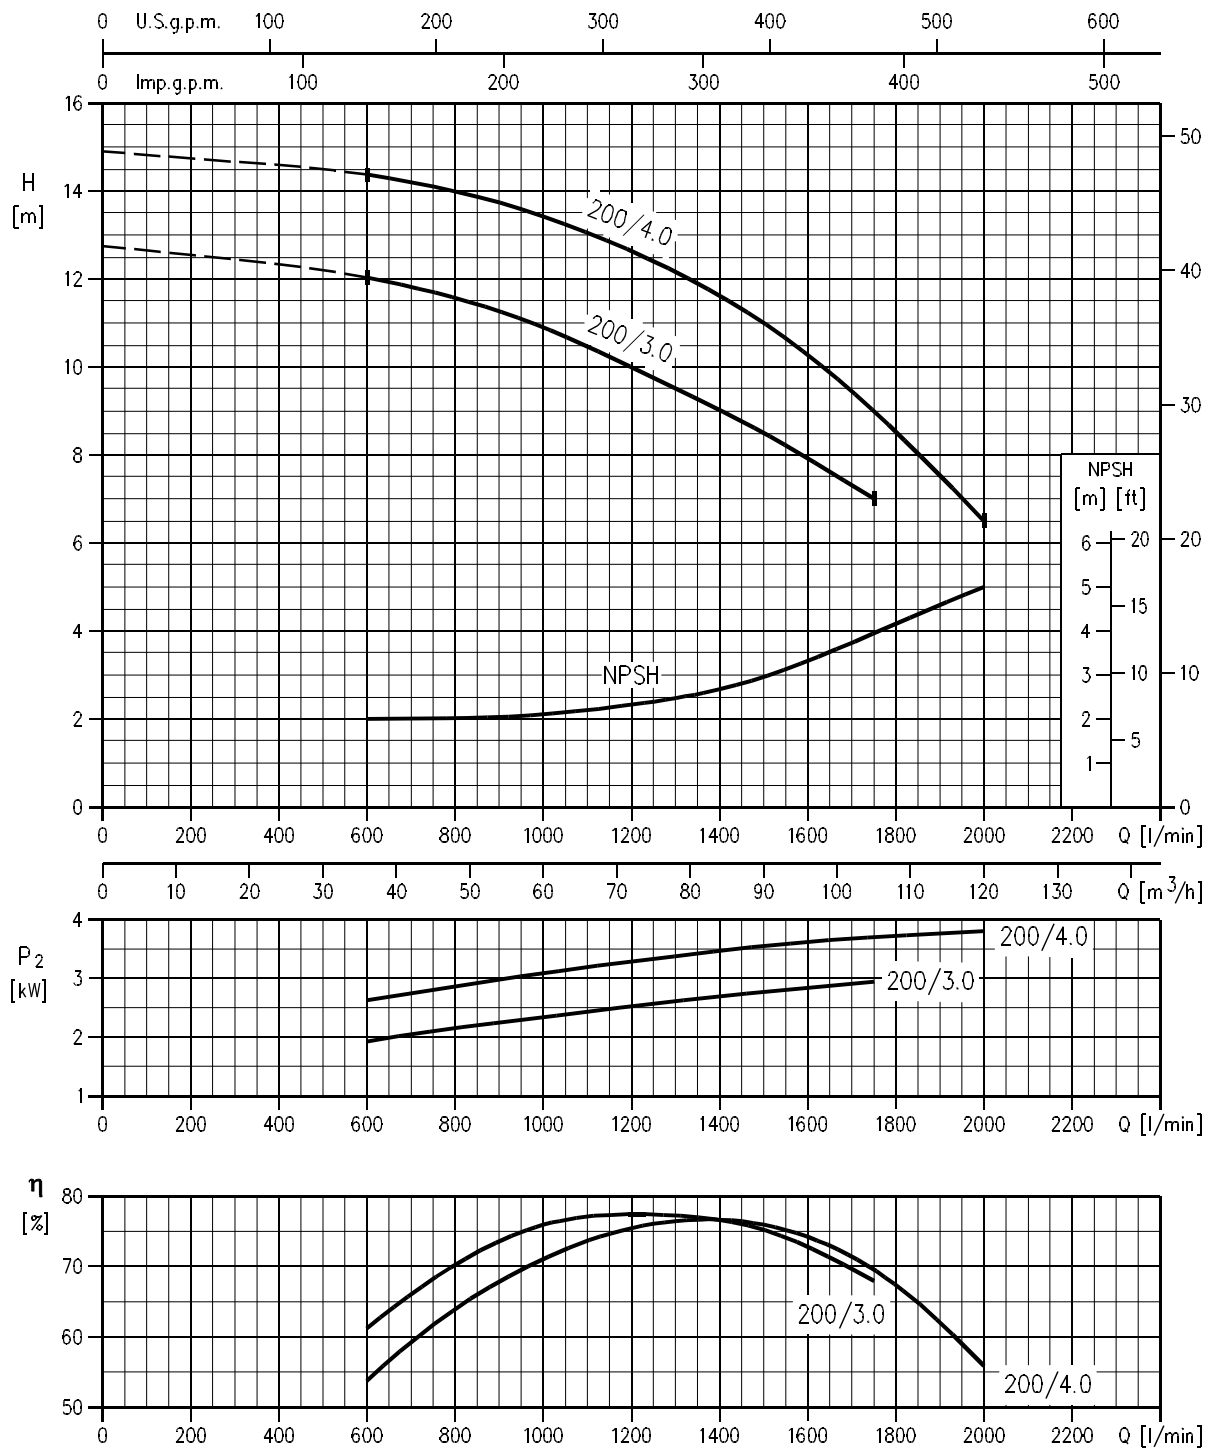

Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A


PERFORMANCE CURVE

50Hz

Rev. A

LPC4 100-250/5.5 (5.5 kW) MEI > 0.40 Impeller diameter = 240 mm

LPC4 100-250/7.5 (7.5 kW) MEI > 0.40 Impeller diameter = 259 mm

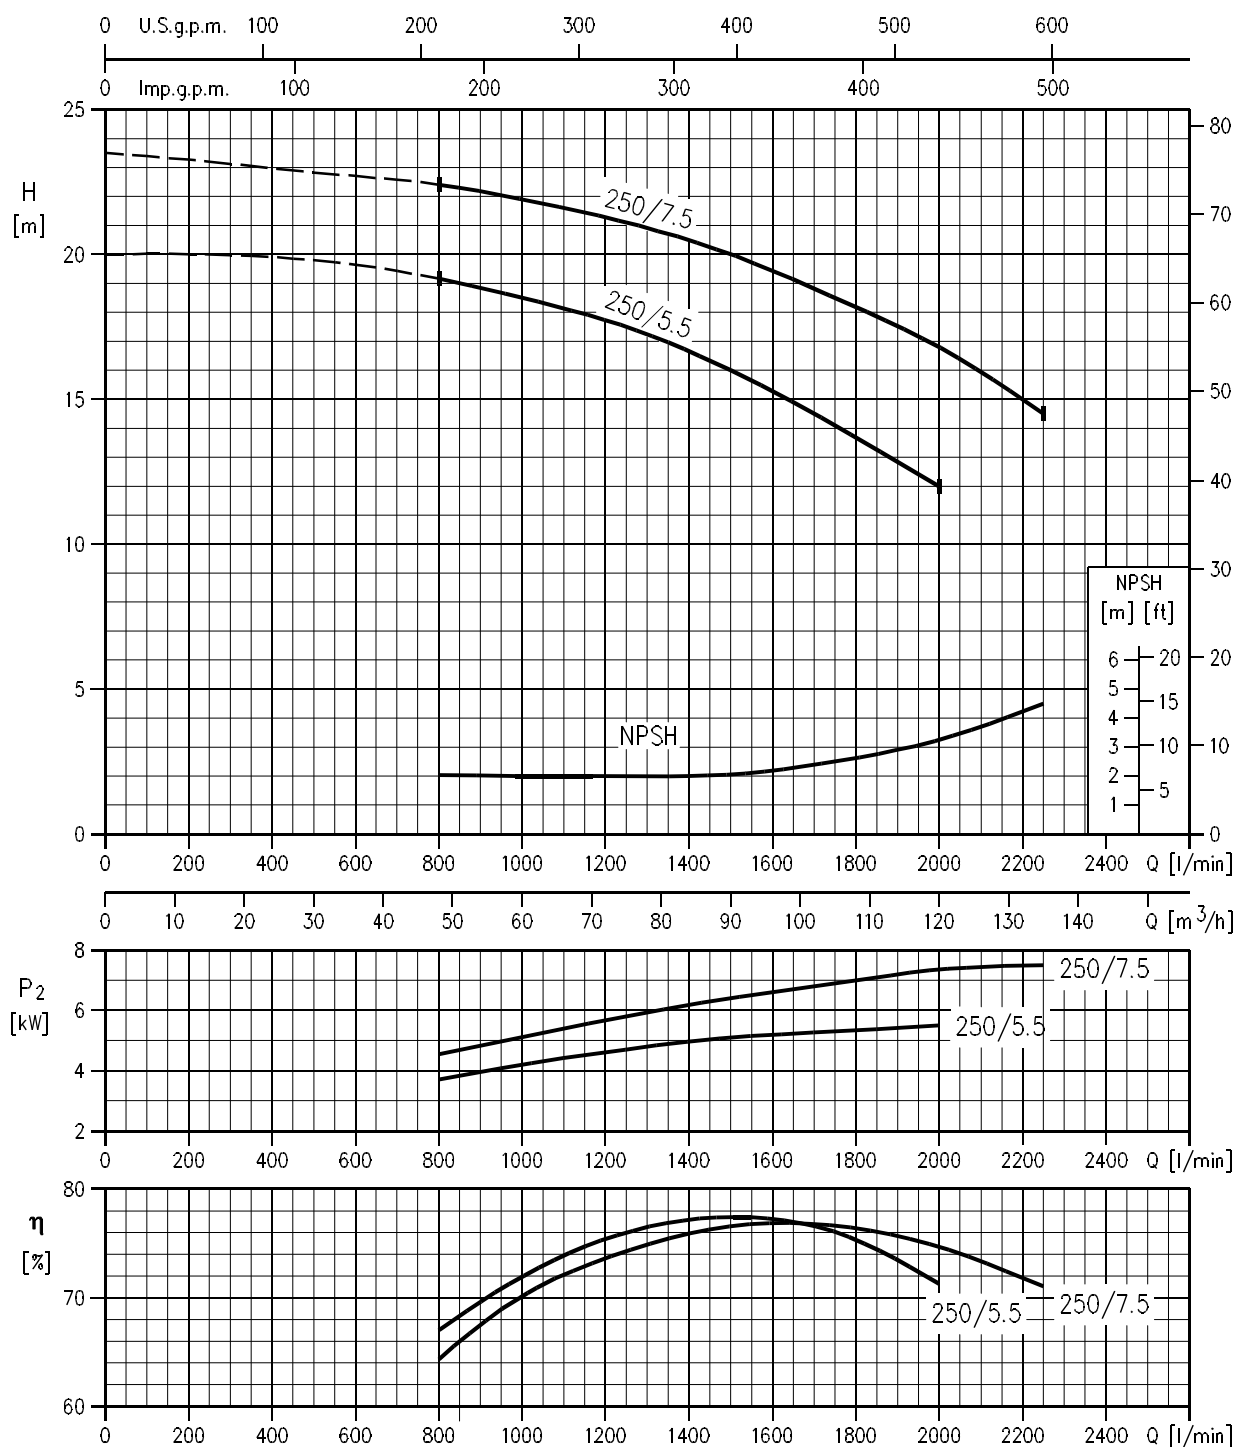

Rotation speed $\approx 1400 \text{ min}^{-1}$
 Test standard: ISO 9906 – Annex A

PERFORMANCE CURVE

50Hz


Rev. A

LPC4 125-250/5.5R (5.5 kW) MEI > 0.40 Impeller diameter = 198 mm

LPC4 125-250/5.5 (5.5 kW) MEI > 0.40 Impeller diameter = 217 mm


LPC4 125-250/7.5 (7.5 kW) MEI > 0.40 Impeller diameter = 242 mm

LPC4 125-250/11 (11 kW) MEI > 0.40 Impeller diameter = 259 mm

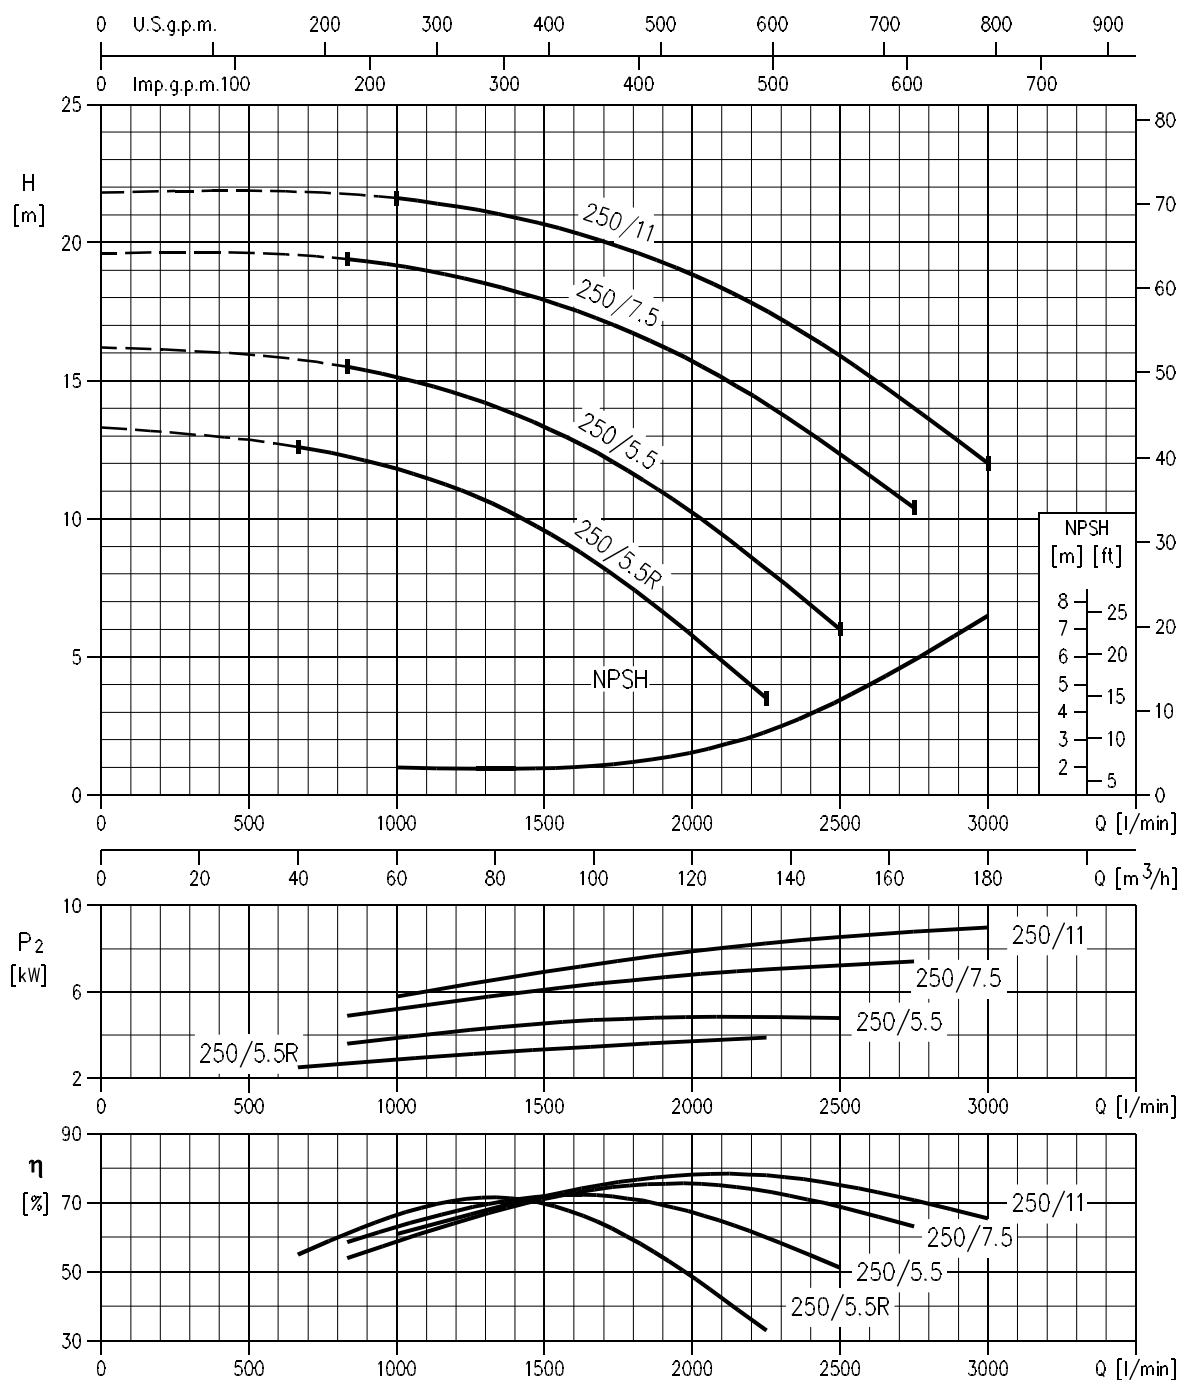


Rotation speed ≈ 1400 min⁻¹
 Test standard: ISO 9906 – Annex A

SECTIONAL VIEW DRAWING

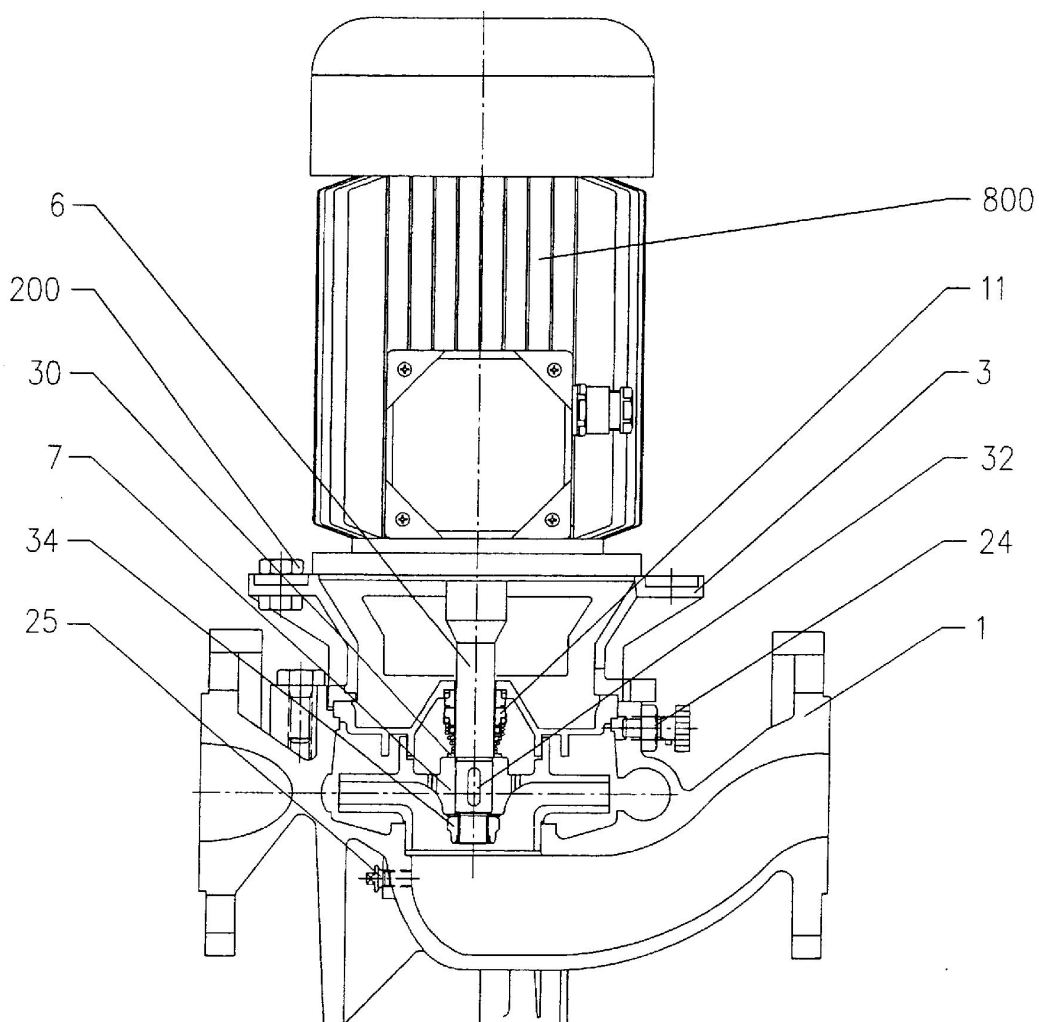

N°	PART NAME	MATERIAL
1	Casing	Cast Iron
3	Motor bracket	Cast Iron
6	Shaft with rotor	AISI 420
7	Impeller	Cast Iron
11	Mechanical seal	Carbon/SiC/EPDM
24	Priming plug	Stainless Steel
25	Drain plug	Stainless Steel
30	Spacer	Stainless steel
32	Key	Stainless steel
34	Impeller nut	Stainless steel
200	Screw	Stainless steel
800	Motor frame with stator	Alluminum

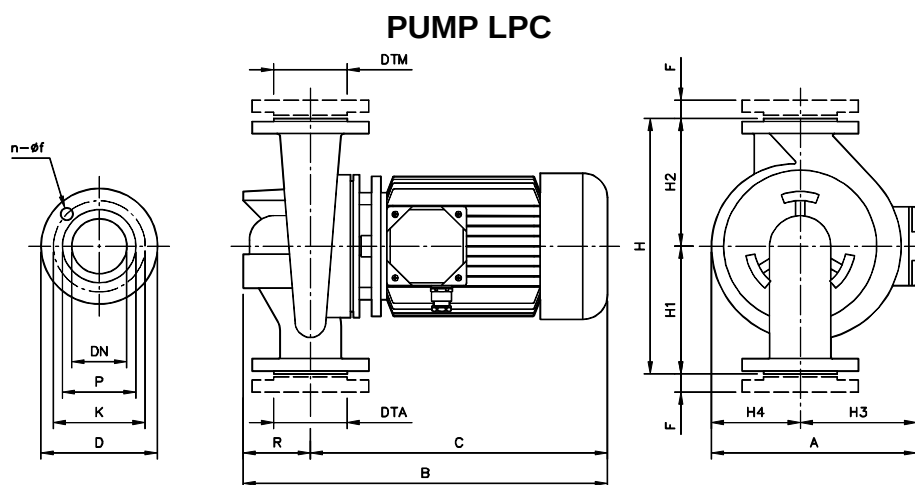

three phase	DTA/M	DNA/M	n	f	P	K	D	H	H1	H2	H3	H4	R	F	A	B	C	Weight (kgf)
LPC4 32-100/0,25	G 1 1/4	32PN10	4	14	70	90	120	220	110	110	112	65	65	16	177	379	314	12
LPC4 40-100/0,25	G 1 1/2	40PN10	4	14	80	100	130	260	140	120	112	77	90	16	189	407	317	16
LPC4 40-125/0,25R	G 1 1/2	40PN16	4	18	88	110	150	300	160	140	112	93	100	20	205	429	329	20
LPC4 40-125/0,25	G 1 1/2	40PN16	4	18	88	110	150	300	160	140	112	93	100	20	205	429	329	20
LPC4 40-160/0,37	G 1 1/2	40PN16	4	18	88	110	150	320	170	150	112	108	100	20	220	429	329	23
LPC4 40-200/0,75	G 1 1/2	40PN16	4	18	88	110	150	380	200	180	139	127	100	20	266	446	346	32
LPC4 40-200/1,1	G 1 1/2	40PN16	4	18	88	110	150	380	200	180	148	127	100	20	275	481	381	37
LPC4 40-250/1,1	G 1 1/2	40PN16	4	18	88	110	150	440	230	210	148	165	100	20	313	481	381	52
LPC4 40-250/1,5	G 1 1/2	40PN16	4	18	88	110	150	440	230	210	148	165	100	20	313	481	381	55
LPC4 50-125/0,25	G 2	50PN16	4	18	102	125	165	322	182	140	112	103	110	22	215	439	329	21
LPC4 50-125/0,37	G 2	50PN16	4	18	102	125	165	322	182	140	112	103	110	22	215	439	329	22
LPC4 50-160/0,55	G 2	50PN16	4	18	102	125	165	340	180	160	112	113	110	22	225	439	329	25
LPC4 50-200/1,1R	G 2	50PN16	4	18	102	125	165	400	220	180	148	131	110	22	279	491	381	40
LPC4 50-200/1,1	G 2	50PN16	4	18	102	125	165	400	220	180	148	131	110	22	279	491	381	40
LPC4 50-250/1,5	G 2	50PN16	4	18	102	125	165	440	230	210	148	165	125	22	313	506	381	53
LPC4 50-250/2,2	G 2	50PN16	4	18	102	125	165	440	230	210	155	165	125	22	320	545	420	57
LPC4 65-125/0,37	G 2 1/2	65PN16	4	18	122	145	185	360	205	155	112	108	140	22	220	469	329	25
LPC4 65-125/0,55	G 2 1/2	65PN16	4	18	122	145	185	360	205	155	112	108	140	22	220	469	329	26
LPC4 65-160/0,75	G 2 1/2	65PN16	4	18	122	145	185	400	220	180	139	122	140	22	261	486	346	34
LPC4 65-160/1,1	G 2 1/2	65PN16	4	18	122	145	185	400	220	180	148	122	140	22	270	521	381	39
LPC4 65-200/1,1	G 2 1/2	65PN16	4	18	122	145	185	440	240	200	148	136	140	22	284	521	381	41
LPC4 65-200/1,5	G 2 1/2	65PN16	4	18	122	145	185	440	240	200	148	136	140	22	284	521	381	42
LPC4 65-250/2,2	G 2 1/2	65PN16	4	18	122	145	185	475	250	225	155	165	140	22	320	560	420	67
LPC4 65-250/3	G 2 1/2	65PN16	4	18	122	145	185	475	250	225	155	165	140	22	320	594	454	68
LPC4 80-160/0,75	G 3	80PN16	8	18	138	160	200	440	240	200	139	131	160	24	270	506	346	51
LPC4 80-160/1,1R	G 3	80PN16	8	18	138	160	200	440	240	200	148	131	160	24	279	541	381	57
LPC4 80-160/1,1	G 3	80PN16	8	18	138	160	200	440	240	200	148	131	160	24	279	541	381	41
LPC4 80-160/1,5	G 3	80PN16	8	18	138	160	200	440	240	200	148	131	160	24	279	541	381	42
LPC4 80-200/2,2	G 3	80PN16	8	18	138	160	200	500	275	225	155	146	160	24	301	580	420	52
LPC4 80-200/3	G 3	80PN16	8	18	138	160	200	500	275	225	155	146	160	24	301	614	454	59
LPC4 80-250/4	G 3	80PN16	8	18	138	160	200	530	280	250	171	168	160	24	339	614	454	83
LPC4 80-250/5,5	G 3	80PN16	8	18	138	160	200	530	280	250	195	168	160	24	363	651	491	107
LPC4 100-160/1,5	G 4	100PN16	8	18	158	180	220	525	300	225	148	136	190	26	284	571	381	46
LPC4 100-160/2,2	G 4	100PN16	8	18	158	180	220	525	300	225	155	136	190	26	291	610	420	51
LPC4 100-200/3	G 4	100PN16	8	18	158	180	220	550	300	250	155	156	190	26	311	656	468	68
LPC4 100-200/4	G 4	100PN16	8	18	158	180	220	550	300	250	171	156	190	26	327	644	454	72
LPC4 100-250/5,5	G 4	100PN16	8	18	158	180	220	600	320	280	195	176	190	26	371	701	511	109
LPC4 100-250/7,5	G 4	100PN16	8	18	158	180	220	600	320	280	195	176	190	26	371	741	551	119
LPC4 125-250/5,5R	G 5	125PN16	8	18	188	210	250	620	340	280	195	195	195	26	390	706	511	145
LPC4 125-250/5,5	G 5	125PN16	8	18	188	210	250	620	340	280	195	195	195	26	390	706	511	145
LPC4 125-250/7,5	G 5	125PN16	8	18	188	210	250	620	340	280	195	195	195	26	390	746	551	148
LPC4 125-250/11	G 5	125PN16	8	18	188	210	250	620	340	280	238	195	195	26	433	861	666	188
LPC4 150-250/7,5	G 6	150PN16	8	22	212	240	285	700	370	330	195	210	220	28	405	802	582	167
LPC4 150-250/11R	G 6	150PN16	8	22	212	240	285	700	370	330	195	210	220	28	405	895	675	196
LPC4 150-250/11	G 6	150PN16	8	22	212	240	285	700	370	330	195	210	220	28	405	895	675	208
LPC4 150-250/15R	G 6	150PN16	8	22	212	240	285	700	370	330	238	210	220	28	448	939	719	227
LPC4 150-250/15	G 6	150PN16	8	22	212	240	285	700	370	330	238	210	220	28	448	939	719	227

TECHNICAL DATA

50Hz

Rev. A

MOTOR DATA

Pump type Three Phase	Power		Efficiency	Input [kW]	Efficiency (% load) and power-factor				Full load current [A]			Locked rotor current [A]		
	[kW]	[HP]			η %			cos-φ	230 V	400 V	690 V	230 V	400 V	690 V
					50%	75%	100%							
LPC4 32-100/0,25	0,25	0,33	-	0,41	-	-	-	-	1,6	0,9	-	5,0	2,9	-
LPC4 40-100/0,25	0,25	0,33	-	0,41	-	-	-	-	1,6	0,9	-	5,0	2,9	-
LPC4 40-125/0,25R	0,25	0,33	-	0,41	-	-	-	-	1,6	0,9	-	5,0	2,9	-
LPC4 40-125/0,25	0,25	0,33	-	0,41	-	-	-	-	1,6	0,9	-	5,0	2,9	-
LPC4 40-160/0,37	0,37	0,5	-	0,56	-	-	-	-	2,1	1,2	-	6,9	4,0	-
LPC4 40-200/0,75	0,75	1,0	IE2	0,93	75,0	78,1	79,4	0,71	3,3	1,9	-	17,1	9,8	-
LPC4 40-200/1,1	1,1	1,5	IE2	1,33	81,4	82,7	82,5	0,77	4,3	2,5	-	26,4	15,3	-
LPC4 40-250/1,1	1,1	1,5	IE2	1,33	81,4	82,7	82,5	0,77	4,3	2,5	-	26,4	15,3	-
LPC4 40-250/1,5	1,5	2	IE2	1,81	81,0	83,5	83,0	0,77	5,9	3,4	-	46,5	26,8	-
LPC4 50-125/0,25	0,25	0,33	-	0,41	-	-	-	-	1,6	0,9	-	5,0	2,9	-
LPC4 50-125/0,37	0,37	0,5	-	0,56	-	-	-	-	2,1	1,2	-	6,9	4,0	-
LPC4 50-160/0,55	0,55	0,75	-	0,80	-	-	-	-	2,8	1,6	-	10,0	5,7	-
LPC4 50-200/1,1R	1,1	1,5	IE2	1,33	81,4	82,7	82,5	0,77	4,3	2,5	-	26,4	15,3	-
LPC4 50-200/1,1	1,1	1,5	IE2	1,33	81,4	82,7	82,5	0,77	4,3	2,5	-	26,4	15,3	-
LPC4 50-250/1,5	1,5	2	IE2	1,81	81,0	83,5	83,0	0,77	5,9	3,4	-	46,5	26,8	-
LPC4 50-250/2,2	2,2	3	IE2	2,61	84,0	85,3	85,1	0,74	8,9	5,1	-	53,0	30,6	-
LPC4 65-125/0,37	0,37	0,5	-	0,56	-	-	-	-	2,1	1,2	-	6,9	4,0	-
LPC4 65-125/0,55	0,55	0,75	-	0,80	-	-	-	-	2,8	1,6	-	10,0	5,7	-
LPC4 65-160/0,75	0,75	1,0	IE2	0,93	75,0	78,1	79,4	0,71	3,3	1,9	-	17,1	9,8	-
LPC4 65-160/1,1	1,1	1,5	IE2	1,33	81,4	82,7	82,5	0,77	4,3	2,5	-	26,4	15,3	-
LPC4 65-200/1,1	1,1	1,5	IE2	1,33	81,4	82,7	82,5	0,77	4,3	2,5	-	26,4	15,3	-
LPC4 65-200/1,5	1,5	2	IE2	1,81	81,0	83,5	83,0	0,77	5,9	3,4	-	46,5	26,8	-
LPC4 65-250/2,2	2,2	3	IE2	2,61	84,0	85,3	85,1	0,74	8,9	5,1	-	53,0	30,6	-
LPC4 65-250/3	3	4	IE2	3,47	82,6	84,7	86,4	0,77	11,3	6,5	-	95,7	55,3	-
LPC4 80-160/0,75	0,75	1,0	IE2	0,93	75,0	78,1	79,4	0,71	3,3	1,9	-	17,1	9,8	-
LPC4 80-160/1,1R	1,1	1,5	IE2	1,33	81,4	82,7	82,5	0,77	4,3	2,5	-	26,4	15,3	-
LPC4 80-160/1,1	1,1	1,5	IE2	1,33	81,4	82,7	82,5	0,77	4,3	2,5	-	26,4	15,3	-
LPC4 80-160/1,5	1,5	2	IE2	1,81	81,0	83,5	83,0	0,77	5,9	3,4	-	46,5	26,8	-
LPC4 80-200/2,2	2,2	3	IE2	2,61	84,0	85,3	85,1	0,74	8,9	5,1	-	53,0	30,6	-
LPC4 80-200/3	3	4	IE2	3,47	82,6	84,7	86,4	0,77	11,3	6,5	-	95,7	55,3	-
LPC4 80-250/4	4	5,5	IE2	4,59	86,0	87,3	87,1	0,78	14,8	8,5	-	89,7	51,8	-
LPC4 80-250/5,5	5,5	7,5	IE2	6,16	87,5	88,3	88,1	0,78	-	11,4	6,6	-	84,4	48,7
LPC4 100-160/1,5	1,5	2	IE2	1,81	81,0	83,5	83,0	0,77	5,9	3,4	-	46,5	26,8	-
LPC4 100-160/2,2	2,2	3	IE2	2,61	84,0	85,3	85,1	0,74	8,9	5,1	-	53,0	30,6	-
LPC4 100-200/3	3	4	IE2	3,47	82,6	84,7	86,4	0,77	11,3	6,5	-	95,7	55,3	-
LPC4 100-200/4	4	5,5	IE2	4,59	86,0	87,3	87,1	0,78	14,8	8,5	-	89,7	51,8	-
LPC4 100-250/5,5	5,5	7,5	IE2	6,16	87,5	88,3	88,1	0,78	-	11,4	6,6	-	84,4	48,7
LPC4 100-250/7,5	7,5	10	IE3	8,41	88,5	89,4	89,2	0,74	-	16,4	9,5	-	121,4	70,1
LPC4125-250/5,5R	5,5	7,5	IE2	6,16	87,5	88,3	88,1	0,78	-	11,4	6,6	-	84,4	48,7
LPC4 125-250/5,5	5,5	7,5	IE2	6,16	87,5	88,3	88,1	0,78	-	11,4	6,6	-	84,4	48,7
LPC4 125-250/7,5	7,5	10	IE3	8,41	88,5	89,4	89,2	0,74	-	16,4	9,5	-	121,4	70,1
LPC4 125-250/11	11	15	IE3	12,49	89,4	90,3	90,1	0,82	-	22,0	12,7	-	173,8	100,3
LPC4 150-250/7,5	7,5	10	IE3	8,41	88,5	89,4	89,2	0,74	-	16,4	9,5	-	121,4	70,1
LPC4 150-250/11R	11	15	IE3	12,49	89,4	90,3	90,1	0,82	-	22,0	12,7	-	173,8	100,3
LPC4 150-250/11	11	15	IE3	12,49	89,4	90,3	90,1	0,82	-	22,0	12,7	-	173,8	100,3
LPC4 150-250/15R	15	20	IE3	16,87	90,6	91,2	91,0	0,84	-	29,0	16,7	-	214,6	123,9
LPC4 150-250/15	15	20	IE3	16,87	90,6	91,2	91,0	0,84	-	29,0	16,7	-	214,6	123,9