



FADAK PUMP

Submersible Drainage Pump



SAETY TIPS	TECHNICAL INFORMATION	MATERIAL	USES
------------	-----------------------	----------	------

- ★ Filling the pump with water before starting the engine from correct place
- ★ Make absolutely sure of the correct voltage
- ★ Please refer to a specialist for installation

- ★ Engine cooling : clear water
- ★ Voltage : 380/400 volts
- ★ Frequency : 50 Hz
- ★ Engine speed : 2900 rpm

- ★ Complete pump : cast iron anti-wear
- ★ Body pump : steel
- ★ Upper and lower motor bearings : steel and bronze, steel and graphite
- ★ Round floor systems : graphite and steel

- ★ For industrial and agricultural
- ★ For use and water transfer
- ★ For use in fountains and water front

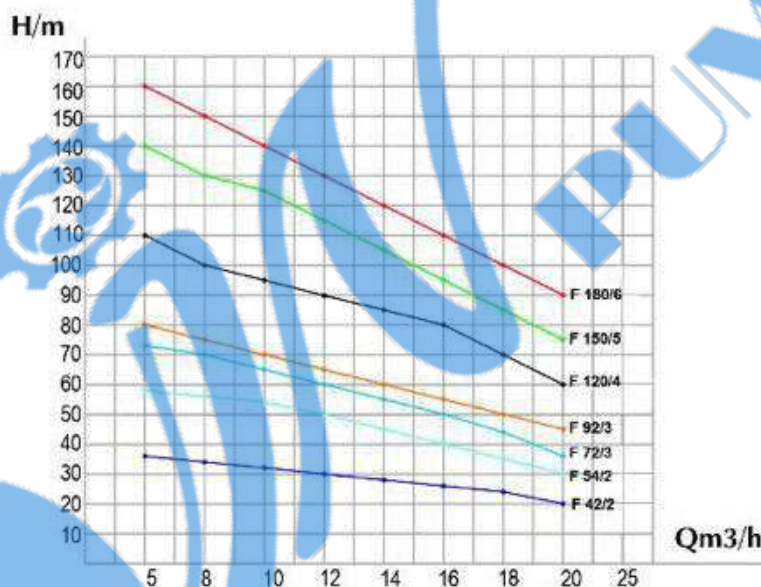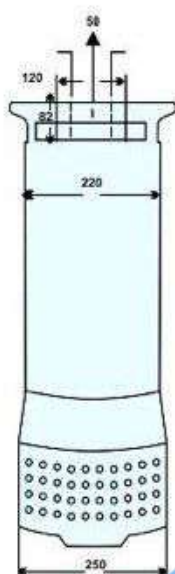

Technical Table

Pump Type 380 V 50 HZ	Litr/s m ³ /h	Total height in terms of meter								Q=Discharge Q=Discharge	power KW	Flow A	Well Diam- eter in	Pipe Diam- eter in	Weight kg
		5.5	5	4.4	3.8	3.3	2.7	2.2	1.38						
F 42/1	20	24	26	28	30	32	34	36		3/7	9	12	2	64	
F 54/2	30	35	40	45	50	54	56	58		5/5	11/5	12	2	73	
F 72/3	35	45	50	55	60	65	70	72		7/5	17	12	2	85	
F 92/3	45	50	55	60	65	70	75	80		9/2	21/5	12	2	86	
F 120/4	60	70	80	85	90	95	100	110		11	25	12	2	93	
F 150/5	75	85	95	105	115	125	130	140		13	28	12	2	109	
F 180/6	90	100	110	120	130	140	150	160		15	32	12	2	125	

2 inch

FADAK PUMP

💧 F 42/2
 💧 F 54/2
 💧 F 72/3
 💧 F 92/3
 💧 F 120/4
 💧 F 150/5
 💧 F 180/6

FADAK PUMP

Submersible Drainage Pump

SAETY TIPS

- ★ Filling the pump with water before starting the engine from correct place
- ★ Make absolutely sure of the correct voltage
- ★ Please refer to a specialist for installation

TECHNICAL INFORMATION



- ★ Engine speed : 2900 rpm
- ★ Voltage : 380/400 volts
- ★ Frequency : 50 Hz
- ★ Engine speed : 2900 rpm

MATERIAL

- ★ Complete pump : cast iron anti-wear
- ★ Body pump : steel
- ★ Upper and lower motor bearings : steel and bronze, steel and graphite
- ★ Round floor systems : graphite and steel

USES

- ★ For industrial and agricultural
- ★ For use and water transfer
- ★ For use in fountains and water front

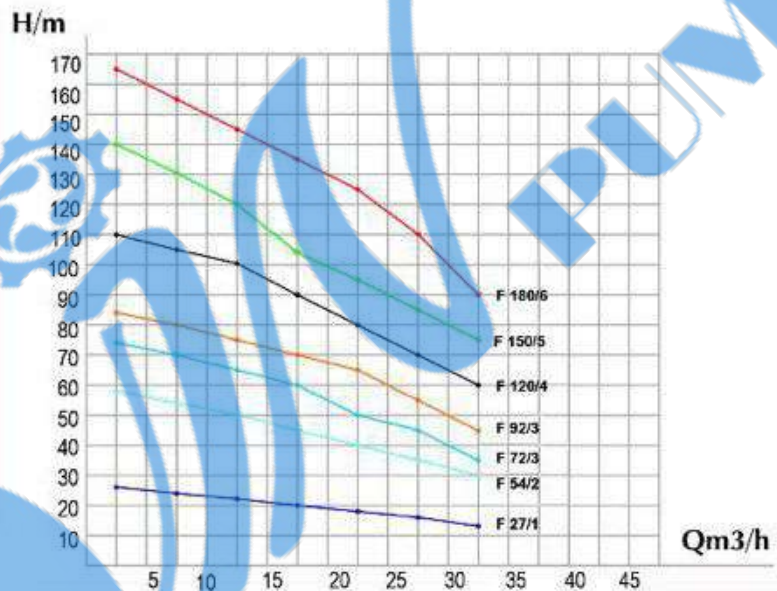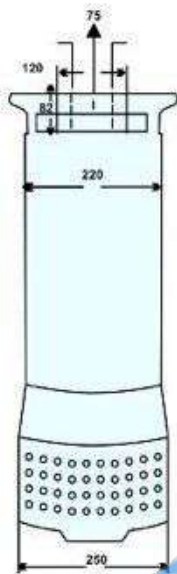

Technical Table

Pump Type 380 V 50 HZ	Litr/s m ³ /h	Total height in terms of meter								Q=Discharge Q=Discharge	power KW	Flow A	Well Diam- eter in	Pipe Diam- eter in	Weight kg
		9/72	8/33	6/94	5/55	4/16	2/77	1/38	5						
F 27/1	35	13	16	18	20	22	25	26		3/7	9	12	3	56	
F 54/2	35	30	35	40	45	50	54	58		7/5	17	12	3	72	
F 72/3	35	45	50	60	65	70	74			9/2	21/5	12	3	84	
F 92/3	45	55	65	70	75	80	84			11	25	12	3	85	
F 120/4	60	70	80	90	100	105	110			13	28	12	3	102	
F 150/5	75	85	95	105	120	130	140			15	32	12	3	118	
F 180/6	90	110	125	135	145	155	165			18/5	38	12	3	142	

3 inch

FADAK PUMP

💧 F 27/1
 💧 F 54/2
 💧 F 72/3
 💧 F 92/3
 💧 F 120/4
 💧 F 150/5
 💧 F 180/6



FADAK PUMP

Submersible Drainage Pump

SAETY TIPS

- Filling the pump with water before starting the engine from correct place
- Make absolutely sure of the correct voltage
- Please refer to a specialist for installation

TECHNICAL INFORMATION



- Engine cooling : clear water
- Voltage : 380/400 volts
- Frequency : 50 Hz
- Engine speed : 2900 rpm

MATERIAL

- Complete pump : cast iron anti-wear
- Body pump : steel
- Upper and lower motor bearings : steel and bronze, steel and graphite
- Round floor systems : graphite and steel

USES

- For industrial and agricultural
- For use and water transfer
- For use in fountains and water front

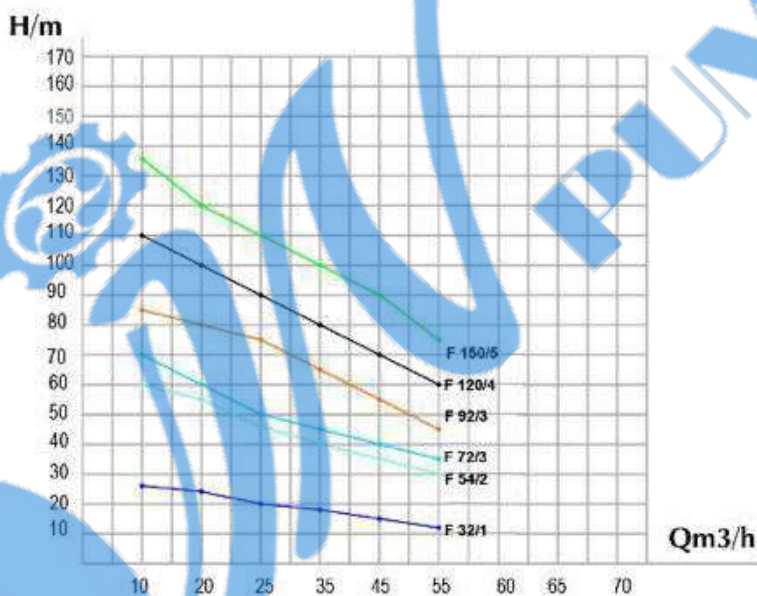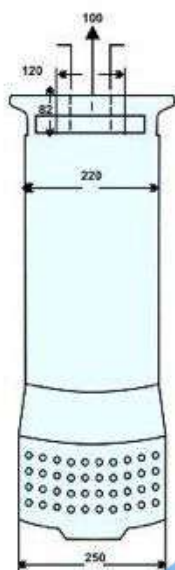

Technical Table

Pump Type	Litrs m ³ /h	Total height in terms of meter						Q=Discharge	power KW	Flow A	Well Diam- eter in	Pipe Diam- eter in	Weight kg
		15/27	12/5	9/72	6/94	5/55	2/77						
F 32/1	55	12	15	18	20	24	26	10	5/5	11/5	12	4	65
F 54/2	77	30	35	40	45	55	60	10	9/2	21/5	12	4	77
F 72/3	84	35	40	45	50	60	70	10	11	25	12	4	84
F 92/3	96	45	55	65	75	80	85	10	13	28	12	4	96
F 120/4	110	60	70	80	90	100	110	10	15	32	12	4	110
F 150/5	135	75	90	100	110	120	135	10	18/5	38	12	4	135

4 inch

FADAK PUMP

• F 32/1 • F 54/2 • F 72/3 • F 92/3 • F 120/4 • F 150/5



FADAK PUMP

Submersible Drainage Pump

SAETY TIPS

- ★ Filling the pump with water before starting the engine from correct place
- ★ Make absolutely sure of the correct voltage
- ★ Please refer to a specialist for installation

TECHNICAL INFORMATION



- ★ Engine cooling : clear water
- ★ Voltage : 380/400 volts
- ★ Frequency : 50 Hz
- ★ Engine speed : 2900 rpm

MATERIAL

- ★ Complete pump : cast iron anti-wear
- ★ Body pump : steel
- ★ Upper and lower motor bearings : steel and bronze, steel and graphite
- ★ Round floor systems : graphite and steel

USES

- ★ For industrial and agricultural
- ★ For use and water transfer
- ★ For use in fountains and water front

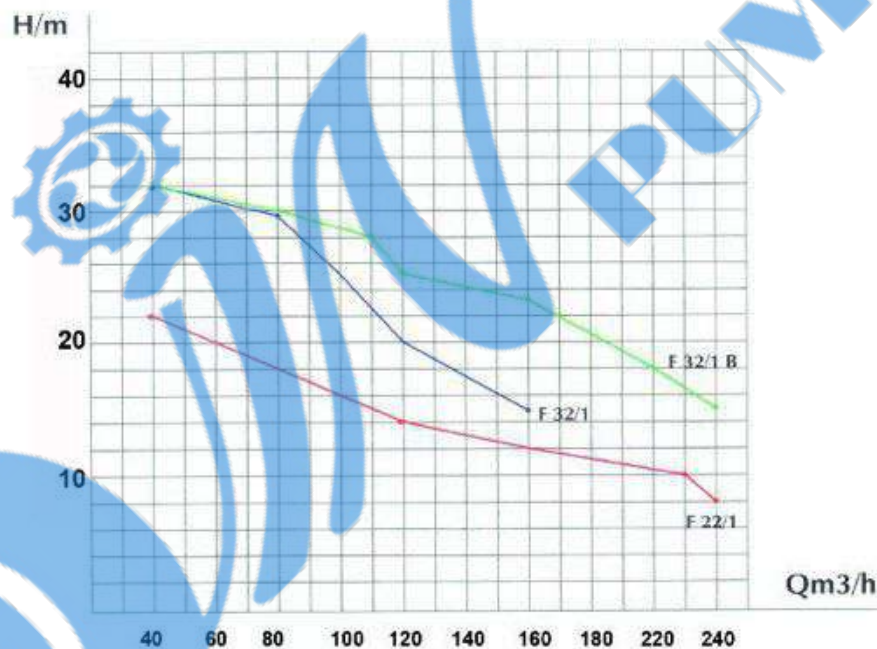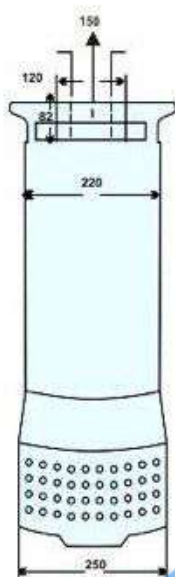

Technical Table

Pump Type 380 V 50 HZ	Litrs m ³ /h	66/6	61/1	44/4	33/3	27/7	22/2	11/1	Q=Discharge	power KW	Flow A	Well Diam- eter in	Pipe Diam- eter in	Weight kg
		240	220	160	120	100	80	40						
F 22/1		8	10	12	14	16	18	22		11	25	12	6	75
F 32/1		---	---	15	20	25	30	32		11	25	12	6	75
F 32/1B		15	18	23	25	28	30	32		15	32	12	6	92

6 inch

FADAK PUMP