

50 Hz - min⁻¹ ~ 2900

TIPO TYPE		Potenza nominale Nominal power		Potenza assorbita Input power [W]		Condensatore Capacitor 450 V max	Corrente assorbita Input current [A]			Portata - Capacity							
										Q [m ³ /h]	0	12	24	36	48	54	60
										Q [l/1']	0	200	400	600	800	900	1000
a	b	Kw	HP	a	b	[μF]	1~ 230 V	3~ 230 V	3~ 400 V	Prevalenza (m C.A.) - Total head (m W.C.)							
KF 150 M	KF 150 T	1,1	1,5	1940	1820	31,5	9,0	6	3,5	H	m	12	11,7	10,3	8	4,5	
										Efficiency	%	0	47	65	60,8	41,1	
										P1	Kw	0,7	1,3	1,7	1,9	1,9	
										NPSH	m		1,9	2,2	4,1	9,4	
KF 200 M	KF 200 T	1,5	2	2400	2340	36	11,5	7,2	4,2	H	m	14	13,8	12,5	10,5	7,5	5,2
										Efficiency	%	0	39,5	57,5	62,4	54,7	44
										P1	Kw	1	1,6	2	2,2	2,4	2,5
										NPSH	m		1,5	2,3	4,1	7,2	9,3
KF 300 M	KF 300 T	2,2	3	2950	3130	60	13,0	8,7	5	H	m	17,8	17	15,5	13	10	8
										Efficiency	%	0	39,4	64	72	64,3	55,6
										P1	Kw	1,1	1,7	2,3	2,6	2,9	3
										NPSH	m		1,8	2,4	4	6,8	8,8

a) ~Monofase 230 V


b) ~Trifase 230/400 V

60 Hz - min⁻¹ ~ 3400

TIPO TYPE		Potenza nominale Nominal power		Potenza assorbita Input power		Condensatore Capacitor 450 V max	Corrente assorbita Input current [A]			Portata - Capacity							
										Q [m ³ /h]	0	12	24	36	48	54	60
										Q [l/1']	0	200	400	600	800	900	1000
a	b	Kw	HP	a	b	[μF]	1~ 220 V	3~ 220 V	3~ 380 V	Prevalenza (m C.A.) - Total head (m W.C.)							
KF 150 M	KF 150 T	1,1	1,5	2250	2120	30	9,5	7	3,5	H	m	15,3	14,8	12,7	9,5	4,9	
										Efficiency	%	0	32,1	47,2	46,1	29,1	
										P1	Kw	1	1,4	1,8	2,1	2,3	
KF 200 M	KF 200 T	1,5	2	2520	2430	40	12,5	7,5	4,4	H	m	16,6	16,2	14,6	12,1	7,6	4
										Efficiency	%	0	31,4	48,2	49,3	35,9	22,9
										P1	Kw	1,1	1,7	2,4	2,6	2,4	2,1
KF 300 M	KF 300 T	2,2	3	2810	2790	50	14	9	4,9	H	m	18,5	18,1	16,6	13,4	9,3	6,7
										Efficiency	%	0	31,7	48,2	52	43,8	34,9
										P1	Kw	1,1	1,7	2,2	2,6	2,8	2,8

a) ~Monofase 220 V

b) ~Trifase 220/380 V

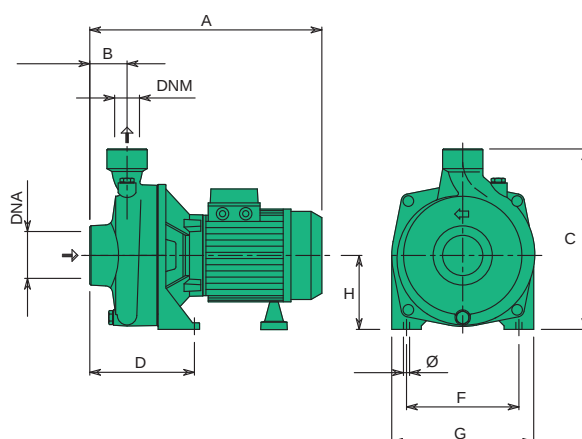

TIPO TYPE	DIMENSIONI [mm] DIMENSIONS [mm]										IMBALLO [mm] PACKING [mm]			PESO WEIGHT [kg]
	A	B	C	D	F	G	Ø	H	DNA	DNM	A	L	P	
KF 150	390	60	290	152	178	228	11	120	2"	2"	325	265	430	25,5
KF 200	390	60	290	152	178	228	11	120	2"	2"	325	265	430	26,5
KF 300	390	60	290	152	178	228	11	120	2"	2"	325	265	430	31