



95906480 UPS 25-100 180 50 Hz

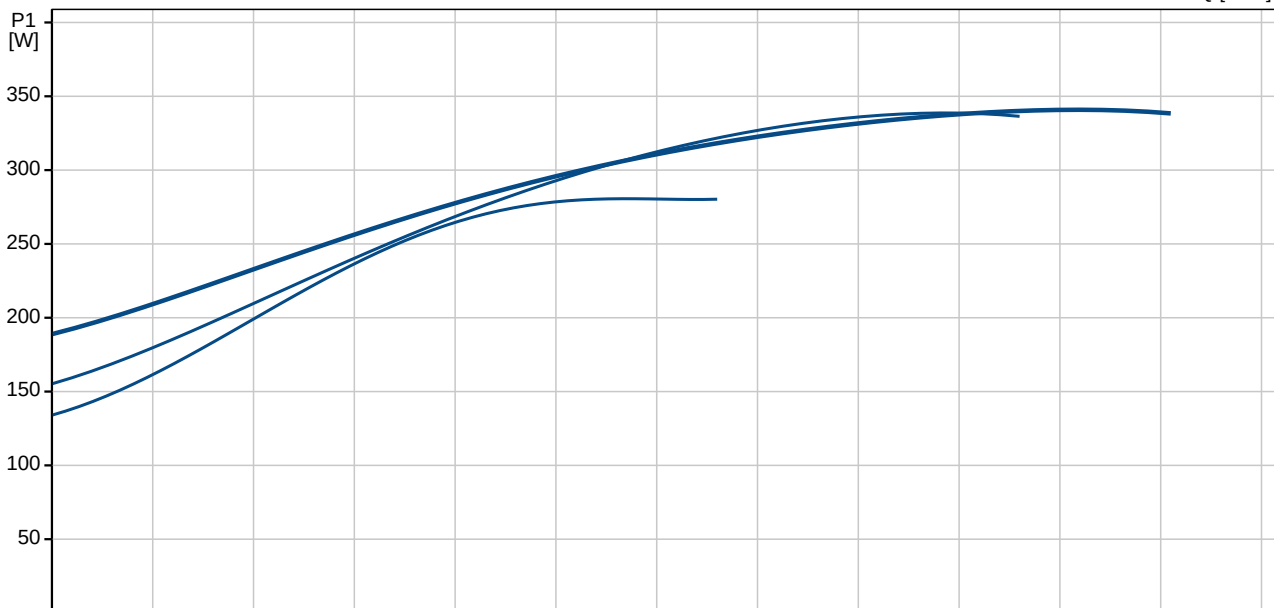

Description	Value
Product name:	UPS 25-100 180
Product No:	95906480
EAN number:	5700311099766
Technical:	
Speed no:	3
Head max:	10 m
TF class:	110
Approvals on nameplate:	CE
Materials:	
Pump housing:	Cast iron
	EN-JL1030
	ASTM 30 B
Impeller:	Composite, PES/PP
Installation:	
Amb. max at 80 dgr C liquid:	313 K
Maximum operating pressure:	1000 kPa
Pipe connection:	G 1 1/2
Pressure stage:	PN 10
Port-to-port length:	180 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	248 .. 383 K
Electrical data:	
Power input in speed 1:	280 W
Power input in speed 2:	340 W
Max. power input:	345 W
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Current in speed 1:	1.3 A
Current in speed 2:	1.5 A
Current in speed 3:	1.52 A
Capacitor size - run:	9.5 µF
Enclosure class (IEC 34-5):	X4D
Insulation class (IEC 85):	H
Motor protec:	CONTACT
Thermal protec:	internal
Controls:	
Pos term box:	9H
Others:	
Net weight:	6.3 kg
Gross weight:	6.8 kg
Shipping volume:	0.012 m3

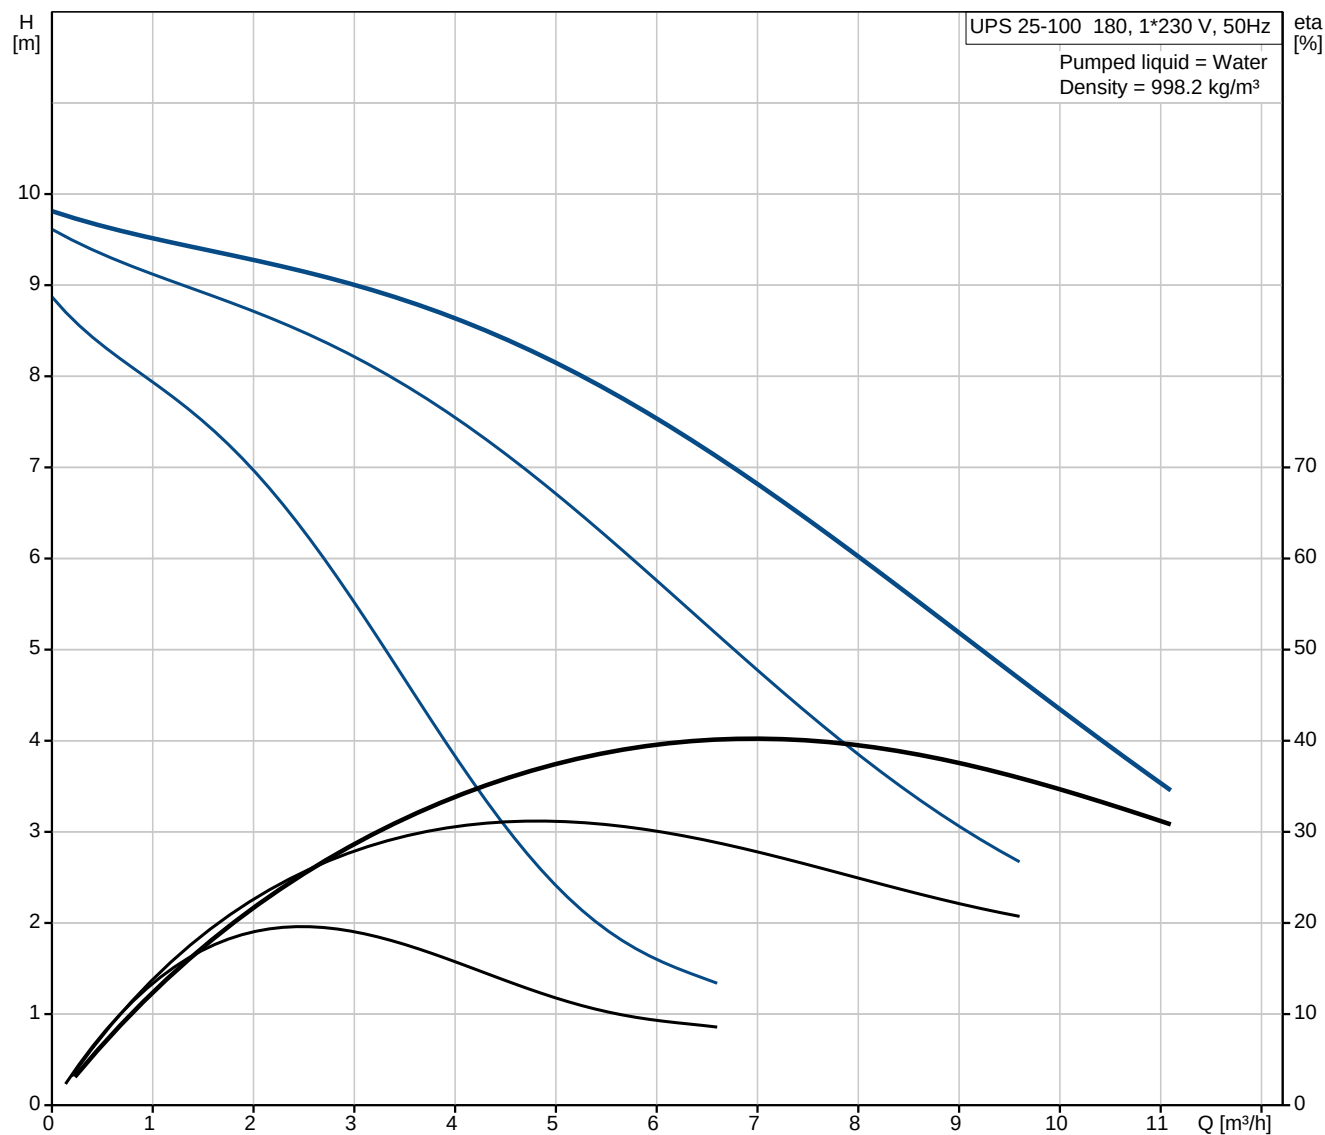